



Bi-Polarized, For Audio Equipment



For Audio Use




Bi-polarized



Anti-Solvent Feature



- Bi-polarized "nichicon MUSE" acoustic series.
- Suited for audio signal circuits.
- Adapted to the RoHS directive (2002/95/EC).

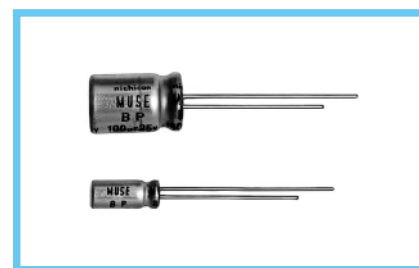

## Specifications

Item	Performance Characteristics							
Category Temperature Range	-40 ~ +85°C							
Rated Voltage Range	6.3 ~ 50V							
Rated Capacitance Range	0.47 ~ 1000μF							
Capacitance Tolerance	±20% at 120Hz, 20°C							
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 3 (μA), whichever is greater.							
tan δ	Measurement frequency : 120Hz, Temperature : 20°C							
	Rated voltage (V)	6.3	10	16	25	35	50	
	tan δ (MAX.)	0.24	0.20	0.16	0.16	0.14	0.12	
Stability at Low Temperature	Measurement frequency : 120Hz							
	Rated voltage (V)		6.3	10	16	25	35	50
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	4	3	2	2	2	2
		Z-40°C / Z+20°C	8	6	4	4	4	4
Endurance	After 1000 hours' application of rated voltage at 85°C with the polarity inverted every 250 hours, capacitors meet the characteristics requirement listed at right.				Capacitance change		Within ±20% of initial value	
					tan δ		150% or less of initial specified value	
					Leakage current		Initial specified value or less	
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.							
Marking	Printed with black color letter on clear green sleeve.							


## Radial Lead Type

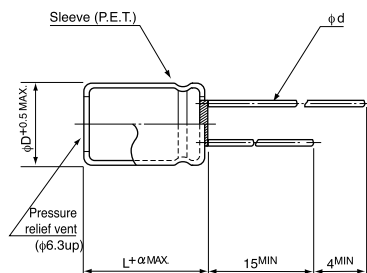

	5	6.3	8	10	12.5	16
φD (mm)	2.0	2.5	3.5	5.0	5.0	7.5
P (mm)	0.6	0.6	0.6	0.6	0.8	0.8

α	(φD < 10) 1.0
	(φD ≥ 10) 1.5

## Type numbering system (Example : 10V 47μF)

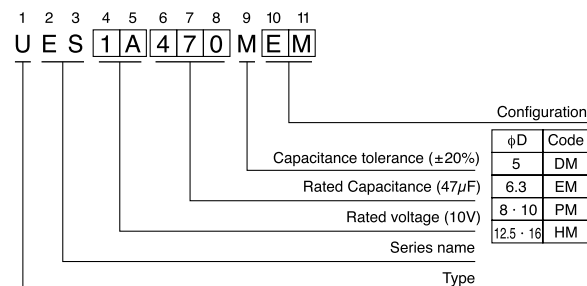

- Please refer to page 21 about the end seal configuration.

## Dimensions

		φD × L (mm)					
V	Code	6.3	10	16	25	35	50
Cap. (μF)		0J	1A	1C	1E	1V	1H
0.47	R47						5 × 11
1	010						5 × 11
2.2	2R2						5 × 11
3.3	3R3						5 × 11
4.7	4R7				5 × 11	5 × 11	6.3 × 11
10	100			5 × 11	5 × 11	6.3 × 11	8 × 11.5
22	220		5 × 11	6.3 × 11	6.3 × 11	8 × 11.5	10 × 12.5
33	330	5 × 11	6.3 × 11	6.3 × 11	8 × 11.5	10 × 12.5	10 × 16
47	470	6.3 × 11	6.3 × 11	8 × 11.5	10 × 12.5	10 × 12.5	10 × 20
100	101	8 × 11.5	10 × 12.5	10 × 12.5	10 × 16	10 × 20	12.5 × 25
220	221	10 × 12.5	10 × 16	10 × 20	12.5 × 25	12.5 × 25	16 × 25
330	331	10 × 16	10 × 20	12.5 × 20	12.5 × 25	16 × 25	16 × 31.5
470	471	10 × 20	12.5 × 20	12.5 × 25	16 × 25	16 × 25	
1000	102	12.5 × 25	16 × 25	16 × 25	16 × 31.5		

Please refer to page 21, 22, 23 about the formed or taped product spec.  
Please refer to page 3 for the minimum order quantity.