

GLASS PASSIVATED BRIDGE RECTIFIERS	<p style="text-align: center;">REVERSE VOLTAGE - 50 to 1000Volts FORWARD CURRENT - 15/25/35/50Amperes</p>
<p>FEATURES</p> <ul style="list-style-type: none"> ●Surge overload -300~450 amperes peak ●Low forward voltage drop ●Mounting position :Any ●Electrically isolated base-2000 Volts ●Solderable 0.25" FASTON terminals ●Materials used carries U/L recognition 	<p>GBPCW</p> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave ,60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	GBPC-W								UNIT
		15005	1501	1502	1504	1506	1508	1510		
		25005	2501	2502	2504	2506	2508	2510		
		35005	3501	3502	3504	3506	3508	3510		
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V	
Maximum RMS Bridge Input Voltage	VRMS	30	70	140	280	420	560	700	V	
Maximum Average Forward Rectified Output Current @ TC=55°C	I(AV)	15		25		35		50	A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load	IFSM	GBPC 10W	300	GBPC 15W	350	GBPC 25W	400	GBPC 35W	450	A
Maximum Forward Voltage Drop Per Element at 5.0/7.5/12.5/17.5 /25.0A Peak	VF	1.1								V
Maximum Reverse Current at Rated DC Blocking Voltage Per Element @ TA=25°C	IR	10								uA
Operating Temperature Range	TJ	-55 to +150								°C
Storage Temperature Range	TSTG	-55 to +150								°C

FIG.1-MAXMUN FORWARD SURGE CURRENT

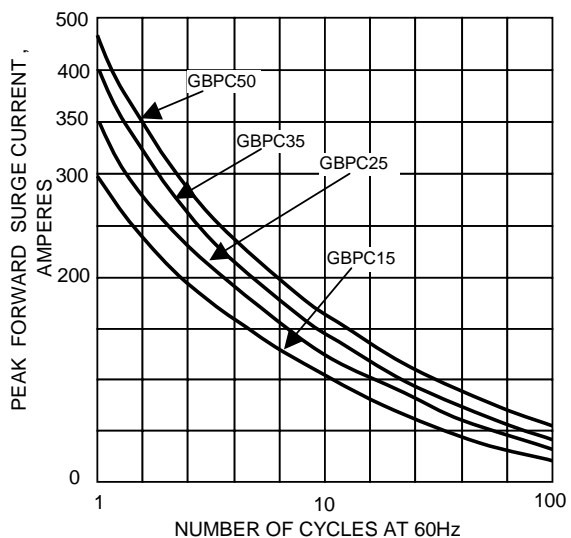


FIG.2- DERATING CURVE OUTPUT RECTIFIED CURRENT

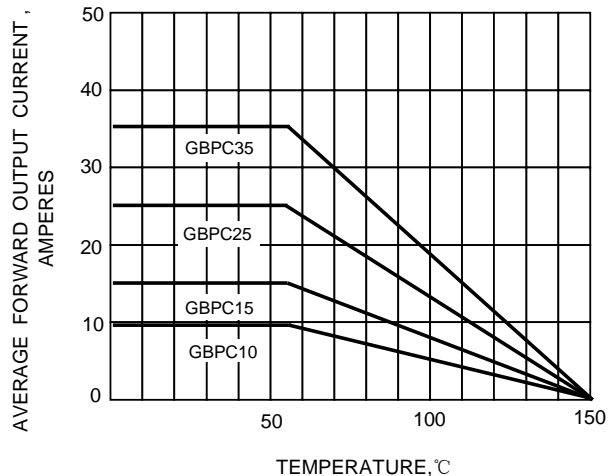


FIG.3-TYPICAL FORWARD CHARACTERISTICS

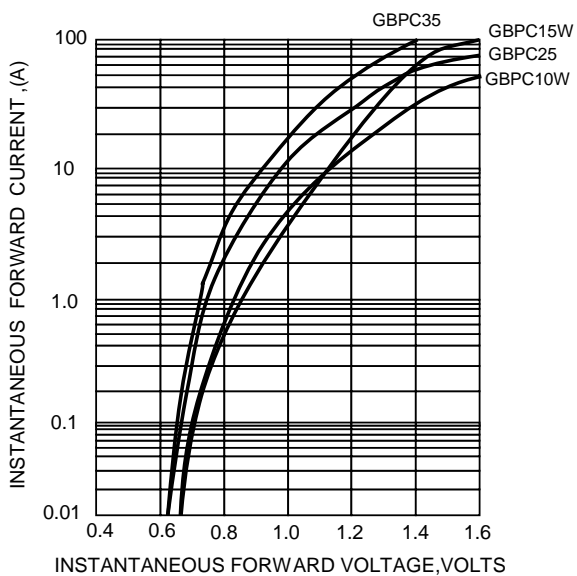


FIG.4-TYPICAL REVERSE CHARACTERISTICS

