


E100 Series

Isolated, Single Output Miniature, 1W SIP DC/DC Converters

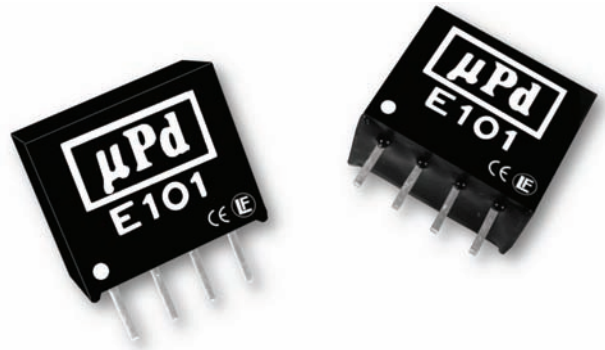

Key Features:

- 1W Output Power
- Miniature SIP Case
- 1,000 VDC Isolation
- Complies to RFI Standards
- >2 MHour MTBF
- 20 Standard Models
- Industry Standard Pin-Out



RoHS Compliant



MicroPower Direct

292 Page Street
Ste D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerelectronics.com
W: www.micropowerelectronics.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
	24 VDC Input	21.6	24.0	26.4	
	48 VDC Input	43.2	48.0	52.8	
Reverse Polarity Input Current				0.3	A
Input Filter	Internal Capacitor				

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy				±3.0	%
Line Regulation	For Vin Change of 1%		±1.2		%
Load Regulation (Note 1)	See Model Selection Guide				
Ripple & Noise (20 MHz) (Note 2)			60		mV P - P
Output Power Protection		110			%
Temperature Coefficient			±0.01	±0.02	%/°C
Output Short Circuit	Momentary (0.5 Sec.)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
Isolation Resistance	1,000 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		60		pF
Switching Frequency			50		kHz
EMI/RFI	EN55022 A, EN55024 A, IEC 61000-4-2, IEC 61000-4-3, FCC 47 CFR Part 15 B				

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Operating Temperature Range	Case			+100	°C
Storage Temperature Range		-40		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size (5V, 12V & 24V Input Models)	0.46 x 0.24 x 0.40 Inches (11.68 x 6.0 x 10.2 mm)
Case Size (48V Input Models)	0.46 x 0.29 x 0.40 Inches (11.68 x 7.5 x 10.2 mm)
Case Material	Non-Conductive Black Plastic (UL94-V0)
Weight	0.06 Oz (1.8g)

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	2.0			MHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		7.0	VDC
	12 VDC Input	-0.7		15.0	
	24 VDC Input	-0.7		28.0	
	48 VDC Input	-0.7		54.0	
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C
Internal Power Dissipation	All Models			650	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

Model Selection Guide


Model Number	Input				Output			Load Regulation (% Max)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
E101	5	4.5 - 5.5	267	25	5.0	200.0	4.0	10	75	500
E102	5	4.5 - 5.5	260	25	9.0	111.0	2.0	10	77	500
E103	5	4.5 - 5.5	256	25	12.0	83.3	2.0	10	78	500
E104	5	4.5 - 5.5	257	25	15.0	66.6	2.0	10	78	500
E105	5	4.5 - 5.5	257	25	24.0	41.6	2.0	10	78	500
E111	12	10.8 - 13.2	112	16	5.0	200.0	4.0	10	75	200
E112	12	10.8 - 13.2	109	16	9.0	111.0	2.0	10	77	200
E113	12	10.8 - 13.2	107	16	12.0	83.3	2.0	10	78	200
E114	12	10.8 - 13.2	107	16	15.0	66.6	2.0	10	78	200
E115	12	10.8 - 13.2	107	16	24.0	41.6	2.0	10	78	200
E121	24	21.6 - 26.4	56	10	5.0	200.0	4.0	10	75	100
E122	24	21.6 - 26.4	55	10	9.0	111.0	2.0	10	77	100
E123	24	21.6 - 26.4	54	10	12.0	83.3	2.0	10	78	100
E124	24	21.6 - 26.4	54	10	15.0	66.6	2.0	10	78	100
E125	24	21.6 - 26.4	54	10	24.0	41.6	2.0	10	78	100
E131	48	43.2 - 52.8	28	7	5.0	200.0	4.0	10	75	50
E132	48	43.2 - 52.8	27	7	9.0	111.0	2.0	10	76	50
E133	48	43.2 - 52.8	27	7	12.0	83.3	2.0	10	76	50
E134	48	43.2 - 52.8	27	7	15.0	66.6	2.0	10	76	50
E135	48	43.2 - 52.8	27	7	24.0	41.6	2.0	10	76	50

Models with other outputs are available. Contact the factory for details!!

Notes:

- Output load regulation is specified for a load change of 20% to 100%.
- When measuring output ripple, it is recommended that an external 0.33 μF ceramic capacitor be placed from the +Vout pin to the -Vout pin.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- The 5V, 12V and 24V input units do not require external components to operate, but the use of a low ESR capacitor (approximately 10 μF , ESR < 1.0 Ω at 100 kHz) mounted close to the converter input pins is recommended. For 48VDC input units, an input capacitor should always be used. Dependent upon the application, a value between 4.7 μF and 47 μF should be sufficient.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

Derating Curve

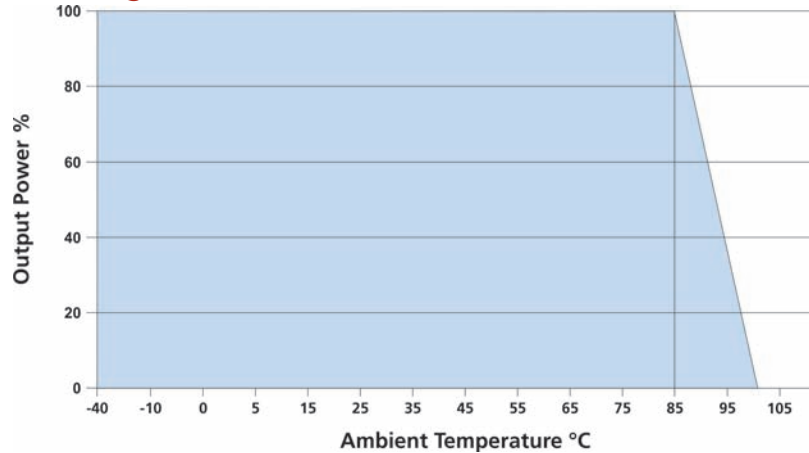

Pin Connections

Capacitive Load

(μF Max)

220


Pin	Description
1	-Vin
2	+Vin
3	-Vout
4	+Vout

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ± 0.01 (± 0.25)
- Pin 1 is marked by a "dot" or indentation on the side of the unit
- Dimensions indicated on the drawing are as follows:

Dimension	Input Voltage	
	5, 12 & 24V	48V
"W"	0.24 (6.0)	0.29 (7.5)
"X"	0.05 (1.25)	0.08 (2.00)

Mechanical Dimensions

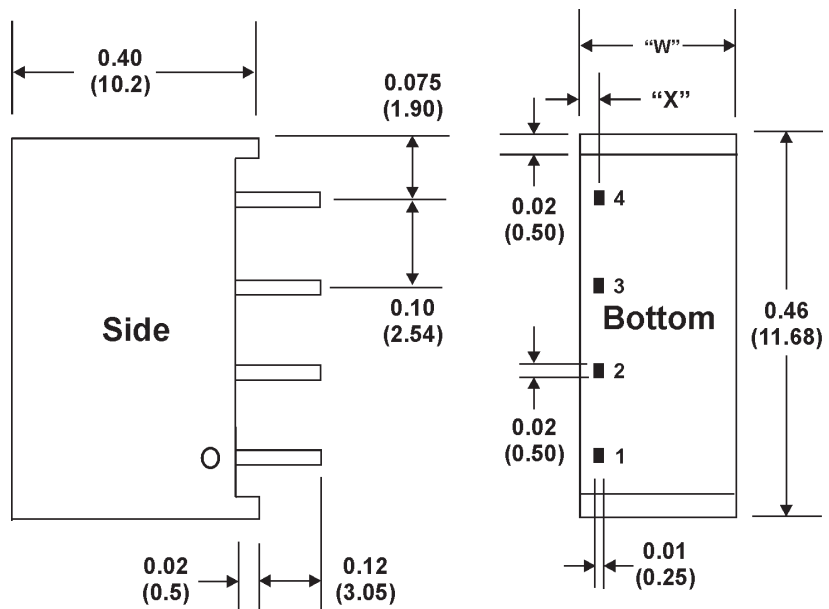

MicroPower Direct

www.micropowerdirect.com

292 Page Street Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • E-Mail: sales@micropowerdirect.com