



# PD55003-E PD55003S-E

## RF POWER transistor, LdmoST plastic family N-channel enhancement-mode, lateral MOSFETs

### Features

- Excellent thermal stability
- Common source configuration
- $P_{OUT} = 3\text{ W}$  with 17dB gain @ 500 MHz / 12.5 V
- New RF plastic package

### Description

The PD55003-E is a common source N-channel, enhancement-mode lateral Field-Effect RF power transistor. It is designed for high gain, broad band commercial and industrial applications. It operates at 12 V in common source mode at frequencies of up to 1 GHz. PD55003 boasts the excellent gain, linearity and reliability of ST's latest LDMOS technology mounted in the first true SMD plastic RF power package, PowerSO-10RF. PD55003's superior linearity performance makes it an ideal solution for car mobile radio.

The PowerSO-10 plastic package, designed to offer high reliability, is the first ST JEDEC approved, high power SMD package. It has been specially optimized for RF needs and offers excellent RF performances and ease of assembly.

Mounting recommendations are available in [www.st.com/rf/](http://www.st.com/rf/) (look for application note AN1294)

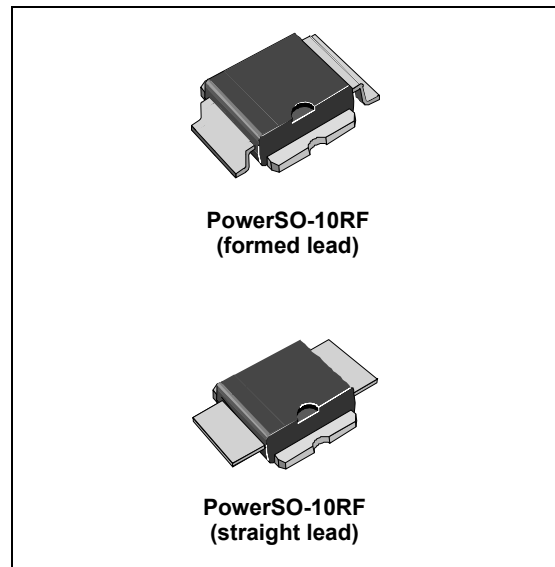


Figure 1. Pin connection

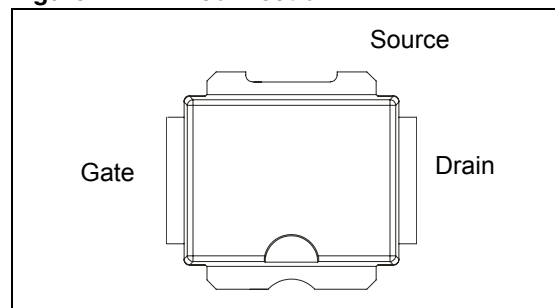


Table 1. Device summary

| Order code   | Package                      | Packing       |
|--------------|------------------------------|---------------|
| PD55003-E-E  | PowerSO-10RF (formed lead)   | Tube          |
| PD55003S-E-E | PowerSO-10RF (straight lead) | Tube          |
| PD55003TR-E  | PowerSO-10RF (formed lead)   | Tape and reel |
| PD55003STR-E | PowerSO-10RF (straight lead) | Tape and reel |

## Contents

|           |  |           |
|-----------|--|-----------|
| <b>1</b>  | <b>Electrical data</b> .....               | <b>3</b>  |
| 1.1       | Maximum ratings .....                      | 3         |
| 1.2       | Thermal data .....                         | 3         |
| <b>2</b>  | <b>Electrical characteristics</b> .....    | <b>4</b>  |
| 2.1       | Static .....                               | 4         |
| 2.2       | Dynamic .....                              | 4         |
| 2.3       | Moisture sensitivity level .....           | 4         |
| <b>3</b>  | <b>Impedance</b> .....                     | <b>5</b>  |
| <b>4</b>  | <b>Typical performance</b> .....           | <b>6</b>  |
| 4.1       | PD54003-E .....                            | 7         |
| 4.2       | PD54003S-E .....                           | 10        |
| <b>5</b>  | <b>Typical performance (860 MHz)</b> ..... | <b>12</b> |
| 5.1       | PD55003-E .....                            | 12        |
| <b>6</b>  | <b>Test circuit</b> .....                  | <b>13</b> |
| <b>7</b>  | <b>Circuit layout</b> .....                | <b>15</b> |
| <b>8</b>  | <b>Common source s-parameter</b> .....     | <b>16</b> |
| <b>9</b>  | <b>Package mechanical data</b> .....       | <b>22</b> |
| <b>10</b> | <b>Revision history</b> .....              | <b>28</b> |

# 1 Electrical data

## 1.1 Maximum ratings

**Table 2. Absolute maximum ratings ( $T_{CASE} = 25^{\circ}C$ )**

| Symbol        | Parameter                                  | Value       | Unit        |
|---------------|--|-------------|-------------|
| $V_{(BR)DSS}$ | Drain-source voltage                       | 40          | V           |
| $V_{GS}$      | Gate-source voltage                        | $\pm 20$    | V           |
| $I_D$         | Drain current                              | 2.5         | A           |
| $P_{DISS}$    | Power dissipation (@ $T_C = 70^{\circ}C$ ) | 31.7        | W           |
| $T_J$         | Max. operating junction temperature        | 165         | $^{\circ}C$ |
| $T_{STG}$     | Storage temperature                        | -65 to +150 | $^{\circ}C$ |

## 1.2 Thermal data

**Table 3. Thermal data**

| Symbol     | Parameter                          | Value | Unit          |
|------------|------------------------------------|-------|---------------|
| $R_{thJC}$ | Junction - case thermal resistance | 3.0   | $^{\circ}C/W$ |

## 2 Electrical characteristics

$T_{CASE} = +25\text{ }^{\circ}\text{C}$

### 2.1 Static

**Table 4. Static**

| Symbol       | Test conditions        |                          | Min | Typ | Max  | Unit          |
|--------------|------------------------|--------------------------|-----|-----|------|---------------|
| $I_{DSS}$    | $V_{GS} = 0$           | $V_{DS} = 28\text{ V}$   |     |     | 1    | $\mu\text{A}$ |
| $I_{GSS}$    | $V_{GS} = 20\text{ V}$ | $V_{DS} = 0$             |     |     | 1    | $\mu\text{A}$ |
| $V_{GS(Q)}$  | $V_{DS} = 10\text{ V}$ | $I_D = 50\text{ mA}$     | 2.0 |     | 5.0  | V             |
| $R_{DS(ON)}$ | $V_{GS} = 10\text{ V}$ | $I_D = 1\text{ A}$       |     |     | 0.75 | $\Omega$      |
| $g_{FS}$     | $V_{DS} = 10\text{ V}$ | $I_D = 1\text{ A}$       |     | 1.0 |      | mho           |
| $C_{ISS}$    | $V_{GS} = 0$           | $V_{DS} = 12.5\text{ V}$ |     | 36  |      | pF            |
| $C_{OSS}$    | $V_{GS} = 0$           | $V_{DS} = 12.5\text{ V}$ |     | 24  |      | pF            |
| $C_{RSS}$    | $V_{GS} = 0$           | $V_{DS} = 12.5\text{ V}$ |     | 2.4 |      | pF            |

### 2.2 Dynamic

**Table 5. Dynamic**

| Symbol        | Test conditions  | Min  | Typ | Max | Unit |
|---------------|--|------|-----|-----|------|
| $P_{1dB}$     | $V_{DD} = 12.5\text{ V}$ , $I_{DQ} = 50\text{ mA}$ $f = 500\text{ MHz}$  | 3    |     |     | W    |
| $G_P$         | $V_{DD} = 12.5\text{ V}$ , $I_{DQ} = 50\text{ mA}$ , $P_{OUT} = 3\text{ W}$ , $f = 500\text{ MHz}$                     | 14   | 17  |     | dB   |
| $h_D$         | $V_{DD} = 12.5\text{ V}$ , $I_{DQ} = 50\text{ mA}$ , $P_{OUT} = 3\text{ W}$ , $f = 500\text{ MHz}$                     | 45   | 52  |     | %    |
| Load mismatch | $V_{DD} = 15.5\text{ V}$ , $I_{DQ} = 50\text{ mA}$ , $P_{OUT} = 3\text{ W}$ , $f = 500\text{ MHz}$<br>All phase angles | 20:1 |     |     | VSWR |

### 2.3 Moisture sensitivity level

**Table 6. Moisture sensitivity level**

| Test methodology | Rating |
|------------------|--------|
| J-STD-020B       | MSL 3  |

### 3 Impedance

Figure 2. Current conventions

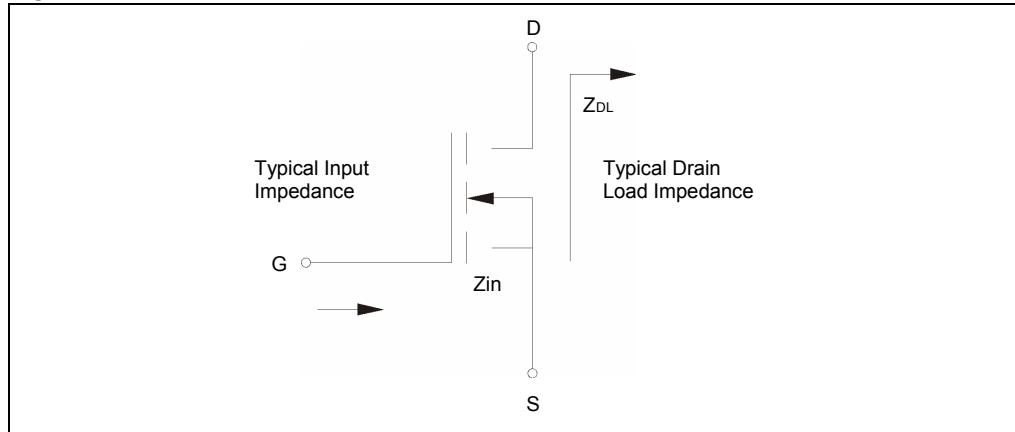


Table 7. Impedance data

| PD55003-E   |                     |                     | PD55003S-E  |                     |                     |
|-------------|---------------------|---------------------|-------------|---------------------|---------------------|
| Freq. (MHz) | Z <sub>IN</sub> (Ω) | Z <sub>DL</sub> (Ω) | Freq. (MHz) | Z <sub>IN</sub> (Ω) | Z <sub>DL</sub> (Ω) |
| 520         | 1.871 - j 1.118     | 4.779 + j 4.956     | 520         | 1.407 - j 3.550     | 6.557 + j 7.844     |
| 500         | 1.542 - j 3.705     | 6.842 + j 6.209     | 500         | 1.306 - j 5.159     | 8.351 + j 9.120     |
| 480         | 1.109 - j 1.783     | 6.789 + j 4.533     | 480         | 1.302 - j 6.141     | 8.994 + j 8.983     |
| 860         | 1.33 + j 1.23       | 2.93 + j 0.62       |             |                     |                     |

## 4 Typical performance

Figure 3. Capacitance vs drain voltage

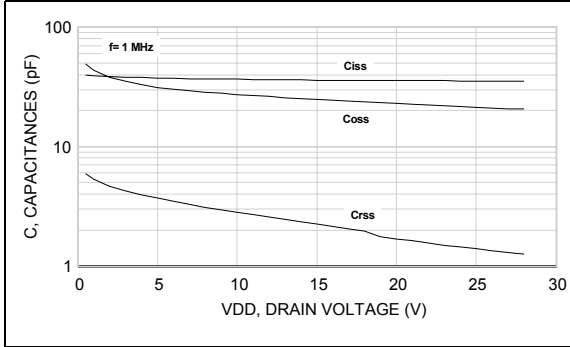


Figure 4. Drain current vs gate-source voltage


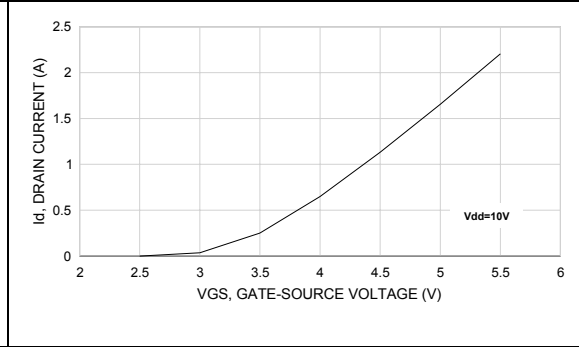


Figure 5. Gate-source voltage vs case temperature

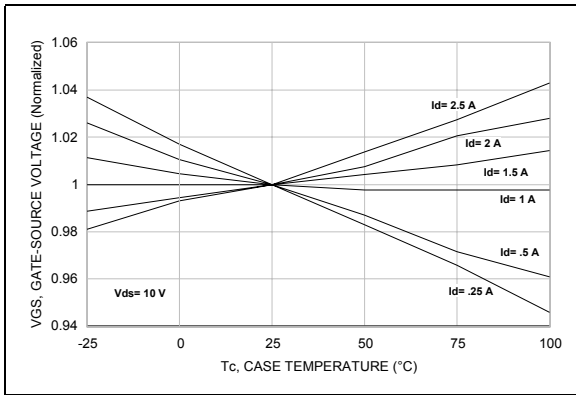

### 4.1 PD54003-E

Figure 6. Output power vs input power

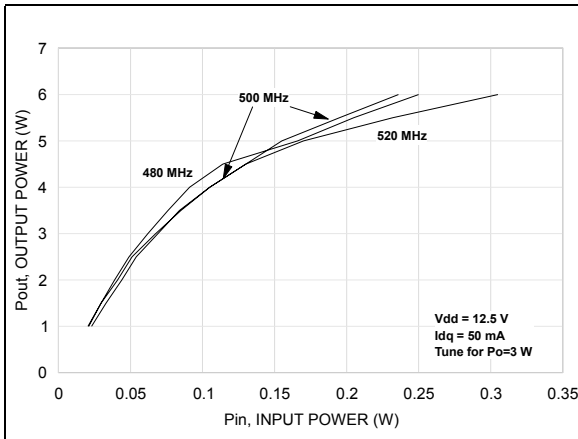


Figure 7. Output power vs input power

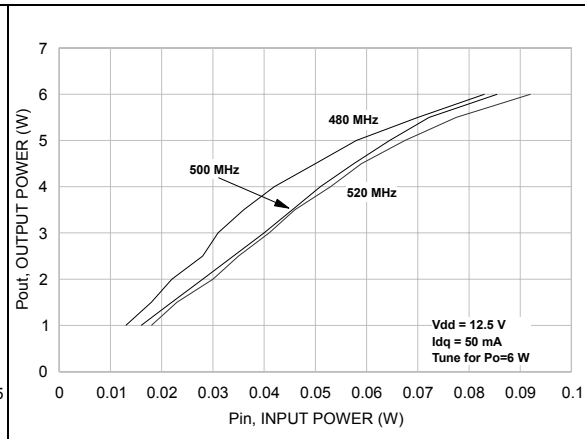


Figure 8. Drain efficiency vs output power

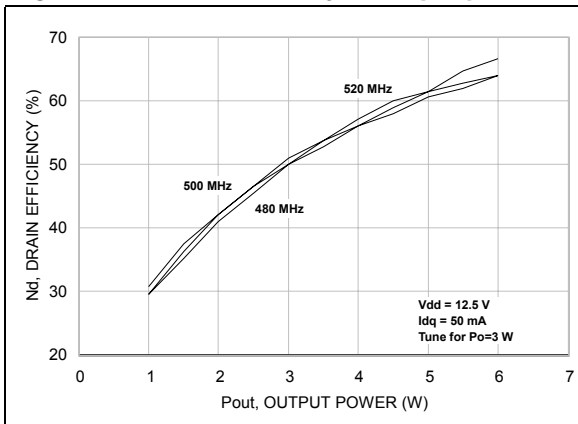


Figure 9. Drain efficiency vs output power

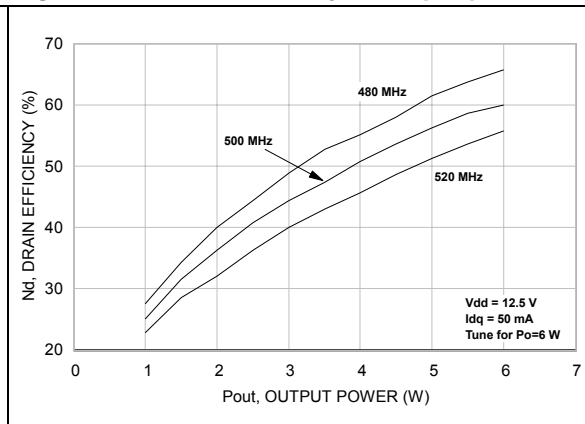


Figure 10. Power gain vs output power

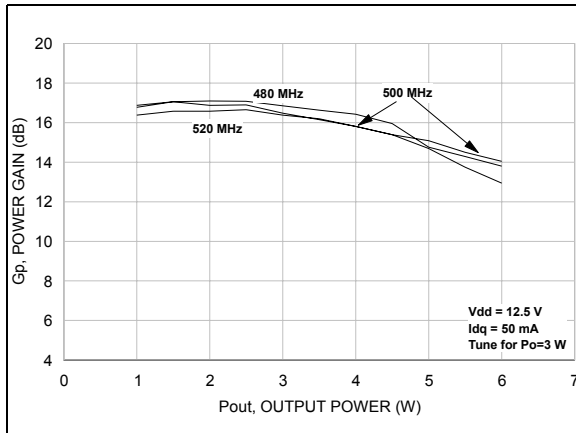


Figure 11. Return loss vs output power

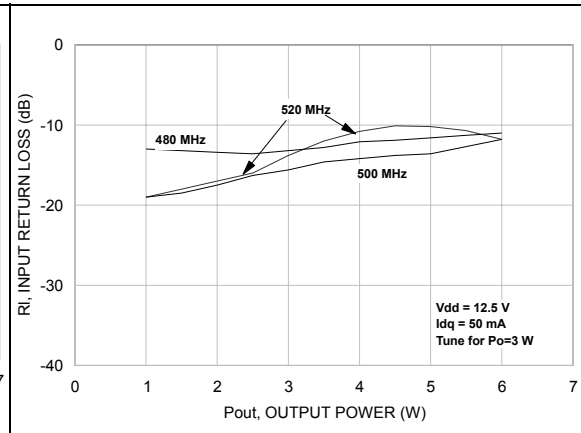


Figure 12. Output power vs bias current

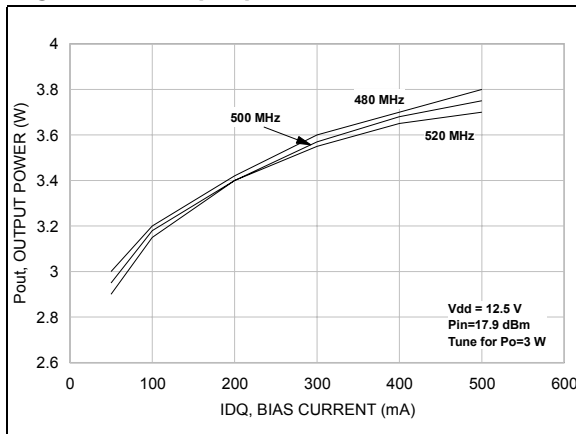


Figure 13. Drain efficiency vs bias current

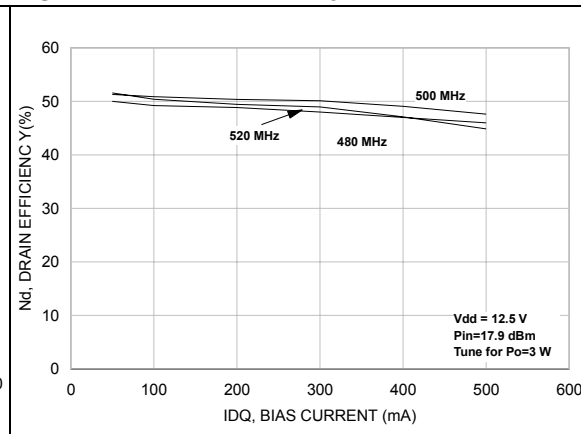


Figure 14. Output power vs supply voltage

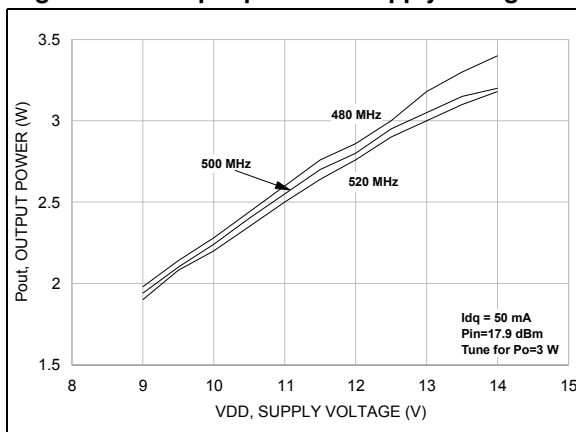


Table 8. Drain efficiency vs supply voltage


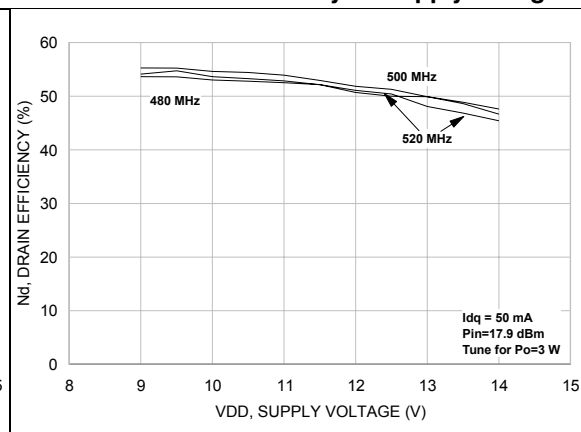




Figure 15. Output power vs gate voltage

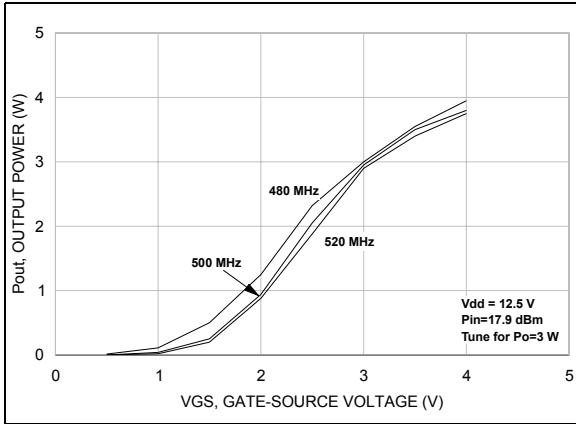

## 4.2 PD54003S-E

Figure 16. Output power vs input power

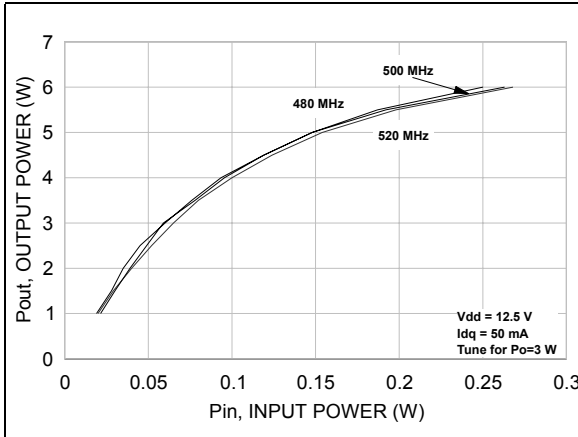


Figure 17. Output power vs input power

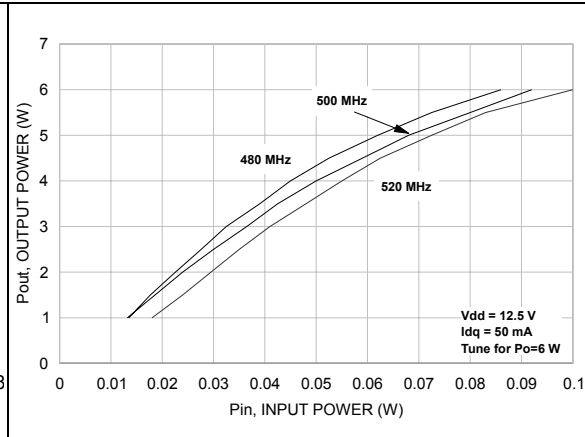


Figure 18. Drain efficiency vs output power

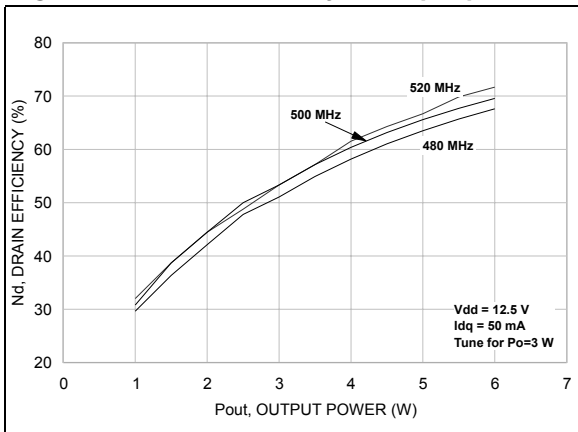


Figure 19. Drain efficiency vs output power

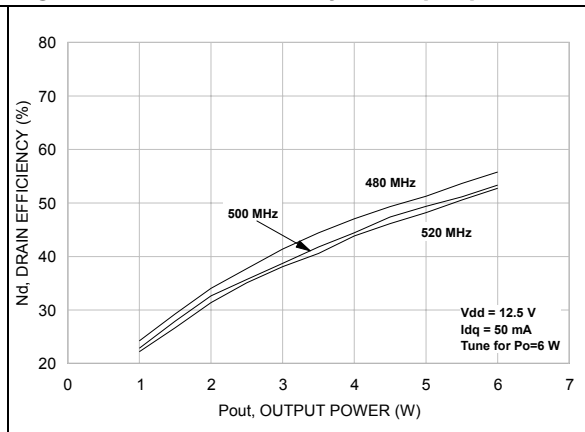


Figure 20. Power gain vs output power

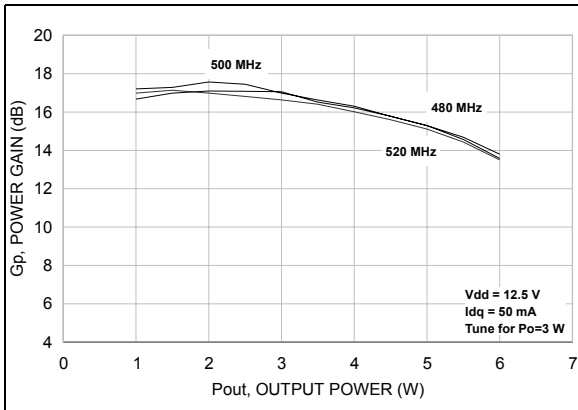


Figure 21. Return loss vs output power

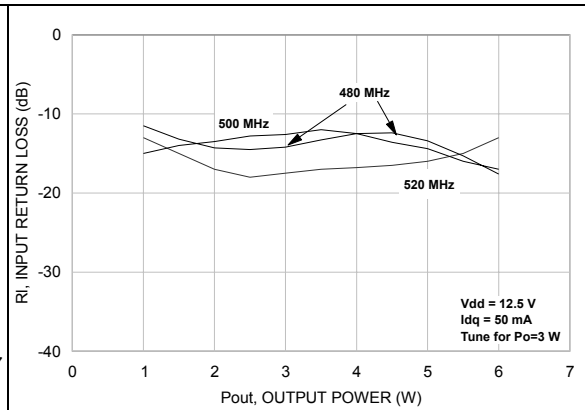


Figure 22. Output power vs bias current

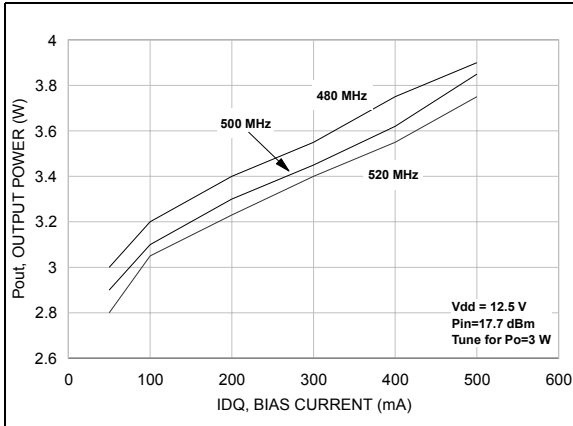


Figure 23. Drain efficiency vs bias current

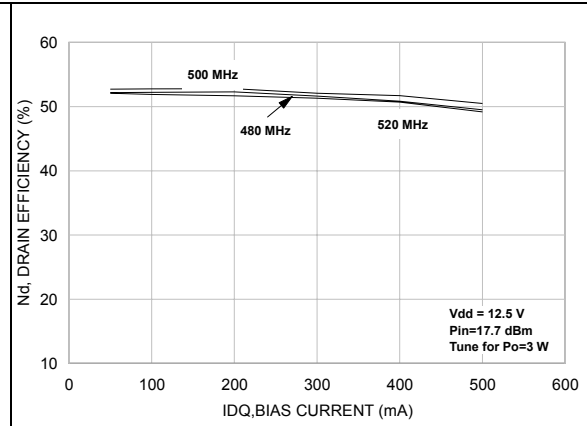


Figure 24. Output power vs supply voltage

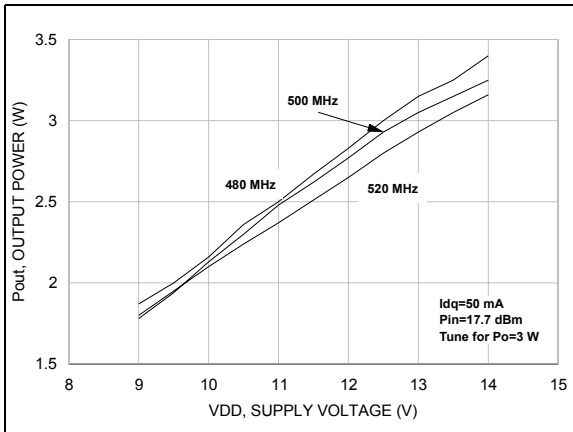


Figure 25. Drain efficiency vs supply voltage


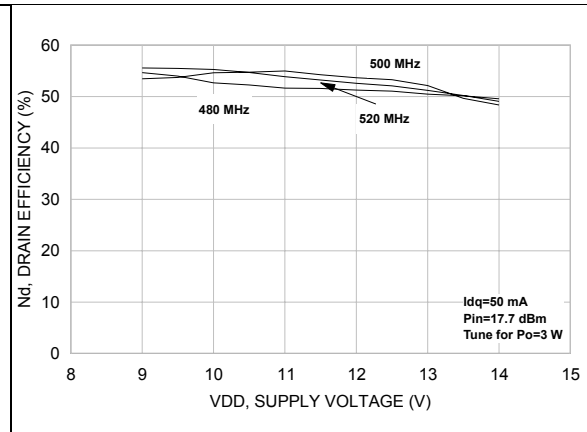


Figure 26. Output power vs gate voltage

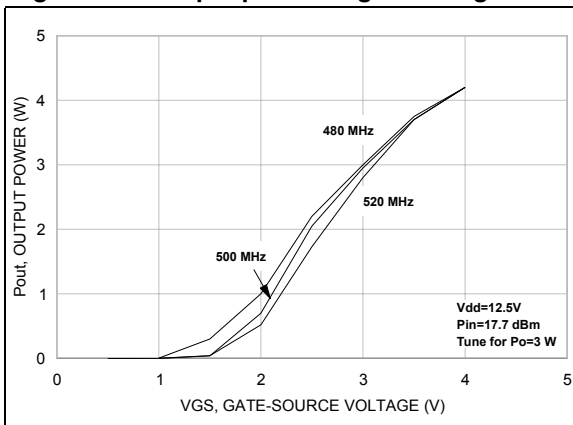

## 5 Typical performance (860 MHz)

### 5.1 PD55003-E

Figure 27. Output power vs input power

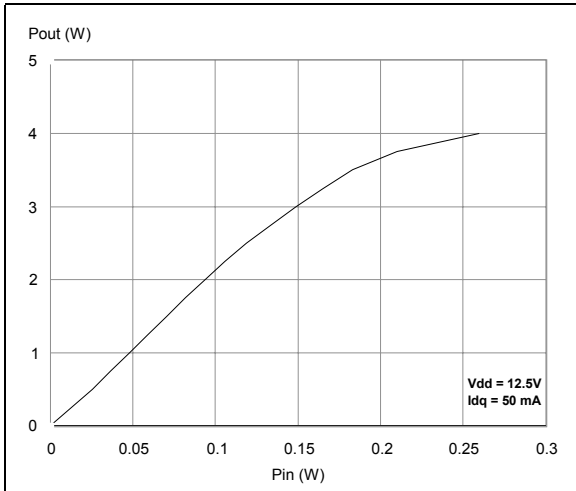


Figure 28. Drain efficiency vs output power


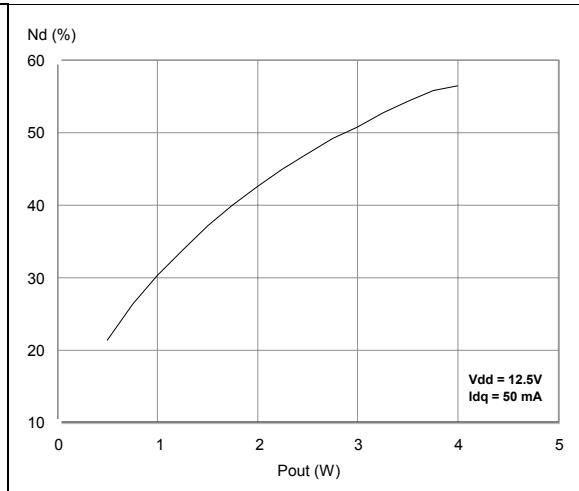


Figure 29. Input return loss vs output power

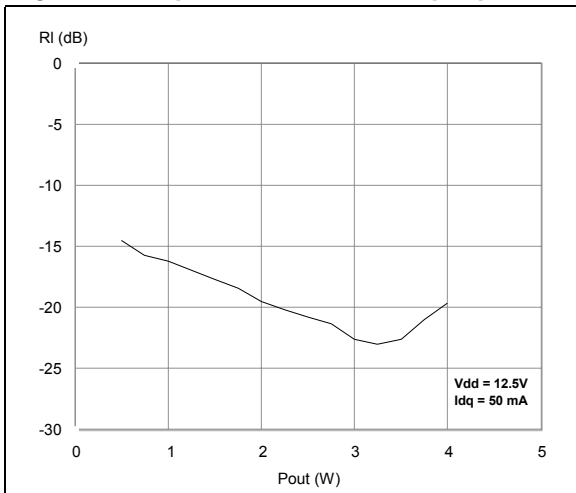

## 6 Test circuit

Figure 30. Test circuit schematic

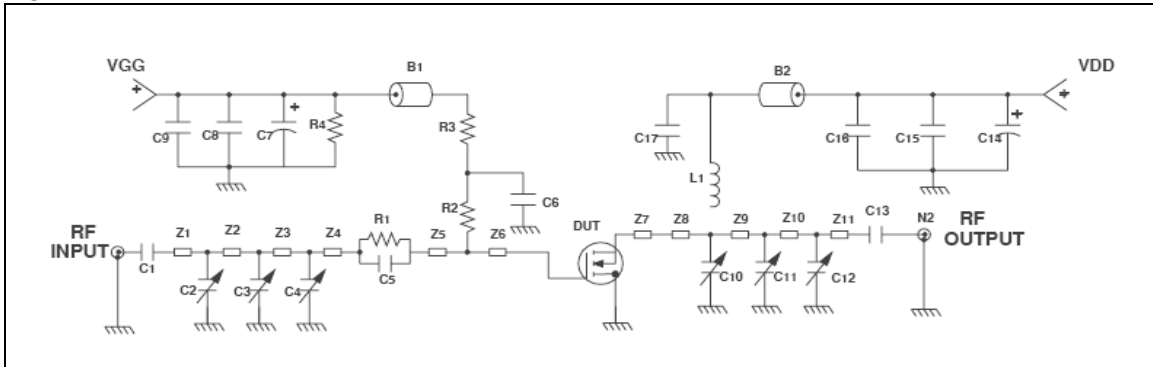


Table 9. Test circuit component part list

| Component            | Description  |
|----------------------|--|
| B1,B2                | Short ferrit bead, fair rite products (2743021446) |
| C1,C14               | 240 pF, 100 mil chip capacitor                     |
| C2,C3,C4,C10,C11,C12 | 0 TO 20 pF trimmer capacitor                       |
| C5                   | 130 pF, 100 mil chip cap                           |
| C6,C17               | 120 pF, 100 mil chip cap                           |
| C7,C14               | 10 $\mu$ F, 50 V electrolytic capacitor            |
| C8,C15               | 1.200 pF, 100 mil chip cap                         |
| C9,C16               | 0.1 F, 100 mil chip cap                            |
| L1                   | 55.5 nH, 5 turn, Coilcraft                         |
| N1,N2                | Type N flange mount                                |
| R1                   | 15 $\Omega$ , 0805 chip resistor                   |
| R2                   | 1.0 k $\Omega$ , 1/8 W resistor                    |
| R3                   | 15 $\Omega$ , 0805 chip resistor                   |
| R4                   | 33 k $\Omega$ , 1/8 W resistor                     |
| Z1                   | 0.175" X 0.080" microstrip                         |
| Z2                   | 1.049" X 0.080" microstrip                         |
| Z3                   | 0.289" X 0.080" microstrip                         |
| Z4                   | 0.026" X 0.080" microstrip                         |
| Z5                   | 0.192" X 0.223" microstrip                         |
| Z6,Z7                | 0.260" X 0.223" microstrip                         |
| Z8                   | 0.064" X 0.080" microstrip                         |
| Z9                   | 0.334" X 0.080" microstrip                         |

**Table 9. Test circuit component part list (continued)**

| Component | Description   |
|-----------|---|
| Z10       | 0.985" X 0.080" microstrip  |
| Z11       | 0.472" X 0.080" microstrip  |
| Board     | Roger ultra LAM 2000 THK 0.030" $\epsilon_r = 2.55$ 2oz ED C $\mu$ both sides |

# 7 Circuit layout

Figure 31. Test fixture component layout


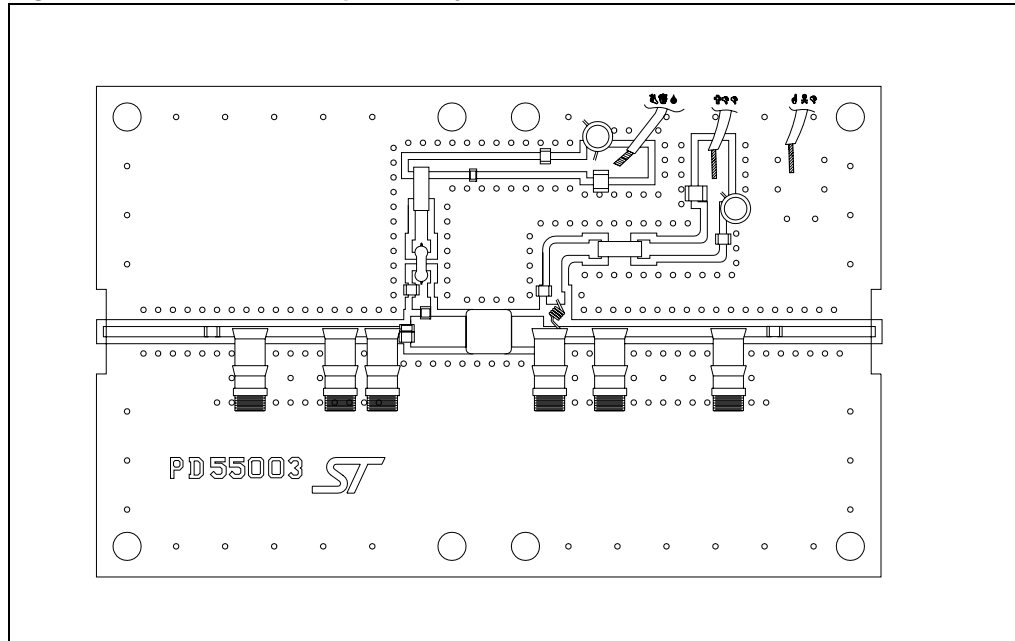


Figure 32. Test circuit photomaster

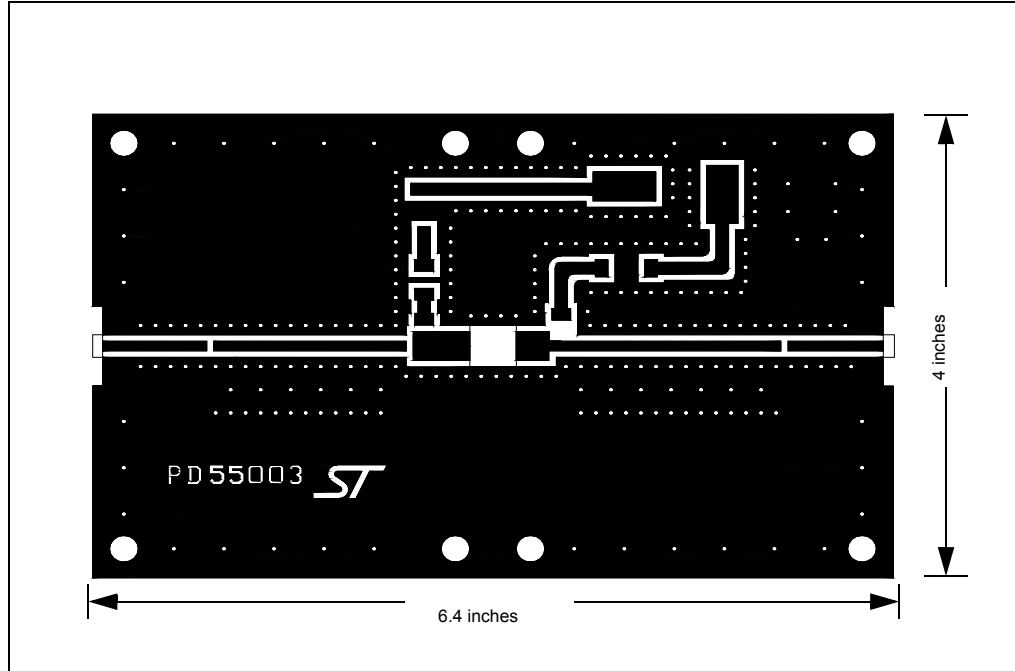

## 8 Common source s-parameter

Table 10. S-parameter for PD55003-E ( $V_{DS} = 12.5$  V,  $I_{DS} = 0.15$  A)

| Freq (MHz) | $ S_{11} $ | $S_{11}\angle\Phi$ | $ S_{21} $ | $S_{21}\angle\Phi$ | $ S_{12} $ | $S_{12} - DF$ | $ S_{22} $ | $S_{22} - DF$ |
|------------|------------|--------------------|------------|--------------------|------------|---------------|------------|---------------|
| 50         | 0.780      | -120               | 21.77      | 106                | 0.038      | 19            | 0.669      | -111          |
| 100        | 0.764      | -144               | 11.34      | 88                 | 0.040      | -1            | 0.643      | -137          |
| 150        | 0.786      | -154               | 7.47       | 77                 | 0.040      | -10           | 0.634      | -145          |
| 200        | 0.804      | -159               | 5.45       | 69                 | 0.037      | -19           | 0.660      | -149          |
| 250        | 0.817      | -163               | 4.22       | 61                 | 0.036      | -26           | 0.680      | -152          |
| 300        | 0.835      | -165               | 3.36       | 55                 | 0.034      | -31           | 0.720      | -156          |
| 350        | 0.852      | -167               | 2.75       | 48                 | 0.031      | -36           | 0.766      | -158          |
| 400        | 0.865      | -169               | 2.28       | 43                 | 0.028      | -41           | 0.786      | -160          |
| 450        | 0.877      | -171               | 1.92       | 38                 | 0.027      | -45           | 0.816      | -161          |
| 500        | 0.889      | -172               | 1.65       | 34                 | 0.025      | -49           | 0.827      | -163          |
| 550        | 0.899      | -174               | 1.42       | 30                 | 0.022      | -52           | 0.847      | -165          |
| 600        | 0.909      | -175               | 1.24       | 27                 | 0.021      | -51           | 0.856      | -167          |
| 650        | 0.918      | -177               | 1.09       | 23                 | 0.018      | -56           | 0.874      | -169          |
| 700        | 0.924      | -178               | 0.97       | 20                 | 0.018      | -54           | 0.881      | -170          |
| 750        | 0.926      | -179               | 0.87       | 17                 | 0.016      | -61           | 0.895      | -172          |
| 800        | 0.929      | 180                | 0.78       | 15                 | 0.014      | -62           | 0.906      | -173          |
| 850        | 0.935      | 179                | 0.71       | 12                 | 0.011      | -56           | 0.916      | -174          |
| 900        | 0.938      | 178                | 0.65       | 10                 | 0.011      | -63           | 0.913      | -175          |
| 950        | 0.940      | 177                | 0.59       | 8                  | 0.010      | -62           | 0.925      | -177          |
| 1000       | 0.941      | 176                | 0.55       | 5                  | 0.007      | -69           | 0.928      | -178          |
| 1050       | 0.944      | 175                | 0.51       | 3                  | 0.007      | -57           | 0.925      | -180          |
| 1100       | 0.947      | 174                | 0.47       | 1                  | 0.006      | -56           | 0.929      | -180          |
| 1150       | 0.946      | 173                | 0.44       | -1                 | 0.005      | -53           | 0.928      | 179           |
| 1200       | 0.944      | 172                | 0.41       | -3                 | 0.004      | -40           | 0.927      | 178           |
| 1250       | 0.949      | 171                | 0.38       | -5                 | 0.004      | -54           | 0.928      | 176           |
| 1300       | 0.949      | 170                | 0.36       | -7                 | 0.003      | -63           | 0.940      | 176           |
| 1350       | 0.947      | 169                | 0.34       | -9                 | 0.001      | -15           | 0.935      | 175           |
| 1400       | 0.949      | 168                | 0.31       | -10                | 0.001      | 82            | 0.938      | 175           |
| 1450       | 0.946      | 167                | 0.29       | -12                | 0.002      | 76            | 0.933      | 174           |
| 1500       | 0.948      | 167                | 0.27       | -12                | 0.002      | 124           | 0.939      | 173           |



Table 11. S-parameter PD55003-E ( $V_{DS} = 12.5$  V,  $I_{DS} = 0.8$  A)

| Freq (MHz) | $ S_{11} $ | $S_{11}\angle\Phi$ | $ S_{21} $ | $S_{21}\angle\Phi$ | $ S_{12} $ | $S_{12} - DF$ | $ S_{22} $ | $S_{22} - DF$ |
|------------|------------|--------------------|------------|--------------------|------------|---------------|------------|---------------|
| 50         | 0.786      | -138               | 26.54      | 100                | 0.026      | 13            | 0.666      | -137          |
| 100        | 0.791      | -156               | 13.46      | 87                 | 0.026      | 0             | 0.674      | -155          |
| 150        | 0.816      | -163               | 8.94       | 80                 | 0.027      | -5            | 0.662      | -160          |
| 200        | 0.829      | -167               | 6.63       | 73                 | 0.026      | -13           | 0.678      | -163          |
| 250        | 0.835      | -170               | 5.24       | 67                 | 0.025      | -16           | 0.677      | -164          |
| 300        | 0.846      | -171               | 4.26       | 62                 | 0.025      | -21           | 0.709      | -167          |
| 350        | 0.854      | -173               | 3.57       | 56                 | 0.023      | -25           | 0.736      | -167          |
| 400        | 0.864      | -174               | 3.01       | 51                 | 0.021      | -31           | 0.758      | -168          |
| 450        | 0.872      | -175               | 2.58       | 47                 | 0.021      | -31           | 0.783      | -167          |
| 500        | 0.878      | -176               | 2.24       | 43                 | 0.019      | -34           | 0.787      | -168          |
| 550        | 0.890      | -177               | 1.97       | 39                 | 0.018      | -37           | 0.800      | -170          |
| 600        | 0.896      | -178               | 1.74       | 36                 | 0.017      | -39           | 0.816      | -171          |
| 650        | 0.902      | -179               | 1.56       | 32                 | 0.014      | -44           | 0.827      | -173          |
| 700        | 0.910      | 180                | 1.41       | 29                 | 0.015      | -38           | 0.845      | -173          |
| 750        | 0.909      | 179                | 1.27       | 26                 | 0.012      | -46           | 0.854      | -175          |
| 800        | 0.917      | 178                | 1.16       | 23                 | 0.011      | -41           | 0.865      | -175          |
| 850        | 0.918      | 177                | 1.06       | 21                 | 0.008      | -37           | 0.879      | -176          |
| 900        | 0.925      | 176                | 0.97       | 18                 | 0.010      | -43           | 0.877      | -177          |
| 950        | 0.926      | 175                | 0.90       | 15                 | 0.008      | -47           | 0.887      | -179          |
| 1000       | 0.927      | 174                | 0.83       | 12                 | 0.007      | -44           | 0.889      | 180           |
| 1050       | 0.921      | 173                | 0.77       | 10                 | 0.007      | -47           | 0.898      | 179           |
| 1100       | 0.932      | 172                | 0.72       | 8                  | 0.006      | -11           | 0.902      | 179           |
| 1150       | 0.933      | 172                | 0.67       | 6                  | 0.005      | -35           | 0.895      | 178           |
| 1200       | 0.930      | 171                | 0.63       | 4                  | 0.004      | -16           | 0.901      | 177           |
| 1250       | 0.937      | 170                | 0.59       | 1                  | 0.004      | -14           | 0.897      | 176           |
| 1300       | 0.937      | 169                | 0.55       | -1                 | 0.004      | 4             | 0.916      | 176           |
| 1350       | 0.936      | 168                | 0.52       | -3                 | 0.003      | 1             | 0.909      | 175           |
| 1400       | 0.937      | 168                | 0.49       | -4                 | 0.004      | 39            | 0.917      | 174           |
| 1450       | 0.934      | 167                | 0.45       | -6                 | 0.004      | 60            | 0.910      | 173           |
| 1500       | 0.938      | 166                | 0.43       | -7                 | 0.002      | 73            | 0.916      | 172           |

Table 12. S-parameter for PD55003-E ( $V_{DS} = 12.5$  V,  $I_{DS} = 1.5$  A)

| Freq (MHz) | $ S_{11} $ | $S_{11}\angle\Phi$ | $ S_{21} $ | $S_{21}\angle\Phi$ | $ S_{12} $ | $S_{12} - DF$ | $ S_{22} $ | $S_{22} - DF$ |
|------------|------------|--------------------|------------|--------------------|------------|---------------|------------|---------------|
| 50         | 0.789      | -140               | 26.35      | 100                | 0.025      | 15            | 0.666      | -141          |
| 100        | 0.800      | -157               | 13.35      | 87                 | 0.025      | -1            | 0.675      | -157          |
| 150        | 0.825      | -164               | 8.88       | 80                 | 0.024      | -6            | 0.667      | -162          |
| 200        | 0.836      | -168               | 6.59       | 74                 | 0.023      | -13           | 0.678      | -164          |
| 250        | 0.842      | -171               | 5.22       | 68                 | 0.024      | -16           | 0.678      | -165          |
| 300        | 0.851      | -172               | 4.26       | 62                 | 0.022      | -18           | 0.713      | -168          |
| 350        | 0.856      | -174               | 3.56       | 57                 | 0.021      | -25           | 0.738      | -168          |
| 400        | 0.864      | -175               | 3.02       | 52                 | 0.021      | -28           | 0.754      | -168          |
| 450        | 0.874      | -176               | 2.60       | 48                 | 0.019      | -32           | 0.770      | -168          |
| 500        | 0.882      | -177               | 2.25       | 44                 | 0.017      | -32           | 0.782      | -169          |
| 550        | 0.888      | -178               | 1.98       | 40                 | 0.016      | -33           | 0.796      | -171          |
| 600        | 0.898      | -179               | 1.76       | 36                 | 0.016      | -37           | 0.806      | -172          |
| 650        | 0.901      | -180               | 1.58       | 33                 | 0.013      | -34           | 0.825      | -173          |
| 700        | 0.909      | 179                | 1.42       | 30                 | 0.013      | -42           | 0.843      | -174          |
| 750        | 0.910      | 178                | 1.29       | 27                 | 0.011      | -36           | 0.852      | -175          |
| 800        | 0.915      | 177                | 1.18       | 24                 | 0.012      | -36           | 0.861      | -176          |
| 850        | 0.915      | 177                | 1.08       | 21                 | 0.010      | -26           | 0.863      | -176          |
| 900        | 0.922      | 176                | 0.99       | 19                 | 0.009      | -28           | 0.873      | -178          |
| 950        | 0.926      | 175                | 0.92       | 16                 | 0.008      | -39           | 0.880      | -179          |
| 1000       | 0.925      | 174                | 0.85       | 13                 | 0.007      | -39           | 0.882      | 180           |
| 1050       | 0.927      | 173                | 0.79       | 11                 | 0.006      | -27           | 0.892      | 179           |
| 1100       | 0.928      | 172                | 0.74       | 9                  | 0.005      | -35           | 0.891      | 178           |
| 1150       | 0.932      | 171                | 0.68       | 6                  | 0.006      | -11           | 0.899      | 178           |
| 1200       | 0.929      | 170                | 0.64       | 4                  | 0.005      | -20           | 0.896      | 177           |
| 1250       | 0.933      | 170                | 0.60       | 1                  | 0.004      | 8             | 0.889      | 176           |
| 1300       | 0.935      | 169                | 0.57       | 0                  | 0.005      | 15            | 0.907      | 175           |
| 1350       | 0.933      | 168                | 0.53       | -3                 | 0.004      | 25            | 0.904      | 174           |
| 1400       | 0.936      | 167                | 0.50       | -4                 | 0.003      | 53            | 0.911      | 174           |
| 1450       | 0.934      | 166                | 0.49       | -6                 | 0.004      | 53            | 0.909      | 173           |
| 1500       | 0.936      | 165                | 0.44       | -7                 | 0.004      | 64            | 0.914      | 172           |

Table 13. S-parameter for PD55003S-E ( $V_{DS} = 12.5$  V,  $I_{DS} = 0.15$  A)

| Freq (MHz) | S <sub>11</sub> | S <sub>11</sub> ∠Φ | S <sub>21</sub> | S <sub>21</sub> ∠Φ | S <sub>12</sub> | S <sub>12</sub> - DF | S <sub>22</sub> | S <sub>22</sub> - DF |
|------------|-----------------|--------------------|-----------------|--------------------|-----------------|----------------------|-----------------|----------------------|
| 50         | 0.790           | -120               | 22              | 107                | 0.038           | 17                   | 0.682           | -114                 |
| 100        | 0.773           | -145               | 11              | 89                 | 0.039           | -2                   | 0.647           | -138                 |
| 150        | 0.791           | -154               | 7               | 78                 | 0.039           | -9                   | 0.640           | -147                 |
| 200        | 0.807           | -159               | 5               | 70                 | 0.037           | -19                  | 0.671           | -151                 |
| 250        | 0.820           | -162               | 4               | 63                 | 0.036           | -23                  | 0.691           | -154                 |
| 300        | 0.836           | -164               | 3               | 56                 | 0.033           | -29                  | 0.728           | -156                 |
| 350        | 0.850           | -166               | 3               | 50                 | 0.032           | -33                  | 0.751           | -158                 |
| 400        | 0.867           | -167               | 2               | 45                 | 0.030           | -36                  | 0.782           | -160                 |
| 450        | 0.880           | -169               | 2               | 40                 | 0.027           | -43                  | 0.808           | -161                 |
| 500        | 0.890           | -170               | 2               | 36                 | 0.024           | -43                  | 0.835           | -163                 |
| 550        | 0.902           | -171               | 1               | 33                 | 0.023           | -50                  | 0.845           | -165                 |
| 600        | 0.911           | -172               | 1               | 29                 | 0.022           | -51                  | 0.864           | -166                 |
| 650        | 0.919           | -173               | 1               | 26                 | 0.020           | -55                  | 0.872           | -167                 |
| 700        | 0.923           | -174               | 1               | 23                 | 0.018           | -52                  | 0.884           | -169                 |
| 750        | 0.924           | -176               | 1               | 20                 | 0.016           | -55                  | 0.887           | -170                 |
| 800        | 0.933           | -177               | 1               | 18                 | 0.015           | -55                  | 0.895           | -172                 |
| 850        | 0.936           | -177               | 1               | 15                 | 0.015           | -56                  | 0.912           | -173                 |
| 900        | 0.940           | -178               | 1               | 13                 | 0.012           | -59                  | 0.916           | -174                 |
| 950        | 0.943           | -179               | 1               | 11                 | 0.011           | -53                  | 0.926           | -176                 |
| 1000       | 0.944           | -180               | 1               | 8                  | 0.008           | -60                  | 0.943           | -177                 |
| 1050       | 0.949           | 180                | 1               | 7                  | 0.007           | -64                  | 0.935           | -177                 |
| 1100       | 0.948           | 179                | 0               | 4                  | 0.007           | -44                  | 0.944           | -178                 |
| 1150       | 0.950           | 178                | 0               | 3                  | 0.006           | -44                  | 0.939           | -179                 |
| 1200       | 0.950           | 177                | 0               | -1                 | 0.005           | -50                  | 0.942           | -180                 |
| 1250       | 0.955           | 177                | 0               | -2                 | 0.004           | -42                  | 0.941           | 179                  |
| 1300       | 0.951           | 176                | 0               | -4                 | 0.004           | -41                  | 0.933           | 178                  |
| 1350       | 0.953           | 175                | 0               | -5                 | 0.004           | -50                  | 0.933           | 177                  |
| 1400       | 0.953           | 175                | 0               | -7                 | 0.002           | -41                  | 0.947           | 176                  |
| 1450       | 0.952           | 173                | 0               | -9                 | 0.002           | -13                  | 0.952           | 175                  |
| 1500       | 0.949           | 173                | 0               | -10                | 0.000           | -3                   | 0.958           | 174                  |

Table 14. S-parameter for PD55003S-E ( $V_{DS} = 12.5$  V,  $I_{DS} = 0.8$  A)

| Freq (MHz) | S <sub>11</sub> | S <sub>11</sub> ∠Φ | S <sub>21</sub> | S <sub>21</sub> ∠Φ | S <sub>12</sub> | S <sub>12</sub> - DF | S <sub>22</sub> | S <sub>22</sub> - DF |
|------------|-----------------|--------------------|-----------------|--------------------|-----------------|----------------------|-----------------|----------------------|
| 50         | 0.807           | -137               | 26.18           | 102                | 0.025           | 12                   | 0.682           | -140                 |
| 100        | 0.809           | -156               | 13.41           | 88                 | 0.026           | 0                    | 0.683           | -157                 |
| 150        | 0.827           | -163               | 8.92            | 81                 | 0.025           | -6                   | 0.677           | -162                 |
| 200        | 0.838           | -167               | 6.64            | 75                 | 0.024           | -12                  | 0.698           | -165                 |
| 250        | 0.842           | -169               | 5.24            | 69                 | 0.026           | -13                  | 0.704           | -166                 |
| 300        | 0.849           | -171               | 4.28            | 64                 | 0.022           | -19                  | 0.720           | -167                 |
| 350        | 0.856           | -172               | 3.57            | 59                 | 0.023           | -21                  | 0.736           | -167                 |
| 400        | 0.866           | -173               | 3.03            | 54                 | 0.021           | -28                  | 0.758           | -168                 |
| 450        | 0.873           | -174               | 2.61            | 50                 | 0.020           | -30                  | 0.773           | -168                 |
| 500        | 0.881           | -174               | 2.26            | 46                 | 0.056           | -27                  | 0.797           | -169                 |
| 550        | 0.891           | -175               | 1.99            | 42                 | 0.018           | -36                  | 0.806           | -170                 |
| 600        | 0.896           | -176               | 1.76            | 39                 | 0.017           | -35                  | 0.825           | -171                 |
| 650        | 0.902           | -176               | 1.58            | 36                 | 0.016           | -38                  | 0.831           | -171                 |
| 700        | 0.908           | -177               | 1.42            | 33                 | 0.015           | -39                  | 0.834           | -172                 |
| 750        | 0.910           | -178               | 1.29            | 30                 | 0.014           | -40                  | 0.845           | -174                 |
| 800        | 0.916           | -179               | 1.18            | 27                 | 0.012           | -43                  | 0.859           | -174                 |
| 850        | 0.922           | -180               | 1.08            | 25                 | 0.011           | -40                  | 0.864           | -175                 |
| 900        | 0.926           | 180                | 1.00            | 22                 | 0.009           | -44                  | 0.878           | -176                 |
| 950        | 0.927           | 179                | 0.93            | 19                 | 0.010           | -43                  | 0.892           | -178                 |
| 1000       | 0.929           | 178                | 0.85            | 17                 | 0.007           | -34                  | 0.905           | -178                 |
| 1050       | 0.937           | 178                | 0.80            | 15                 | 0.007           | -30                  | 0.901           | -179                 |
| 1100       | 0.934           | 177                | 0.75            | 12                 | 0.006           | -29                  | 0.910           | -179                 |
| 1150       | 0.934           | 177                | 0.70            | 10                 | 0.006           | -29                  | 0.914           | -180                 |
| 1200       | 0.937           | 176                | 0.65            | 7                  | 0.005           | -23                  | 0.912           | 180                  |
| 1250       | 0.941           | 175                | 0.62            | 5                  | 0.005           | -25                  | 0.912           | 179                  |
| 1300       | 0.938           | 175                | 0.57            | 3                  | 0.005           | -3                   | 0.909           | 177                  |
| 1350       | 0.941           | 174                | 0.54            | 1                  | 0.004           | 3                    | 0.906           | 176                  |
| 1400       | 0.941           | 174                | 0.51            | -1                 | 0.004           | 18                   | 0.918           | 176                  |
| 1450       | 0.939           | 173                | 0.48            | -2                 | 0.003           | 21                   | 0.925           | 174                  |
| 1500       | 0.939           | 172                | 0.45            | -3                 | 0.002           | 42                   | 0.931           | 173                  |

Table 15. S-parameter for PD55003S-E ( $V_{DS} = 12.5$  V,  $I_{DS} = 1.5$  A)

| Freq (MHz) | S <sub>11</sub> | S <sub>11</sub> ∠Φ | S <sub>21</sub> | S <sub>21</sub> ∠Φ | S <sub>12</sub> | S <sub>12</sub> - DF | S <sub>22</sub> | S <sub>22</sub> - DF |
|------------|-----------------|--------------------|-----------------|--------------------|-----------------|----------------------|-----------------|----------------------|
| 50         | 0.816           | -140               | 26.05           | 101                | 0.024           | 11                   | 0.684           | -144                 |
| 100        | 0.817           | -157               | 13.34           | 88                 | 0.025           | -2                   | 0.690           | -159                 |
| 150        | 0.839           | -164               | 8.89            | 82                 | 0.024           | -3                   | 0.685           | -164                 |
| 200        | 0.847           | -168               | 6.62            | 76                 | 0.024           | -10                  | 0.701           | -166                 |
| 250        | 0.850           | -170               | 5.25            | 70                 | 0.023           | -14                  | 0.707           | -168                 |
| 300        | 0.655           | -171               | 4.29            | 65                 | 0.023           | -17                  | 0.726           | -168                 |
| 350        | 0.861           | -173               | 3.59            | 60                 | 0.021           | -21                  | 0.735           | -169                 |
| 400        | 0.869           | -174               | 3.06            | 55                 | 0.020           | -24                  | 0.761           | -169                 |
| 450        | 0.877           | -174               | 2.64            | 51                 | 0.019           | -27                  | 0.769           | -170                 |
| 500        | 0.884           | -175               | 2.30            | 47                 | 0.017           | -31                  | 0.795           | -170                 |
| 550        | 0.893           | -176               | 2.02            | 44                 | 0.017           | -26                  | 0.800           | -171                 |
| 600        | 0.898           | -177               | 1.80            | 40                 | 0.015           | -36                  | 0.819           | -172                 |
| 650        | 0.905           | -177               | 1.62            | 38                 | 0.015           | -36                  | 0.829           | -172                 |
| 700        | 0.908           | -178               | 1.46            | 34                 | 0.014           | -34                  | 0.831           | -173                 |
| 750        | 0.909           | -179               | 1.33            | 31                 | 0.012           | -35                  | 0.842           | -174                 |
| 800        | 0.914           | -179               | 1.21            | 29                 | 0.012           | -36                  | 0.852           | -175                 |
| 850        | 0.918           | -180               | 1.11            | 26                 | 0.011           | -31                  | 0.856           | -176                 |
| 900        | 0.923           | 179                | 1.03            | 23                 | 0.009           | -32                  | 0.872           | -177                 |
| 950        | 0.927           | 179                | 0.96            | 21                 | 0.009           | -34                  | 0.879           | -178                 |
| 1000       | 0.926           | 178                | 0.88            | 18                 | 0.008           | -21                  | 0.894           | -178                 |
| 1050       | 0.935           | 178                | 0.83            | 16                 | 0.007           | -20                  | 0.898           | -179                 |
| 1100       | 0.933           | 177                | 0.78            | 13                 | 0.007           | -22                  | 0.900           | -179                 |
| 1150       | 0.933           | 176                | 0.73            | 10                 | 0.006           | -15                  | 0.904           | 180                  |
| 1200       | 0.934           | 175                | 0.68            | 8                  | 0.005           | -18                  | 0.903           | 179                  |
| 1250       | 0.940           | 175                | 0.64            | 6                  | 0.004           | -16                  | 0.901           | 178                  |
| 1300       | 0.935           | 174                | 0.59            | 4                  | 0.004           | 4                    | 0.902           | 177                  |
| 1350       | 0.938           | 174                | 0.56            | 2                  | 0.005           | 5                    | 0.898           | 176                  |
| 1400       | 0.938           | 173                | 0.53            | 0                  | 0.005           | 25                   | 0.915           | 175                  |
| 1450       | 0.939           | 173                | 0.50            | -2                 | 0.004           | 14                   | 0.925           | 174                  |
| 1500       | 0.935           | 172                | 0.47            | -3                 | 0.002           | 48                   | 0.928           | 173                  |

## 9 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK<sup>®</sup> is an ST trademark.

Table 16. PowerSO-10RF formed lead (Gull Wing) mechanical data

| Dim. | mm.   |        |       | Inch  |        |        |
|------|-------|--------|-------|-------|--------|--------|
|      | Min   | Typ    | Max   | Min   | Typ    | Max    |
| A1   | 0     | 0.05   | 0.1   | 0.    | 0.0019 | 0.0038 |
| A2   | 3.4   | 3.5    | 3.6   | 0.134 | 0.137  | 0.142  |
| A3   | 1.2   | 1.3    | 1.4   | 0.046 | 0.05   | 0.054  |
| A4   | 0.15  | 0.2    | 0.25  | 0.005 | 0.007  | 0.009  |
| a    |       | 0.2    |       |       | 0.007  |        |
| b    | 5.4   | 5.53   | 5.65  | 0.212 | 0.217  | 0.221  |
| c    | 0.23  | 0.27   | 0.32  | 0.008 | 0.01   | 0.012  |
| D    | 9.4   | 9.5    | 9.6   | 0.370 | 0.374  | 0.377  |
| D1   | 7.4   | 7.5    | 7.6   | 0.290 | 0.295  | 0.298  |
| E    | 13.85 | 14.1   | 14.35 | 0.544 | 0.555  | 0.565  |
| E1   | 9.3   | 9.4    | 9.5   | 0.365 | 0.37   | 0.375  |
| E2   | 7.3   | 7.4    | 7.5   | 0.286 | 0.292  | 0.294  |
| E3   | 5.9   | 6.1    | 6.3   | 0.231 | 0.24   | 0.247  |
| F    |       | 0.5    |       |       | 0.019  |        |
| G    |       | 1.2    |       |       | 0.047  |        |
| L    | 0.8   | 1      | 1.1   | 0.030 | 0.039  | 0.042  |
| R1   |       |        | 0.25  |       |        | 0.01   |
| R2   |       | 0.8    |       |       | 0.031  |        |
| T    | 2 deg | 5 deg  | 8 deg | 2 deg | 5 deg  | 8 deg  |
| T1   |       | 6 deg  |       |       | 6 deg  |        |
| T2   |       | 10 deg |       |       | 10 deg |        |

Note: Resin protrusions not included (max value: 0.15 mm per side)

Figure 33. Package dimensions

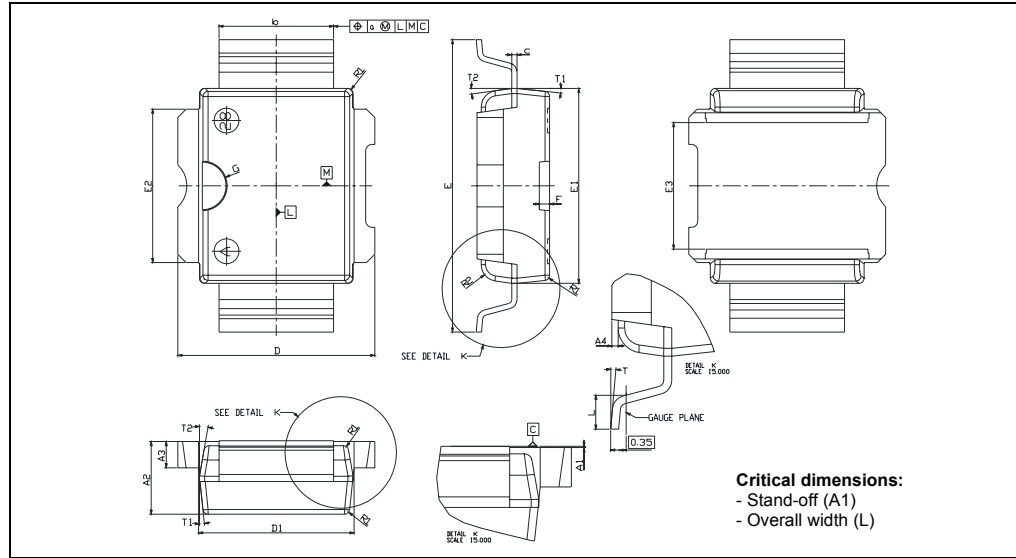


Table 17. PowerSO-10RF straight lead mechanical data

| Dim. | mm.   |        |       | Inch  |        |       |
|------|-------|--------|-------|-------|--------|-------|
|      | Min   | Typ    | Max   | Min   | Typ    | Max   |
| A1   | 1.62  | 1.67   | 1.72  | 0.064 | 0.065  | 0.068 |
| A2   | 3.4   | 3.5    | 3.6   | 0.134 | 0.137  | 0.142 |
| A3   | 1.2   | 1.3    | 1.4   | 0.046 | 0.05   | 0.054 |
| A4   | 0.15  | 0.2    | 0.25  | 0.005 | 0.007  | 0.009 |
| a    |       | 0.2    |       |       | 0.007  |       |
| b    | 5.4   | 5.53   | 5.65  | 0.212 | 0.217  | 0.221 |
| c    | 0.23  | 0.27   | 0.32  | 0.008 | 0.01   | 0.012 |
| D    | 9.4   | 9.5    | 9.6   | 0.370 | 0.374  | 0.377 |
| D1   | 7.4   | 7.5    | 7.6   | 0.290 | 0.295  | 0.298 |
| E    | 15.15 | 15.4   | 15.65 | 0.595 | 0.606  | 0.615 |
| E1   | 9.3   | 9.4    | 9.5   | 0.365 | 0.37   | 0.375 |
| E2   | 7.3   | 7.4    | 7.5   | 0.286 | 0.292  | 0.294 |
| E3   | 5.9   | 6.1    | 6.3   | 0.231 | 0.24   | 0.247 |
| F    |       | 0.5    |       |       | 0.019  |       |
| G    |       | 1.2    |       |       | 0.047  |       |
| R1   |       |        | 0.25  |       |        | 0.01  |
| R2   |       | 0.8    |       |       | 0.031  |       |
| T1   |       | 6 deg  |       |       | 6 deg  |       |
| T2   |       | 10 deg |       |       | 10 deg |       |

Note: Resin protrusions not included (max value: 0.15 mm per side)



Figure 34. Package dimensions

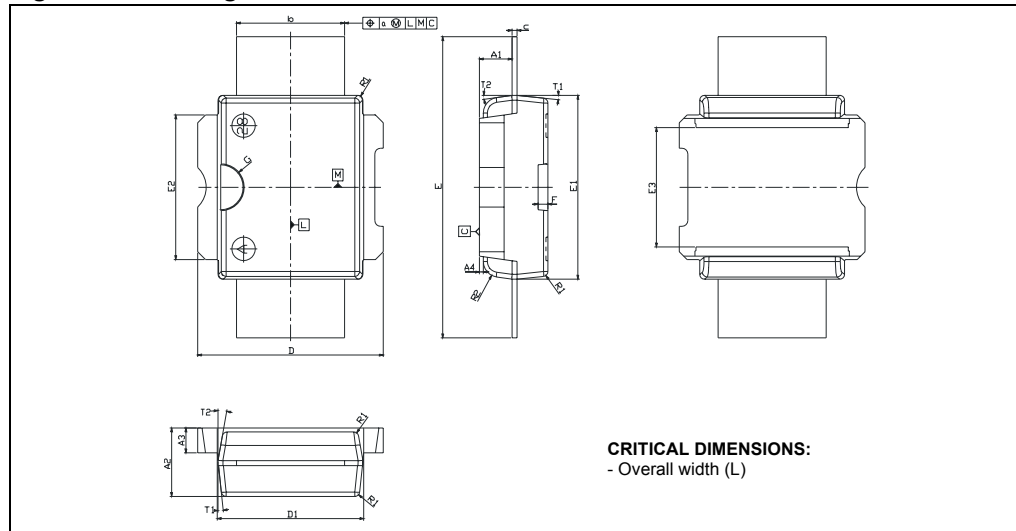


Figure 35. Tube information


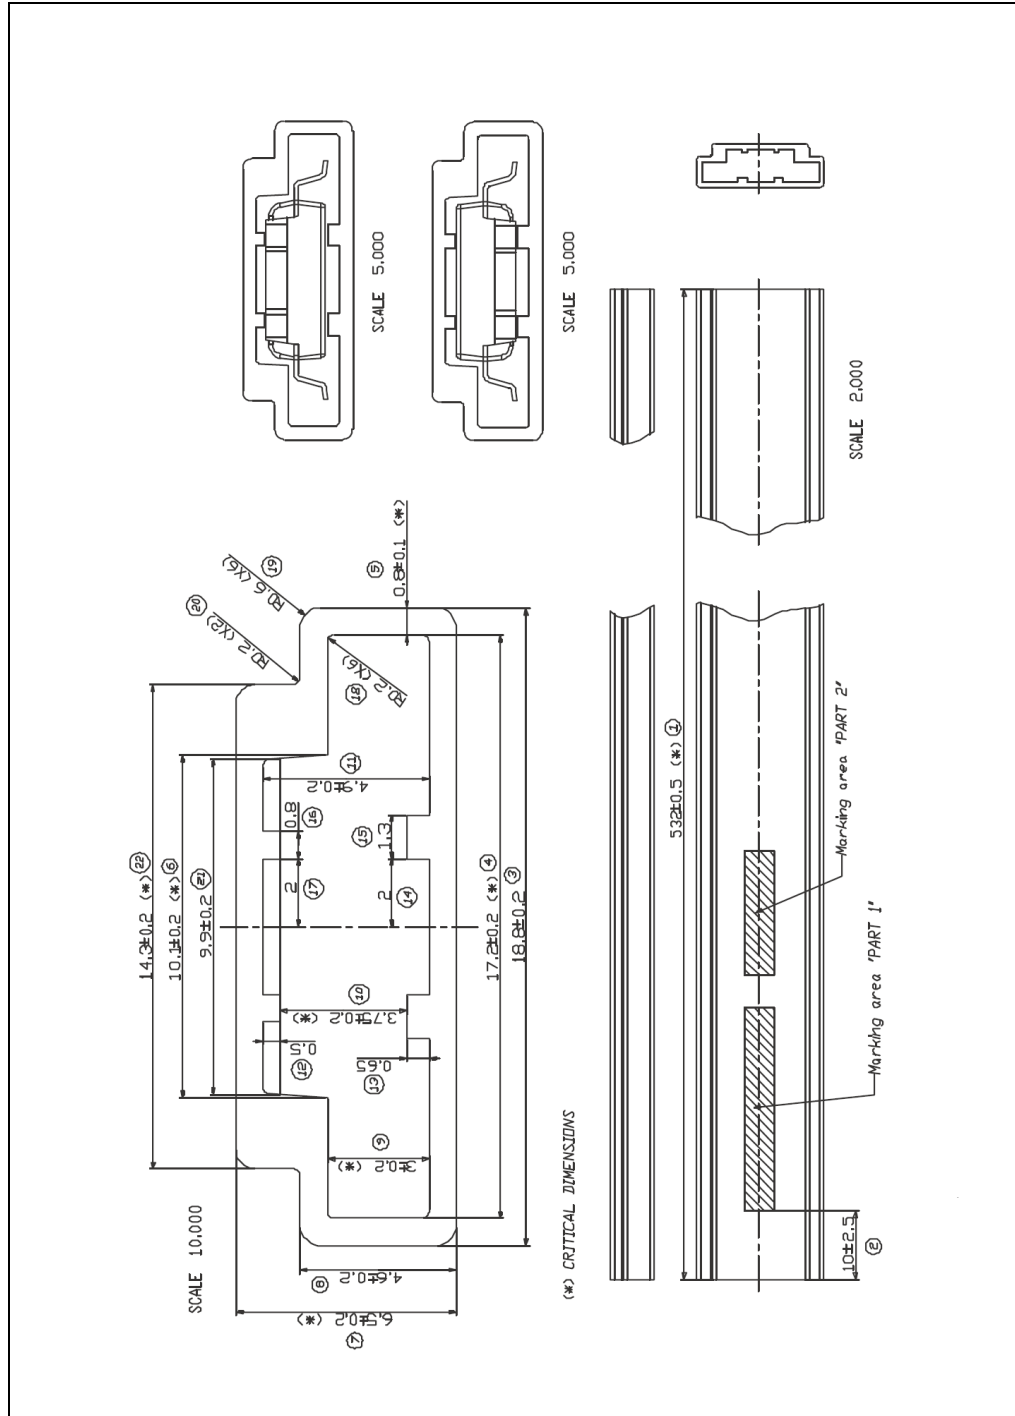


Figure 36. Reel information

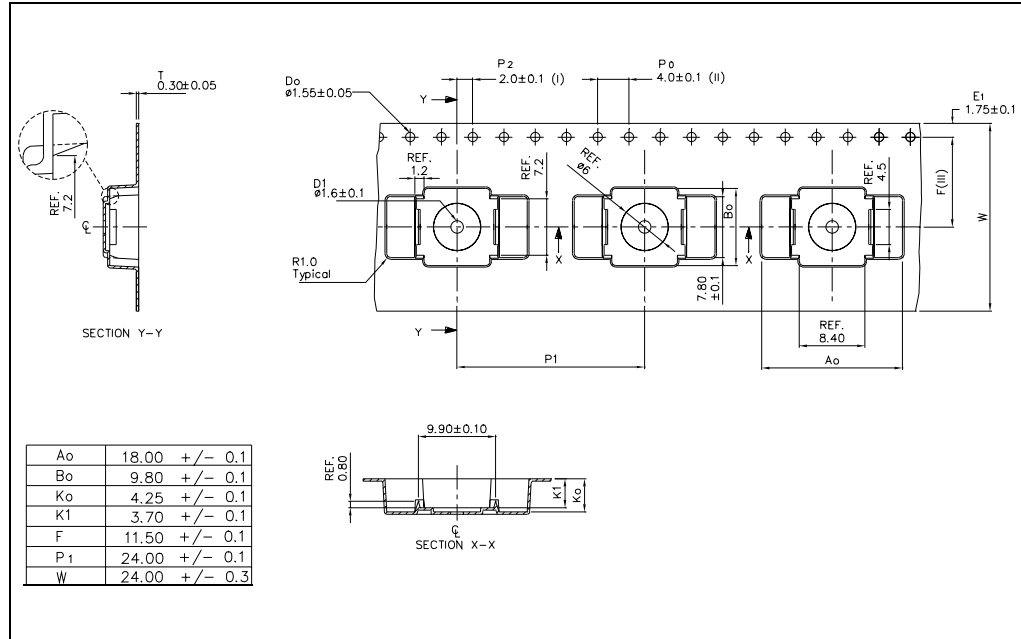

## 10 Revision history

**Table 18. Document revision history**

| Date        | Revision | Changes  |
|-------------|----------|--|
| 21-Mar-2006 | 1        | Initial release.   |
| 01-Aug-2007 | 2        | Update $R_{DS(ON)}$ in <a href="#">Table 4: Static</a> .     |
| 19-May-2010 | 3        | Added: <a href="#">Table 6: Moisture sensitivity level</a> . |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

