

## BXA30 Series

### Single and dual output

**Total Power:** 30W  
**Input Voltage:** 9 - 18VDC  
36 - 75VDC  
**# of Outputs:** Single, dual

### Special Features

- Designed to meet telecom power supply interface standard ETS300-132-2
- UL, VDE and CSA safety approvals
- VDE0878 and EN55022 conducted emissions level A
- EN61000-4-2, -3, -4, -5, -6 immunity compliant
- Fixed frequency operation at 350 kHz
- MTBF in excess of 7,005,000 hours (demonstrated)
- Basic insulation system
- Available RoHS compliant
- 2 year warranty

### Safety

VDE0805/EN60950/IEC950  
File No. 14501-3336-7006  
Licence No. 6231

UL1950 File No. E174104  
CSA C22.2 No. 950  
File No. LR41062C



Rev.12.17.07  
bxa30  
1 of 5

The BXA30 series, comprising 9 different models, has been conceived as an applications-specific range of dc-dc converters, specifically addressing telecommunications, industrial electronics, test equipment, mobile telecommunications and distributed power applications. The series offers three wide input voltage ranges, 9 Vdc to 18 Vdc and 36 Vdc to 75 Vdc, and is available in single and dual output versions. Designed to meet ETSI telecoms interface standards ETS300-132-2 and BTR2511, together with internal filtering to EN55022 level A, safety approval to EN60950 and UL1950, and isolation of 1500 Vdc, the 48 Vdc models are ideal for telecommunications applications. The 12 V models are particularly suited to industrial, mobile telecom and test equipment applications, featuring EN61000-4-2, -3, -4, -5 and -6 immunity compliant. Other features include low output ripple, overvoltage protection, continuous short circuit protection, remote enable and remote sense.



# Specifications

All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

## OUTPUT SPECIFICATIONS

Voltage adjustability	Singles	±10%
Line regulation	LL to HL (single/dual)	±0.2%/±0.4%
Load regulation	FL to NL (single/dual)	±0.2%/±0.4%
Ripple and noise (20 MHz bandwidth)	3.3 V	60 mV pk-pk
	5.0 V	50 mV pk-pk
	All others	100 mV pk-pk
	All models	20 mV rms
Temperature coefficient		±0.02%/°C
Overvoltage protection	Transient	135% Vout
Short circuit protection	Singles	Continuous
	Duals (single short)	(See BXA15/30 Design Note 100)
	Duals (dual short)	Continuous
Transient response	25% to 100% load	4.0%
Voltage accuracy		±1.5%
Load cross regulation	Dual output 30% to 100% output variation	3.0%

## INPUT SPECIFICATIONS

Input voltage range	12 Vin nominal	9-18 Vdc
	48 Vin nominal	36-75 Vdc
Reverse voltage protection (See Note 7)		Yes
Max. input rise and fall time	48 V	5 V/ms ETS300-132
Remote ON/OFF Logic compatibility		CMOS/TTL Open circuit <1 Vdc

## EMC CHARACTERISTICS

Conducted emissions	EN55022, FCC part 15 (Note 4)	Level A
	EN55022, FCC part 15 (Note 5)	Level B
	VDE0878 (Note 4) (48 V)	Level A
Radiated emissions	EN55022, FCC part 15	Level A
ESD air	EN61000-4-2, level 3	Perf. criteria 2
ESD contact	EN61000-4-2, level 4	Perf. criteria 2
Surge	EN61000-4-5, level 3	Perf. criteria 2
Fast transients	EN61000-4-4, level 3	Perf. criteria 2
Radiated immunity	EN61000-4-3, level 3	Perf. criteria 2
Conducted immunity	EN61000-4-6, level 3	Perf. criteria 2

## GENERAL SPECIFICATIONS

Efficiency		See table
Isolation voltage	Input/output	1500 Vdc
Basic insulation	input/case, 48 V models	1500 Vdc
Switching frequency	Fixed	350 kHz
Approvals and standards (See Note 12)		VDE0805, EN60950 IEC950, UL1950 CSA C22.2 No. 950
Case material		Aluminum substrate with plastic case
Material flammability		UL94V-0
Weight		120 g (4.24 oz)
MTBF (See Note 9)	Demonstrated @ 25 °C	7,005,000 hours
<b>ENVIRONMENTAL SPECIFICATIONS</b>		
Thermal performance	Baseplate operating temperature, (See Notes 6, 8)	-25 °C to +100 °C
	Non-operating	-55 °C to +100 °C
Thermal impedance	Free air convection, baseplate to air	6.5 °C/W
	With heatsink (See Note 8)	5.2 °C/W


## Ordering Information

INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MAX.)	INPUT CURRENT <sup>(1)</sup>	TYPICAL EFFICIENCY	REGULATION		MODEL NUMBER <sup>(4,6,14,15)</sup>
					LINE <sup>(2)</sup>	LOAD <sup>(3)</sup>	
9-18 Vdc	5.0 V	5.0 A	100 mA	80%	±0.2%	±0.2%	BXA30-12S05J
36-75 Vdc	3.3 V	6.0 A	30 mA	75%	±0.2%	±0.2%	BXA30-48S3V3J
36-75 Vdc	3.3 V	8.0 A	30 mA	81%	±0.2%	±0.2%	BXA30-48S3V3/8J <sup>(11)</sup>
36-75 Vdc	5.0 V	5.0 A	30 mA	80%	±0.4%	±1.0%	BXA30-48S05J
36-75 Vdc	12.0 V	2.5 A	30 mA	85%	±0.2%	±0.2%	BXA30-48S12J
36-75 Vdc	15.0 V	2.0 A	30 mA	87%	±0.2%	±0.2%	BXA30-48S15J
36-75 Vdc	±5.0 V	±2.5 A	30 mA	80%	±0.4%	±0.4%	BXA30-48D05J
36-75 Vdc	±12.0 V	±1.25 A	30 mA	84%	±0.4%	±0.4%	BXA30-48D12J
36-75 Vdc	±15.0 V	±1.0 A	30 mA	86%	±0.4%	±0.4%	BXA30-48D15J

### Notes

- 1 Nominal, at no load.
- 2 Low line to high line.
- 3 Full load to no-load. For duals, the value stated is for balanced loads.
- 4 An optional internal filter is available, which will meet VDE0871 level A, VDE0878 level A and EN55022 level A. Add the suffix '-F' to the model number, e.g. **BXA30-48S12-FJ**. See BXA15 and BXA30 Design Note 100.
- 5 For conducted noise operation of the BXA30 to VDE0871, VDE0878 and EN55022 level B, see BXA15 and BXA30 Design Note 100.
- 6 For extended operating temperature, include the heatsink option, '-1' in the model number. Max. heatsink height is 12.5 mm, e.g. **BXA30-48S15-1J**
- 7 Reverse voltage protection can be implemented by putting a slow blow fuse on the negative input rail. Rate the fuse for 48 Vdc at 1.5 A and 12 Vdc at 6 A.
- 8 The maximum operating ambient temperature, without derating depends on internal power dissipation and hence efficiency and cooling method. BXA15 and BXA30 Design Note 100 provides detailed thermal calculations and design-in details.
- 9 Test results to-date are 1,590,000 hours @ 46 °C. The MTBF figure shown includes a calculated acceleration factor of 4.1 based on an activation energy of -0.55 eV.
- 10 Visit the Artesyn website to download a copy of Design Note 100.
- 11 This model has the same electrical pin-out and pin pitch spacings as the drawing on the following page. Dimensions are 76.2 x 76.2 x 14.2 mm, ±0.3 mm.
- 12 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 13 If remote sense is not used, connect +sense to +vout and -sense to -vout.
- 14 The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 15 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or go to [www.powerconversion.com](http://www.powerconversion.com) to find a suitable alternative


# Specifications Contd.

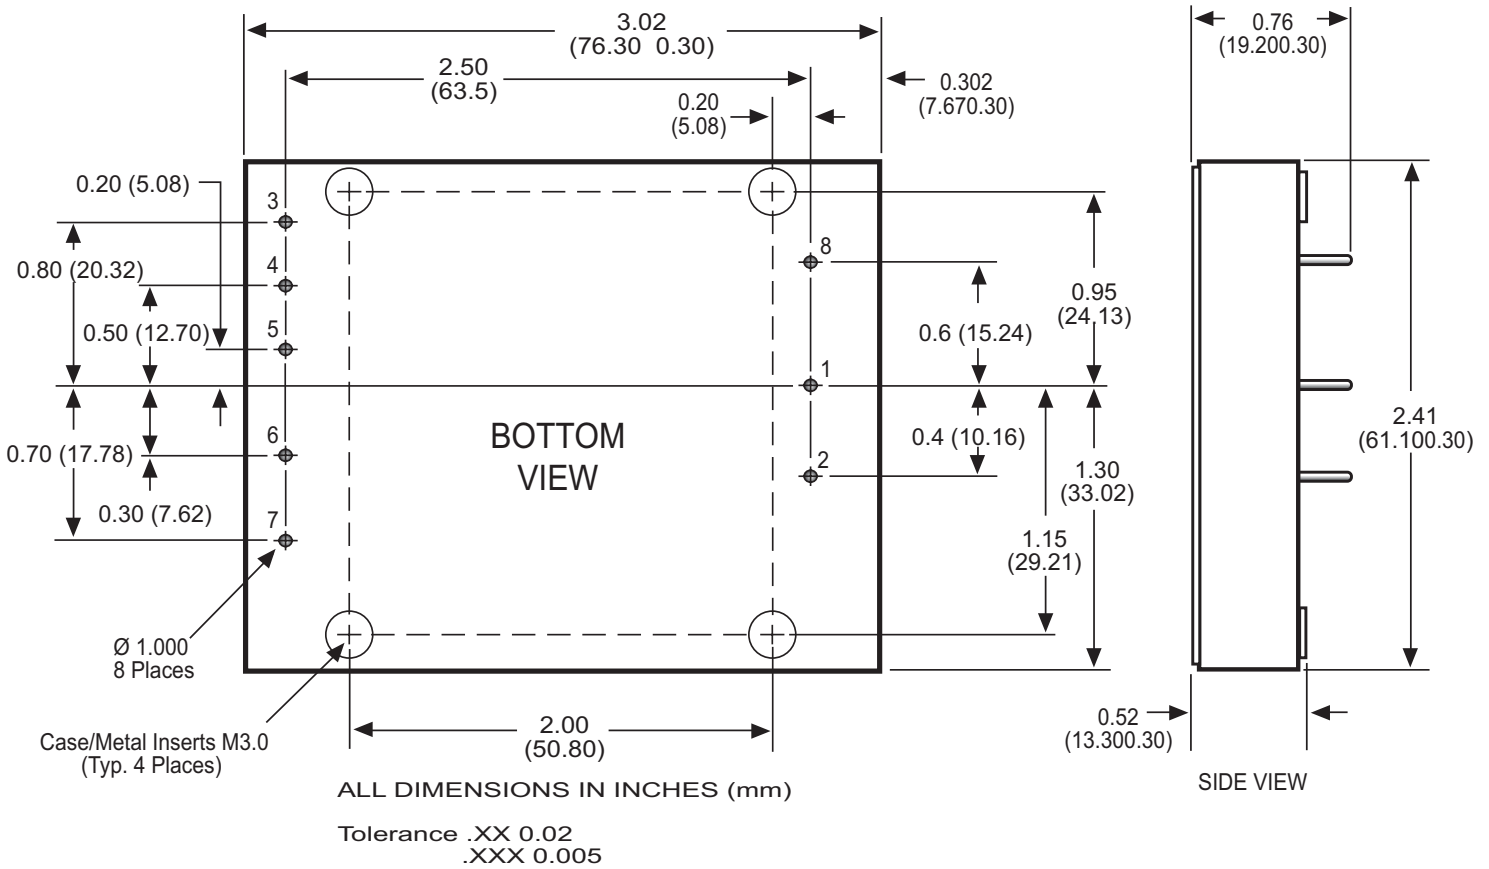

PIN CONNECTIONS		
PIN NUMBER	SINGLE OUTPUT	DUAL OUTPUT
1	+ Vin	+ Vin
2	- Vin	- Vin
3	+ Sense <sup>(13)</sup>	+ Vout
4	Trim	Common
5	- Sense	- Vout
6	+ Vout	No Pin
7	- Vout	No Pin
8	Remote ON/OFF	Remote ON/OFF

### EXTERNAL OUTPUT TRIMMING

Single output models can be externally trimmed by ±10% using either method shown.

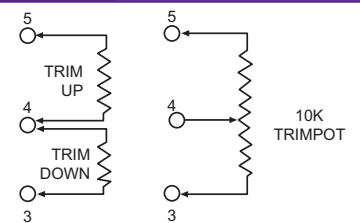

### Americas

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

### Asia (HK)

16th - 17th Floors, Lu Plaza  
2 Wing Yip Street, Kwun Tong  
Kowloon, Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

[www.powerconversion.com](http://www.powerconversion.com)

[technicalsupport@powerconversion.com](mailto:technicalsupport@powerconversion.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

### Emerson Network Power.

The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- **Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

**EmersonNetworkPower.com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2007 Emerson Electric Co.