




HC-49/U Standard Height Crystal

Quartz Crystal Resonators

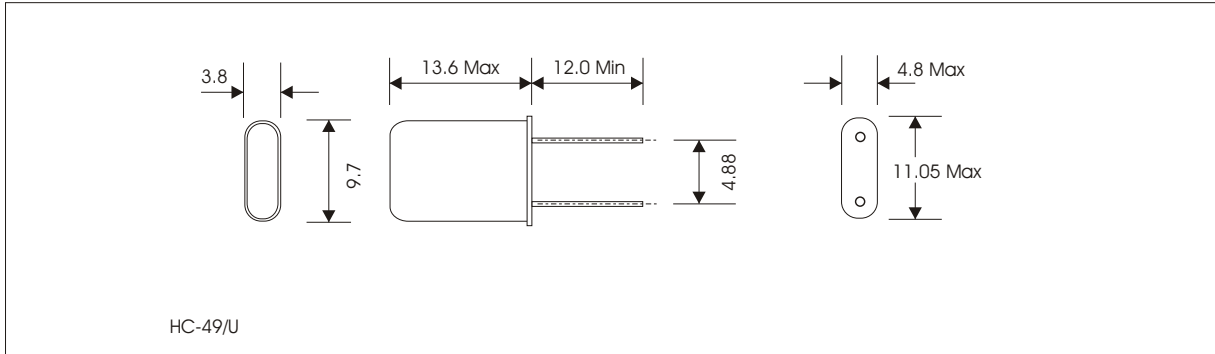

HC-49/U

FEATURES

- Wide Frequency Range
- Additional EMI Protection
- Custom Manufacturing Capability
- Fast Turnaround Options

APPLICATIONS

- Microprocessor Systems
- Datacommunications
- Consumer Electronics
- Automotive Electronics

STANDARD SPECIFICATION


Frequency Range:	300 kHz to 225 MHz
Adjustment Tolerance at 25°C:	±30PPM Max.
Frequency Stability:	±50PPM Max.
Operating Temperature Range:	-10°C to +60°C
Load Capacity:	30pF
E.S.R.:	See Table
Drive level:	500 MicroWatt
Ageing:	±5PPM 1st Year Max.

Frequency Range	E.S.R
300kHz ~ 800 kHz	3000 Ω
800kHz ~ 1.3 MHz	5000 Ω
1.8 MHz ~ 2.0 MHz	800 Ω
2.0MHz ~ 2.4 MHz	300 Ω
2.4MHz ~ 3.0 MHz	250 Ω
3.0MHz ~ 3.2 MHz	120 Ω
3.2MHz ~ 4.0 MHz	90 Ω
4.0MHz ~ 4.2 MHz	100 Ω
4.2MHz ~ 6.0 MHz	50 Ω
6.0MHz ~ 8.0 MHz	40 Ω
8.0MHz ~ 36 MHz	25 Ω
36MHz ~ 64 MHz	40 Ω
64MHz ~ 125 MHz	80 Ω
125MHz ~ 200 MHz	140 Ω

AVAILABLE OPTIONS

Frequency Range:	300 kHz ~ 225 MHz
Adjustment Tolerance	±5PPM ~ ±100PPM
Load Capacity:	Series or 9pF ~ 50pF
Shunt Capacity (C0):	4.5pF ~ 7pF (Typ.)
Dynamic Capacity (C1):	18fF ~ 20fF (Typ.)

Frequency Stability vs Operating Temperature Range

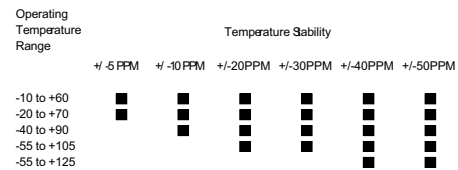

Value Added Services

In addition, AEL Crystals Ltd are able to offer our customers the following value added services:-

- Fitted Insulators
- Lead Cropping
- Radial Taping
- Earth Lead
- Lead Pre-Forming
- Bar-Coding



www.aelcrystals.co.uk quartz based frequency control components

Order Hotline +44 1293 524245

www.aelcrystals.co.uk
sales@aelcrystals.co.uk