


Switchmode Dual Fast Recovery Power Rectifiers

... Designed for use in switching power supplies, inverters and as free wheeling diodes. These state-of-the-art devices have the following features.

- * Glass Passivated chip junctions
- * Low Reverse Leakage Current
- * Fast Switching for High Efficiency
- * 150 °C Operating Junction Temperature
- * Low Forward Voltage , High Current Capability
- * Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

**FAST RECOVERY
RECTIFIERS**


**16 AMPERES
300 -- 600 VOLTS**



TO-220AB

MAXIMUM RATINGS


| Characteristic | Symbol | F16C | | | | Unit |
|--|---------------------------------|---------------|-----|-----|-----|------|
| | | 30 | 40 | 50 | 60 | |
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V_{RRM} V_{RWM} V_R | 300 | 400 | 500 | 600 | V |
| RMS Reverse Voltage | $V_{R(RMS)}$ | 210 | 280 | 350 | 420 | V |
| Average Rectifier Forward Current Per Leg Per Total Device | $I_{F(AV)}$ | 8.0 16 | | | | A |
| Peak Repetitive Forward Current (Rate V_R , Square Wave, 20kHz, $T_C=125^\circ\text{C}$) | I_{FM} | 16 | | | | A |
| Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz) | I_{FSM} | 125 | | | | A |
| Operating and Storage Junction Temperature Range | T_J, T_{stg} | - 65 to + 150 | | | | °C |









| DIM | MILLIMETERS | |
|-----|-------------|-------|
| | MIN | MAX |
| A | 14.68 | 15.32 |
| B | 9.78 | 10.42 |
| C | 6.01 | 6.52 |
| D | 13.06 | 14.62 |
| E | 3.57 | 4.07 |
| F | 2.42 | 2.66 |
| G | 1.12 | 1.36 |
| H | 0.72 | 0.96 |
| I | 4.22 | 4.98 |
| J | 1.14 | 1.36 |
| K | 2.20 | 2.97 |
| L | 0.33 | 0.55 |
| M | 2.48 | 2.98 |
| O | 3.70 | 3.90 |

ELECTRICAL CHARACTERISTICS


| Characteristic | Symbol | F16C | | | | Unit |
|--|----------|-----------|----|----|----|------|
| | | 30 | 40 | 50 | 60 | |
| Maximum Instantaneous Forward Voltage ($I_F=8.0$ Amp, $T_C = 25^\circ\text{C}$) | V_F | 1.30 | | | | V |
| Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C = 25^\circ\text{C}$) (Rated DC Voltage, $T_C = 125^\circ\text{C}$) | I_R | 10 500 | | | | uA |
| Reverse Recovery Time ($I_F = 0.5$ A, $I_R = 1.0$, $I_{rr}=0.25$ A) | T_{rr} | 250 | | | | ns |
| Typical Junction Capacitance (Reverse Voltage of 4 volts & f=1 MHz) | C_P | 70 | | | | pF |



F16C30 Thru F16C60

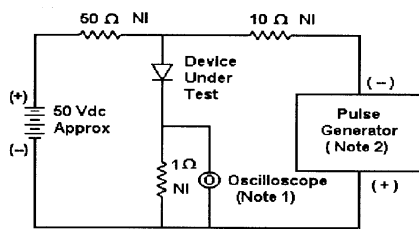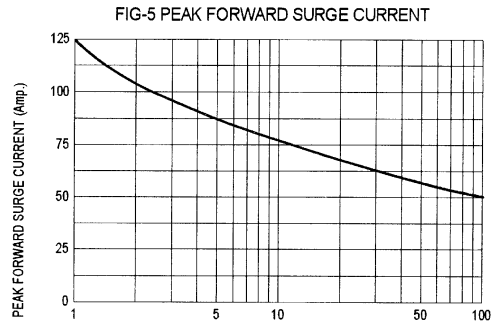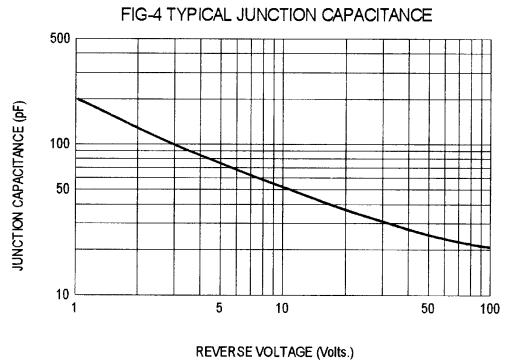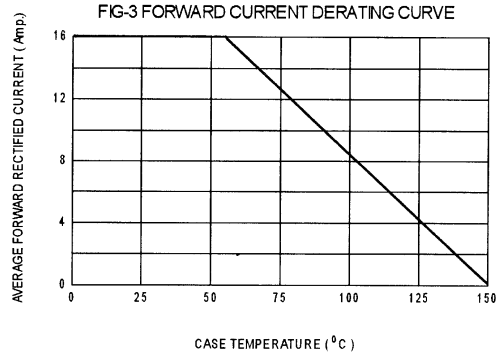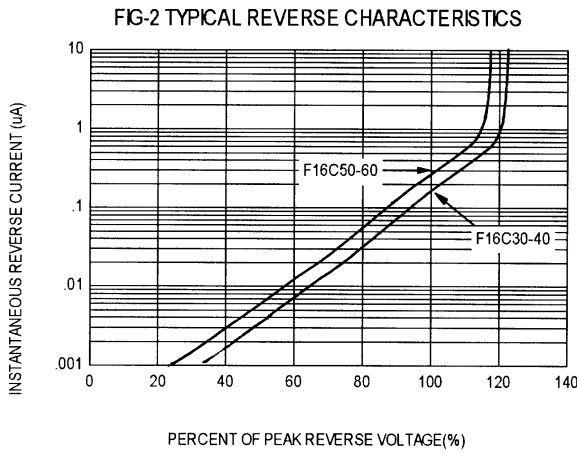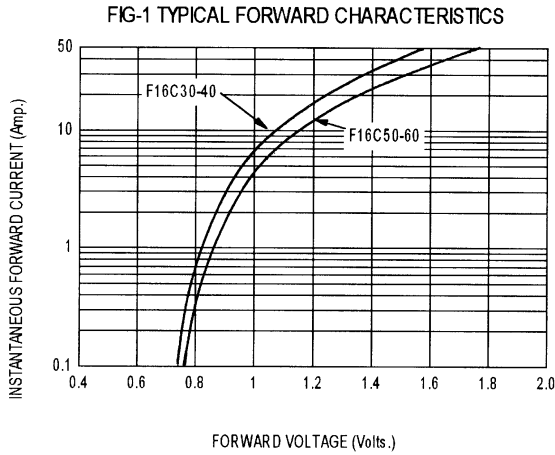

Notes:
 1. Rise Time = 7 ns max. Input Impedance = 1 M Ω , 22 pF
 2. Rise Time = 10 ns max. Input Impedance = 50 Ω

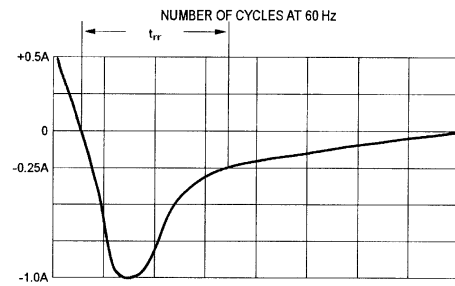

Set time base for 50/100 ns/div

Fig-6 Reverse Recovery Time Characteristic and Test Circuit Diagram