


**Preliminary data**

DC spark-over voltage <sup>1) 2)</sup>	600 ... 1000	V
Impulse spark-over voltage at 1 kV/μs    - for 99 % of measured values - typical values of distribution	< 1500 < 1300	V V
Insulation resistance at 100 V <sub>dc</sub>	> 1	GΩ
Capacitance at 1 MHz <sup>2)</sup>	< 2.5	pF
Impulse discharge current		
15 operations      8/20 μs	20	kA
1 operation      10/350 μs	7.6	kA
+ 1 operation    10/350 μs	9	kA
+ 1 operation    10/350 μs	12	kA
+ 1 operation    10/350 μs	12	kA
+ 1 operation      8/20 μs	20	kA
Max. follow-on current at 255 V <sub>RMS</sub>	100	A <sub>peak</sub>
Weight	~ 6.5	g
Operation and storage temperature	-40 ... +90	°C
Climatic category (IEC 60068-1)	40/ 90/ 21	
Marking, black	<b>EPCOS 800 YY O</b> 800    - Nominal voltage YY     - Year of production O      - Non radioactive	

<sup>1)</sup> At delivery AQL 0.65 level II, DIN ISO 2859

<sup>2)</sup> In ionized mode

Preliminary data

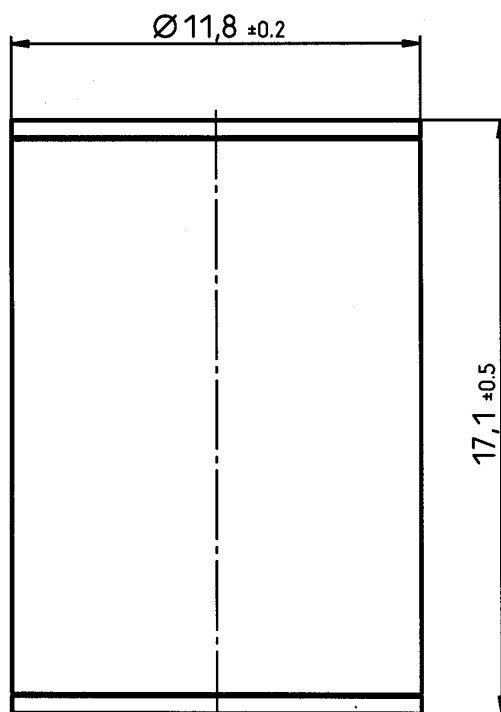

*Not to scale*

*Dimensions in mm*

*Non controlled document*

© EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.