


CDBM120 Thru CDBM1100

Reverse Voltage: 20 - 100 Volts
Forward Current: 1.0 Amp




Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Exceeds environmental standard MIL-S-19500/228
- Low leakage current

Mechanical data

- Case: Mini SMA/SOD-123 molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 0.04 gram

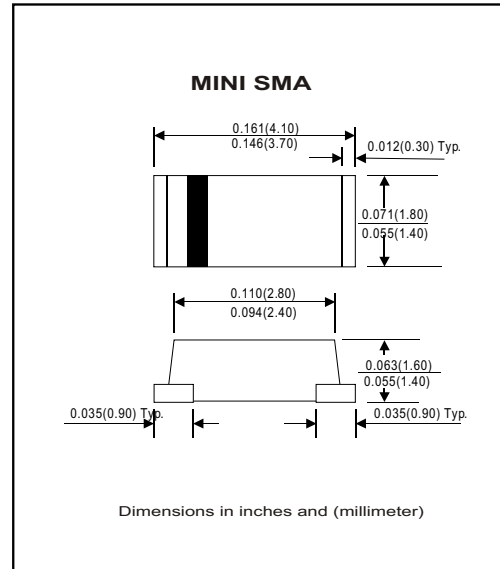

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CDBM120	CDBM140	CDBM160	CDBM180	CDBM1100	Unit
Max. Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	V
Max. DC Blocking Voltage	V_{DC}	20	40	60	80	100	V
Max. RMS Voltage	V_{RMS}	14	28	42	56	70	V
Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rate load (JEDEC method)	I_{FSM}	30					A
Max. Average Forward Current	I_o	1.0					A
Max. Instantaneous Forward Current at 1.0 A	V_F	0.50		0.70		0.85	V
Max. DC Reverse Current at Rated DC Blocking Voltage $T_a=25^{\circ}C$ $T_a=100^{\circ}C$	I_R	0.5					mA
		10			5		
Max. Thermal Resistance (Note 1)	$R_{\theta JA}$	88					$^{\circ}C/W$
	$R_{\theta JL}$	20					
Operating Junction Temperature	T_j	-55 to +125			-55 to +150		$^{\circ}C$
Storage Temperature	T_{STG}	-55 to +150					$^{\circ}C$

Note 1: Thermal resistance from junction to ambient and junction to to lead P.C.B. Mounted on 0.2 x 0.2 copper pad areas

Rating and Characteristic Curves (CDBM120 Thru CDBM1100)

Fig. 1 - Reverse Characteristics

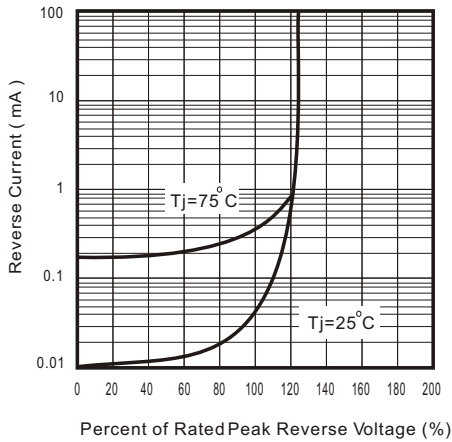


Fig.2 - Forward Characteristics

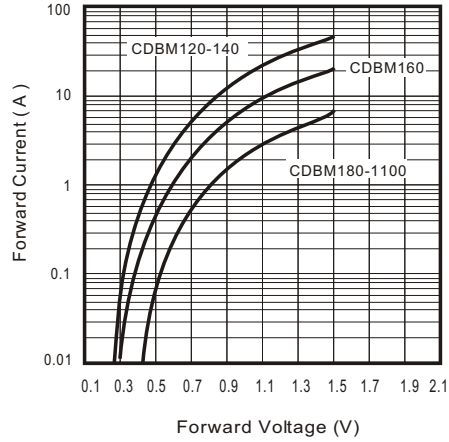


Fig. 3 - Junction Capacitance

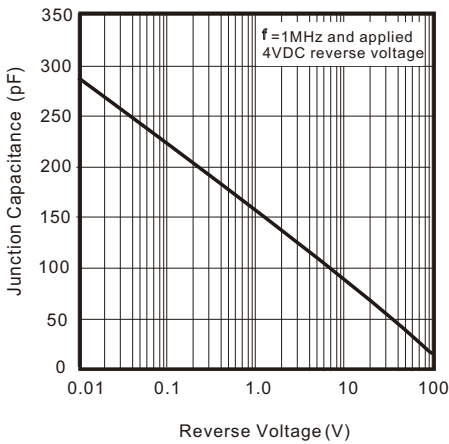


Fig. 4 - Current Derating Curve

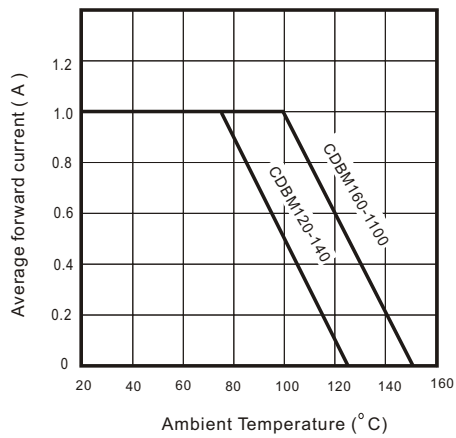


Fig. 5 - Non repetitive Forward Surge Current

