

NOTE:


- MATERIAL,
HOUSING: HIGH TEMP PLASTIC, UL94-V0, BLACK
TERMINAL: COPPER ALLOY, SQ=0.40±0.03MM
- FINISH:
TERMINAL: GOLD AT CONTACT,
G/F OVER 1um(40u") MIN NI OVER ALL
- SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1420
- THE HSG. WILL WITHSTAND EXPOSURE TO 260C
PEAK TEMP. FOR 10 SEC. IN A WAVE SOLDER APPLICATION
WITH A PCB.
- PRODUCT NUMBERING:
20021112 - 0 0 0 XX X X LF

LEAD FREE

PLATING:
1: GOLD FLASH, ALL OVER
4: 0.25um(10U") GOLD AT CONTACT
8: 0.76um(30U") GOLD AT CONTACT

PACKING
T: TUBE

PIN COUNT
06,08,10,...98,A0
(6 - 100 EVERY EVEN PIN)

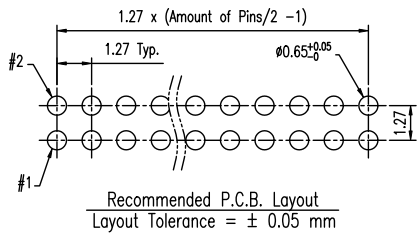

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCJ www.fciconnect.com	
ltr	ecm no	dr	date	linear	.X ± 0.38	projection	title		
A	T09-1117	S.LIN	09/15/09		.XX ± 0.25		1.27X1.27MM BTB,HEADER UNSHROUDED,RIGHT ANGLE,TH		
B	T10-0012	S.LIN	09/15/09		.XXX ± 0.10		product family 585		
				angles	0° ± 2°	MM	size dwg no		code
				dr	STERLING LIN 09/15/09	NA	20021112		TWN
				engr	STERLING LIN 09/15/09			sheet	
				chr	GARY HSIEH 09/15/09			1 of 1	
				appd	JOSEPH HSIA 09/15/09				
sheet index	revision sheet	B	1					cage code	4

ACAD PDM: Rev:B 3 STATUS: Released cage code Printed: Jan 29, 2010 4

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCJ. Copyright FCJ.

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCJ. Droits de reproduction FCJ.