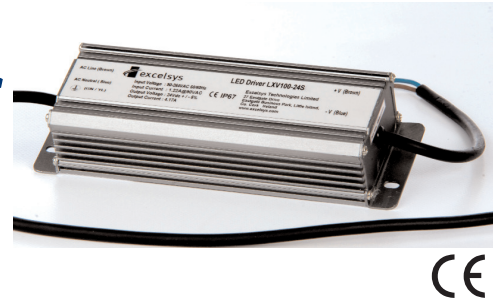


LXC200 series

LED Power
200W

LED Power Supply

Constant Current Power Supplies

LED POWER
next generation power
source

FEATURES

- High Efficiency (up to 92%)
- Constant Output Current
- Active PFC (Typical 0.99)
- IP67 Waterproof
- OVP, SCP
- -35 to 70°C deg operation
- Universal Input 90-305VAC
- UL8750 recognised
- EN61347-1, -2-13 compliant

The LXC200 series of constant current LED power supplies from Excelsys Technologies can deliver up to 200W of output power in an extremely compact package size.

The LXC200 series of constant current power supplies provides up to 8330mA of output current and 445V output voltage solutions for specific LED requirements. With industry leading efficiencies, and an extensive protection feature set, the LXC200 series provides high reliability and high performance in a compact package.

Model Number	Output Voltage	Output Current	Input Voltage	OVP Latching max	Efficiency
LXC200-0450SW	267-445V	450mA	90-305VAC	668V	92.0%
LXC200-0700SW	171-285V	700mA	90-305VAC	428V	92.0%
LXC200-1050SW	114-190V	1050mA	90-305VAC	285V	92.0%
LXC200-1400SW	85-142V	1400mA	90-305VAC	213V	92.0%
LXC200-1750SW	69-114V	1750mA	90-305VAC	171V	91.0%
LXC200-2100SW	57-95V	2100mA	90-305VAC	143V	91.0%
LXC200-2450SW	48-81V	2450mA	90-305VAC	122V	91.0%
LXC200-2800SW	42-71V	2800mA	90-305VAC	107V	91.0%
LXC200-3150SW	38-63V	3150mA	90-305VAC	95V	91.0%
LXC200-3500SW	34-57V	3500mA	90-305VAC	86V	91.0%
LXC200-4200SW	28-47V	4200mA	90-305VAC	71V	91.0%
LXC200-4900SW	24-40V	4900mA	90-305VAC	60V	91.0%
LXC200-5600SW	21-35V	5600mA	90-305VAC	53V	90.0%
LXC200-6300SW	19-32V	6300mA	90-305VAC	48V	91.0%
LXC200-8330SW	14-24V	8330mA	90-305VAC	36V	90.0%

Input Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range	Universal Input	90		305	VAC
Input Frequency Range		47		63	Hz
Input Current	100VAC in, 200W output			2.4	A
Inrush Current	230VAC in, 25°C, Cold Start			65	A
Power Factor	220VAC, 110VAC	0.96		0.99	

Output Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±1	%
Load Regulation				±3	%
Voltage Range	See table of outputs				
Output Current Range	% of Iout			±5	%
Ripple and Noise	20MHz Bandwidth. See Note 1			3.0	% pk-pk
Turn-on Delay	Measured at 220VAC and full load			2	s
Short Circuit Protection	Auto Recovery				
Over Voltage Protection	Latching. See individual models OVP levels				

General Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output See Note 2 Input to Chassis	3750 1500			VAC VAC
Efficiency	See individual models		91		%
Safety Agency Approvals	UL8750, EN61347-1, -2-13				
MTBF	Telecordia SR-33, 25°C		1,600,000		Hours
Lifetime	25°C		78,000		Hours
Weight			1500		g
Operating Temperature		-35		+70	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	10		100	%RH



Europe/Asia

Excelsys Technologies Ltd
27 Eastgate Drive
Eastgate Business Park
Little Island, Cork, Ireland
IRELAND

t: +353 21 4354716
f: +353 21 4354864
e: sales@excelsys.com

North America

Excelsys Technologies
519 Interstate 30, #309
Rockwall, TX 75087
USA

t: (972) 771 4544
f: (972) 421 1805
e: salesusa@excelsys.com

EMC			
Parameter	Standard	Level	Units
Emissions			
Conducted	EN55015	Compliant	
Radiated	EN55015	Compliant	
Harmonic Distortion	EN61000-3-2	Compliant	
Flicker and Fluctuation	EN61000-3-3	Compliant	
Immunity			
ESD	EN61000-4-2	Level 4	
Radiated RFI	EN61000-4-3	Level 3	
Fast Transients - burst	EN61000-4-4	Level 4	
Surge Immunity	EN61000-4-5	Level 4	
Conducted RFI	EN61000-4-6	Compliant	
Power Freq Magnetic Field	EN61000-4-8	Compliant	
Voltage Dips	EN61000-4-11		

Note 1. Output connected in parallel with 0.1uF ceramic capacitor and 10uF electrolytic capacitor.
 Note 2. Primary to Secondary Isolation test not to be carried out on power supply.

INPUT / OUTPUT WIRING


INPUT CABLE

SJTW 18AWG 3C
 Black (L), White(N), Green 650±20mm

OUTPUT CABLE

SJTW 18AWG 2C
 Black (-V) and Red (+V) 220±20mm

MECHANICAL SPECIFICATIONS

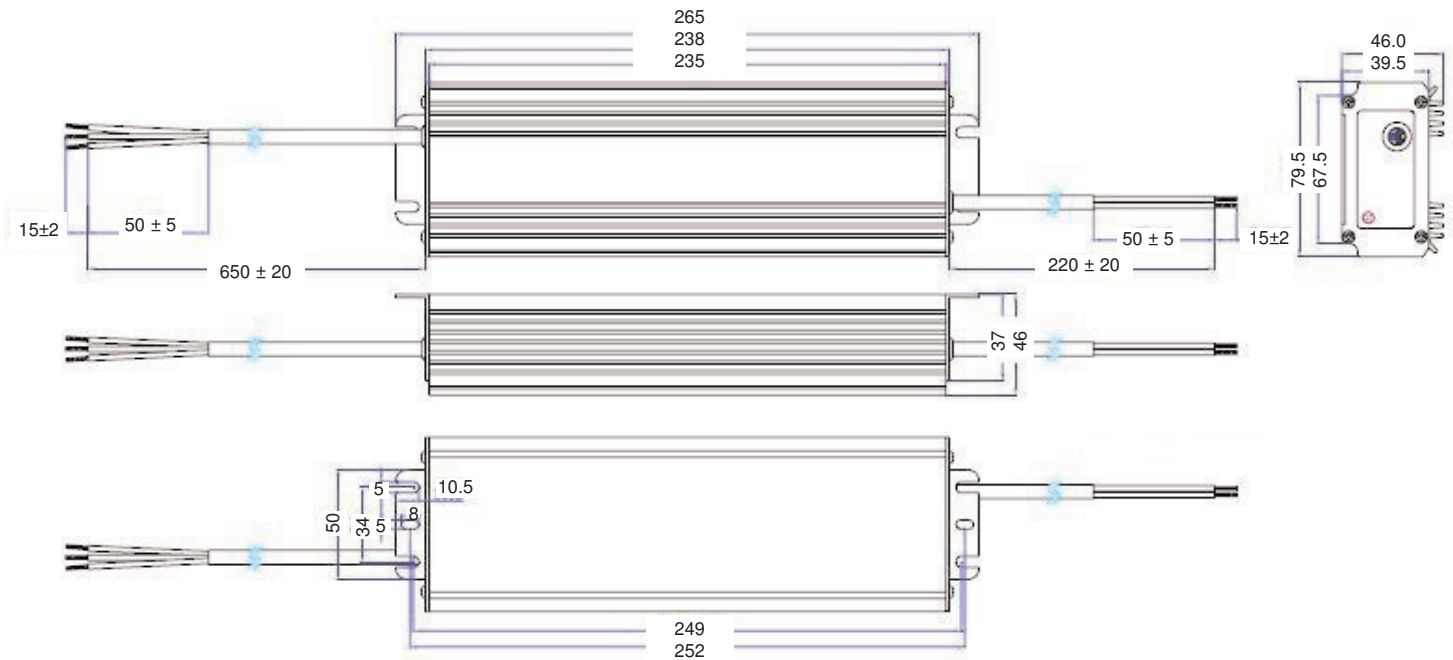

Specifications are subject to change without notice
 LXC200 Datasheet Pre Release 30 Sept 2010



Europe/Asia

Excelsys Technologies Ltd t: +353 21 4354716
 27 Eastgate Drive f: +353 21 4354864
 Eastgate Business Park e: sales@excelsys.com
 Little Island, Cork, Ireland
 IRELAND

North America

Excelsys Technologies t: (972) 771 4544
 519 Interstate 30, #309 f: (972) 421 1805
 Rockwall, TX 75087 e: salesusa@excelsys.com
 USA