


## Rail Mount Terminal Blocks

### NDN63

#### SPECIFICATIONS:


**Rating:** 65A, 600V; UL/CSA  
**Center Spacing:** .375" (9.52 mm)  
**Number Of Poles:** 3  
**Circuits Per Foot:** 30  
**Circuit Jumper:** JN3, 2 circuits  
**Wire Range:** AWG #6-18 CU  
**Screw Size:** #10-32  
**Mounting Options:** 35mm DIN rail, C-rail  
**Marking Tape:** MT12-1/2  
**Torque Rating:** 35 in-lb  
**Operating Temperature:** 105°C

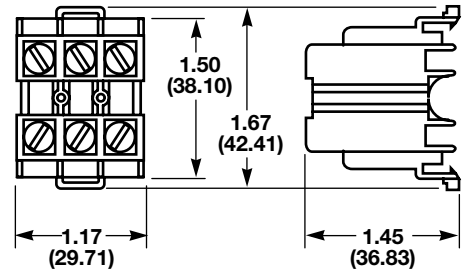

### NDN1

#### SPECIFICATIONS:

**Rating:** 90A, 600V  
**Center Spacing:** .635" (16.13 mm)  
**Number Of Poles:** 1  
**Circuits Per Foot:** 18  
**Wire Range:** AWG #2-18 CU  
**Screw Size:** #1/4-28  
**Mounting Options:** 35mm DIN rail, C-rail  
 \* Dove-tail option is available for mounting side-by-side.  
 Order part no. NDN1-A  
**Marking Tape:** MT12-1/2  
**Torque Rating:** 32 in-lb  
**Operating Temperature:** 105°C

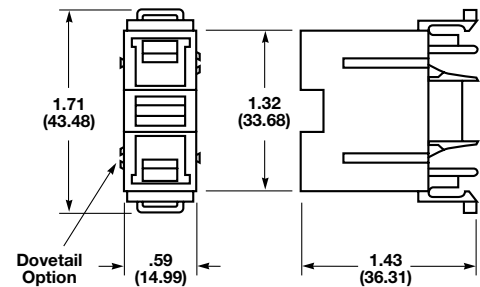

### NDN111

#### SPECIFICATIONS:

**Rating:** 90A, 600V; UL/CSA  
**Center Spacing:** .635" (16.13 mm)  
**Number Of Poles:** 3  
**Circuits Per Foot:** 18  
**Circuit Jumper:** JN1, 2 circuits  
**Wire Range:** AWG #2-18 CU  
**Screw Size:** #1/4-28  
**Mounting Options:** 35mm DIN rail, C-rail, Base Mount  
 \* Dove-tail option is available for mounting side-by-side.  
 Order part no. NDN111-A  
**Marking Tape:** MT12-1/2  
**Torque Rating:** 32 in-lb  
**Operating Temperature:** 105°C

