

PRODUCT NO
SEE TABLE

FCI CONFIDENTIAL

FCI
FCIconnect.com
This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information herein may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, without the written consent of FCI.
Copyright FCI

form A4

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302		ISO 406 ISO 1101		mm		S-ATA	
lfr	ecn no	dr	date	tolerances unless otherwise specified		mm		title	
A	S04-0027	GLL	2004-02-27			mm		S-ATA COMB RECEP	
B	S04-0078	GLL	2004-04-28			mm		VERTICAL SMT TYPE ASSY	
C	S05-0035	GLL	2005-02-07			scale 2:1			
D	S05-0359	GLL	2005-12-07	dr	GL L00	2004-02-27	FCI		dwg no
E	S06-0188	GLL	2006-05-30	enrg	GL L00	2004-02-27			sheet 1 of 2
F	S09-0141	GLL	2009-05-04	chr	GL L00	2009-09-04			A4
G	S09-0276	GLL	2009-09-04	appd	JOEY NG	2009-09-04			type
sheet	revision	G	G					CUSTOMER Drawing	
index	sheet	1	2						




PDM: Rev:G STATUS Released 10029065C1revG Printed: Apr 08, 2010

FCI CONFIDENTIAL
 This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this drawing may be reproduced, stored in a retrieval system, or used in any way or disclosed to any third party without the written consent of FCI. Copyright FCI.

PRODUCT NO	PLATING	PICK-UP CAP	PACKAGING	REMARKS	PRODUCT NO	PLATING
10029065-001LF	NOTE 3	NO	TRAY	-	10029065-401LF	NOTE 11
10029065-001CLF		YES		SEE NOTE ④	10029065-401CLF	
10029065-001C-TRLF		YES	TAPE & REEL	SEE NOTE ⑨	10029065-401C-TRLF	

NOTES:

- 1 THIS PRODUCT MEETS THE SATA SPEC REV. 10a
- 2 MATERIAL:
 - 1) HOUSING : HIGH TEMP TERMOPLASTIC, UL 94V-0
COLOR : BLACK
 - 2) TERMINAL : COPPER ALLOY
 - 3) HOLD DOWN : COPPER ALLOY
- ③ FINISH :
 - 1) TERMINAL : 30u" Au PLATING (CONTACT POINT) OVER 50u" NICKEL
 - 2) SOLDER TAIL : 50u" min Sn OVER 50u" NICKEL
 - 3) HOLD DOWN : 50u" min Sn OVER 50u" NICKEL
- ④ PART WITH PICK-UP CAP, P/N XXXXXXXX-XXXX LF
- ⑤ THE STD PACKAGING IS IN TRAY UNLESS OTHERWISE SPECIFIED.
- 6 THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- ⑦ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- ⑧ PART NUMBERS ENDING IN 'LF' MEANS FOR NOTE 7 LEAD FREE IDENTIFICATION
 - Ⓜ P/N XXXXXXXX-XXXXLF IS EQUIVALENT TO PREVIOUS P/N XXXXXXXX-XXX
 - Ⓜ P/N XXXXXXXX-XXXXCLF IS EQUIVALENT TO PREVIOUS P/N XXXXXXXX-XXXX
- ⑨ FOR TAPE & REEL PACKAGING, SUFFIX '-TR' ADDED.
P/N XXXXXXXX-XXXX-TR LF
- ⑩ A Δ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION
- ⑪ FINISH:
 - 1) TERMINAL : 15u" GXT PLATING (CONTACT POINT) OVER 50u" NICKEL
 - 2) SOLDER TAIL : 50u" min Sn OVER 50u" NICKEL
 - 3) HOLD DOWN : 50u" min Sn OVER 50u" NICKEL

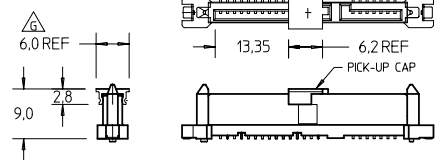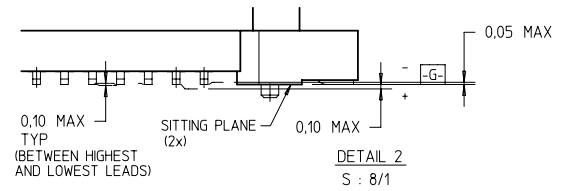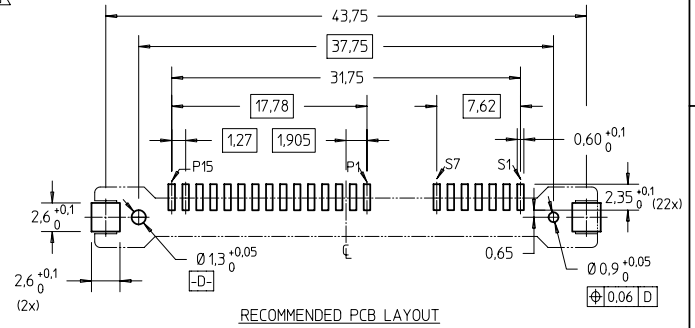

PART WITH PICK-UP CAP, SEE NOTE ④

mat'l. code	surface	tolerance	projection	product family
ISO 1302	ISO 406 ISO 1101	ISO 1101	mm	S-ATA
tr	ecn no	dr	date	title
G				S-ATA COMB RECEP VERTICAL SMT TYPE ASSY
tolerances unless otherwise specified				dwg no
angles	linear	= +0.20		10029065
± 2°		scale 2 : 1		sheet 2 of 2 size
dr	QL L00	2004-02-27		A4
engr	QL L00	2004-02-27		type
chr	QL L00	2009-09-04		CUSTOMER
appd	JOEY NG	2009-09-04		Drawing
sheet index	revision sheet	1		