

SIGN	DATE	DESCRIPTION	APPROVER
△	12/12/07		

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Insulator(housing):Thermoplastic (UL 94V-0)
- Insulator(cover):Thermoplastic (UL 94V-0)
- Metal housing: Zinc alloy . Ni plated
- Contacts:Brass
- Terminal screw: Steel Zinc plating"+/-"slot type

Electrical

- Voltage rating : 300V
- Current rating : 57A
- Wire range :
Solid wire (AWG) : 6-22
Stranded wire (AWG) : 6-22
- Torque (LB-In.) : 10.4
- Screw : M4.5
- Wire strip length : 11 ~12mm
- Withstanding voltage : 1.6KV
- Operating temperature : -40°C+115°C
- Soldering temperature : 250°C+10°C/5 Sec

RoHS Compliant

PART NUMBER:





OSTKQXX6200

- | | |
|--------------|---------------------|
| No. of Poles | COLOR |
| 02 2 Poles | 0: Black (Standard) |
| 03 3 Poles | 5: Green |
| | 6: Blue |
| 12 12 Poles | 8: Grey |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTKQ 10.16 Series solder pin size 1.6x1.2mm			
PART NO.		OSTKQXX6200		DWG NO. OSTKQXX6200.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
Marvin 2009.04.07	Marvin 2009.04.07	kind 2008.12.11	kind 2008.12.11	Tolerance	
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.XX ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: B	X* ±1*

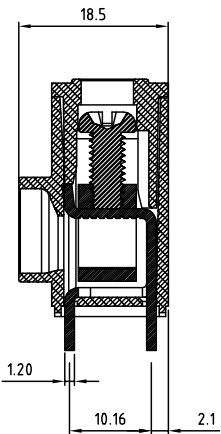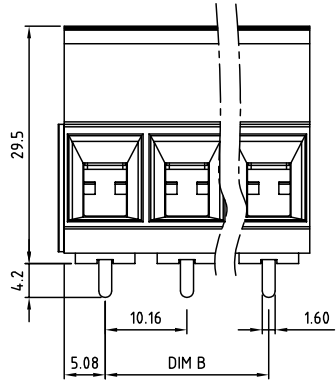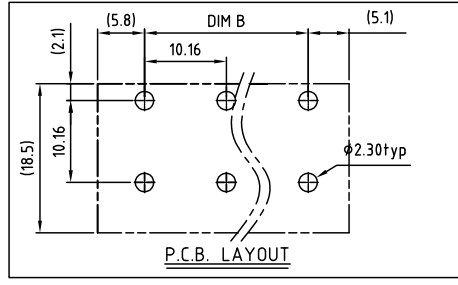

Poles	02	03	04	05	06	07	08	09	10	11	12
Dim L	20.32	30.48	40.64	50.80	60.96	71.12	81.28	91.44	101.60	111.76	121.92
Dim B	10.16	20.32	30.48	40.64	50.80	60.96	71.12	81.28	91.44	101.60	111.76
TOL	±0.25						±0.40				