



HHR-70AAA/FT Cylindrical AAA size (HR11/45)

Dimensions (with tube) (mm)

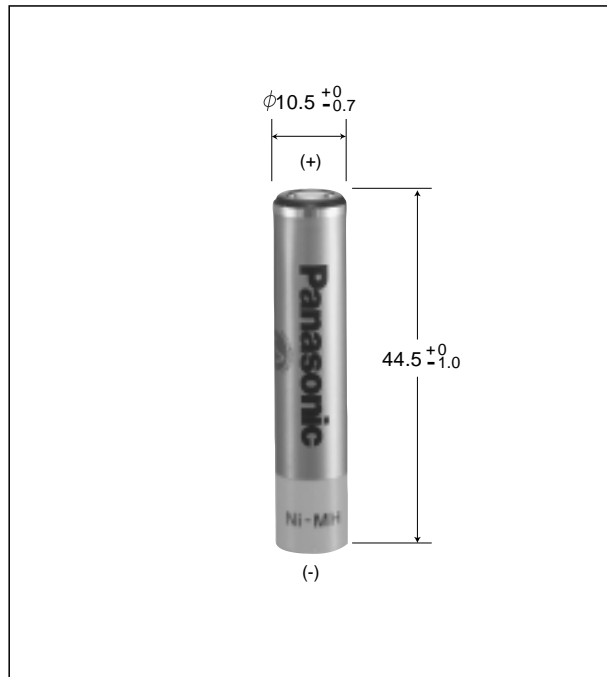

Typical charge characteristics

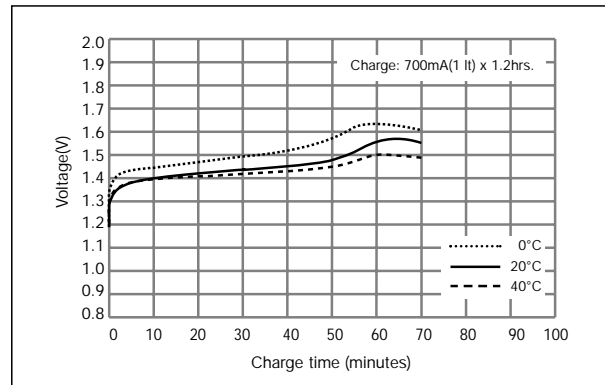

Specifications

Diameter	10.5+0 / -0.7mm
Height	44.5+0 / -1.0mm
Approximate Weight	12g

Nominal Voltage		1.2V
Discharge Capacity ^{*1}	Average ^{*2}	730mAh
	Rated (min)	700mAh
Approx. Internal impedance at 1000Hz at charged state		30mΩ
Charge	Standard	70mA x 16hrs.
	Rapid ^{*3}	700mA x 1.2hrs.
Ambient Temperature	Charge	Standard: 0°C to 45°C Rapid: 0°C to 40°C
	Discharge	-10°C to 65°C
Storage	<1 year	-20°C to 35°C
	<6 months	-20°C to 45°C
	<1 month	-20°C to 55°C

^{*1} After charging at 0.1It for 16 hours, discharging at 0.2It.
^{*2} For reference only.
^{*3} Need specially designed control system. Please contact Panasonic for details.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and design.

^{*}The data in this document are for descriptive purposes only and are not intended to make any guarantee or warranty.

Typical discharge characteristics

