

DIODE(THREE PHASES BRIDGE TYPE)

DF150BA40/80



UL:E76102(M)

Power Diode Module **DF150BA** is designed for three phase full wave rectification, which has six diodes connected in a three phase bridge configuration. The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction. Output DC current is 150Amp ($T_c=100^\circ\text{C}$) Repetitive peak reverse voltage is up to 800V.

- $T_{j\text{Max}}=150^\circ\text{C}$
- Isolated mounting base
- High reliability by unique glass passivation

(Applications)

AC, DC Motor Drive/AVR/Switching
-for three phase rectification

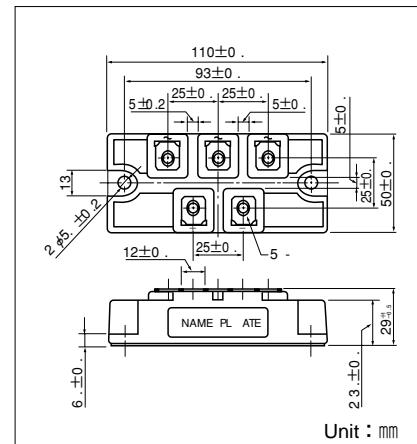

■ Maximum Ratings

($T_j=25^\circ\text{C}$, $U_n = 1$)

Symbol	Item	Ratings		Unit
		DF150BA40	DF150BA80	
V_{RRM}	Repetitive Peak Reverse Voltage	400	800	V
V_{RSM}	Non-Repetitive Peak Reverse Voltage	480	960	V

Symbol	Item	Conditions	Ratings	Unit
I_D	Output Current (D.C.)	Three Phase full wave. $T_c=100^\circ\text{C}$	150	A
I_{FSM}	Surge Forward Current	1cycle, 50/60Hz, peak value, non-repetitive	1100/1200	A
I^2t	I_t	Value for one cycle of surge current	6000	A^2s
T_j	Operating Junction Temperature		-40 t + 150	$^\circ\text{C}$
T_{stg}	Storage Temperature		-40 t + 125	$^\circ\text{C}$
V_{iso}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	2500	V
	Mounting Torque	Mounting (M5) Terminal (M5)	Recommended Value 1.5-2.5 (15-25) Recommended Value 1.5-2.5 (15-25)	2.7 (28) N·m 2.7 (28) (kgf·cm)
	Mass	Typical Value	360	g

■ Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I_{RRM}	Repetitive Peak Reverse Current, max.	$T_j=150^\circ\text{C}$ at V_{RRM}	15.0 mA	
V_{FM}	Forward Voltage Drop, max.	$T_j=25^\circ\text{C}$, $I_{FM}=150\text{A}$, Inst. measurement	1.20 V	
$R_{th(j-c)}$	Thermal Impedance, max.	Junction to case	0.14 $^\circ\text{C}/\text{W}$	

SanRex®

50 Seaview Blvd. Port Washington, NY 11050-4618 PH.(516)625-1313 FAX(516)625-8845 E-mail: semi@sanrex.com

