

TOSHIBA SEMICONDUCTOR
TECHNICAL DATA

TOSHIBA GTR MODULE
MG50H2YS1


SILICON N CHANNEL IGBT

HIGH POWER SWITCHING APPLICATIONS.
MOTOR CONTROL APPLICATIONS.


FEATURES:

- . High Input Impedance
- . High Speed : $t_f=1.0\mu s(\text{Max.})$
 $t_{rr}=0.5\mu s(\text{Max.})$
- . Low Saturation Voltage: $V_{CE(sat)}=5.0V(\text{Max.})$
- . Enhancement-Mode
- . Includes a Complete Half Bridge in one Package.
- . The Electrodes are Isolated from Case.

EQUIVALENT CIRCUIT

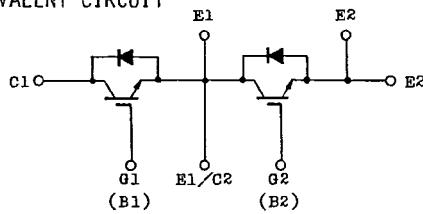

Unit in mm

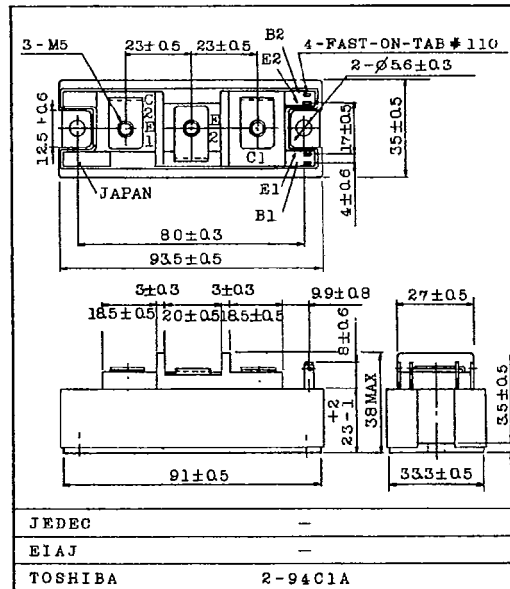

JEDEC	-
EIAJ	-
TOSHIBA	2-94C1A

Weight : 222g

MAXIMUM RATINGS (Ta=25°C)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Emitter Voltage	V_{CES}	500	V
Gate-Emitter Voltage	V_{GES}	±20	V
Collector Current	DC	I_C	50
	lms	I_{CP}	100
Forward Current	DC	I_F	50
	lms	I_{FM}	100
Collector Power Dissipation	P_C	300	W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-40~125	°C
Isolation Voltage	V_{isol}	2500 (AC 1 Minute)	V
Screw Torque (Terminal/Mounting)	-	30/30	kg·cm

EGA-MG50H2YS1-1
1986-9-1
TOSHIBA CORPORATION

TOSHIBA SEMICONDUCTOR
 TECHNICAL DATA







MG50H2YS1

ELECTRICAL CHARACTERISTICS (Ta=25°C)

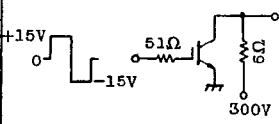CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		ICGS	VGE=±20V, VCE=0	-	-	±500	nA
Collector Cut-off Current		ICES	VCE=500V, VGE=0	-	-	1.0	mA
Collector-Emitter Breakdown Voltage		V(BR)CES	IC=10mA, VGE=0	500	-	-	V
Gate-Emitter Turn-on Voltage		VGE(th)	IC=50mA, VCE=5V	3.0	-	6.0	V
Collector-Emitter Saturation Voltage		VCE(sat)	IC=50A, VGE=15V	-	3.0	5.0	V
Input Capacitance		Cies	VCE=10V, VGE=0, f=1MHz	-	3000	-	pF
Switching Time	Rise Time	tr		-	0.5	1.0	μs
	Turn-on Time	ton		-	0.6	1.0	
	Fall Time	tf		-	0.4	1.0	
	Turn-off Time	toff		-	0.9	1.5	
Forward Voltage		VF	IF=50A, VGE=-10V	-	1.5	2.5	V
Reverse Recovery Time		trr	IF=50A, VGE=0 di/dt=100A/μs	-	0.25	0.5	μs
Thermal Resistance		Rth(j-c)	Transistor	-	-	0.41	°C/W
			Diode	-	-	0.83	





TOSHIBA SEMICONDUCTOR
TECHNICAL DATA

MG50H2YS1

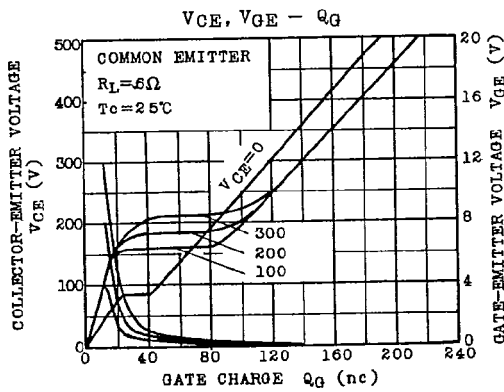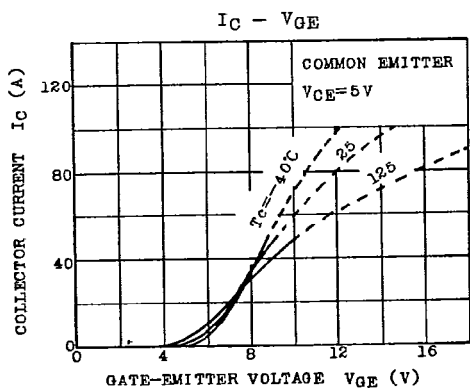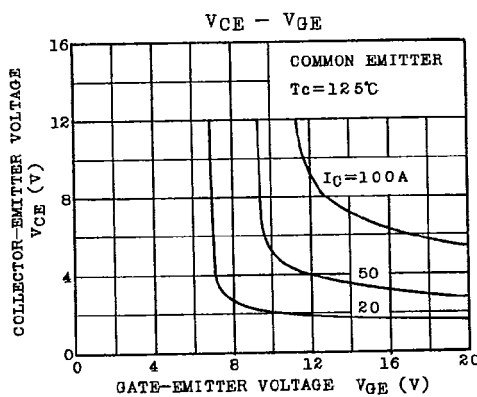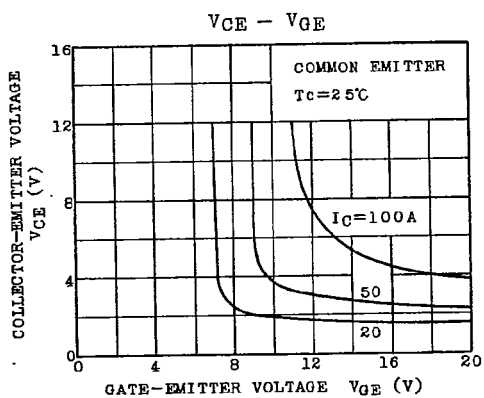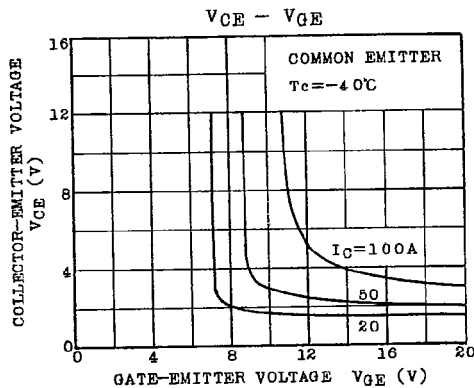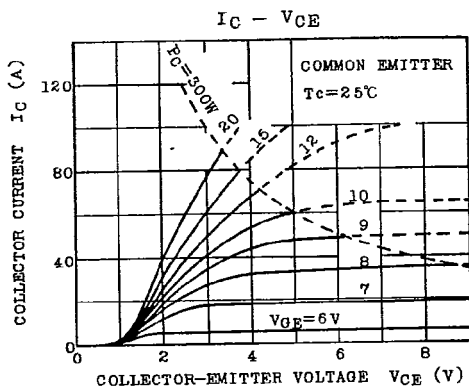

TOSHIBA SEMICONDUCTOR
TECHNICAL DATA

MG50H2YS1

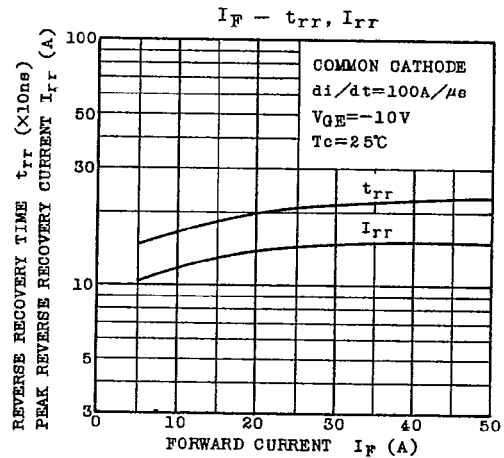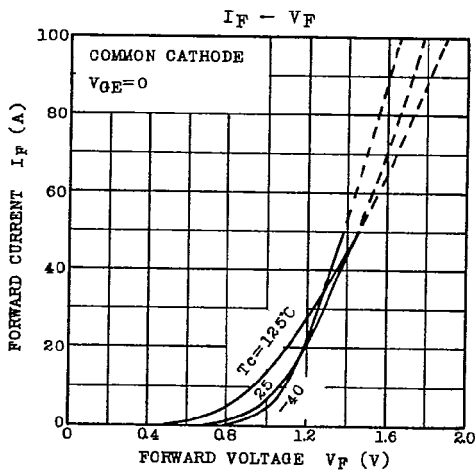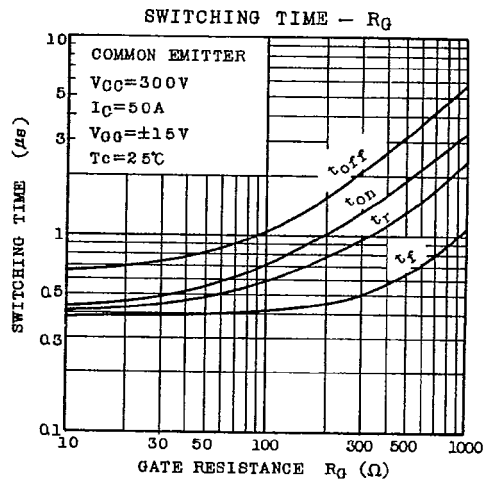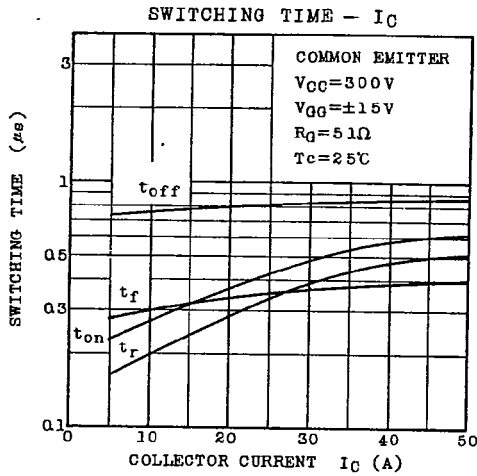

TOSHIBA SEMICONDUCTOR
TECHNICAL DATA

MG50H2YS1

