


DATA SHEET

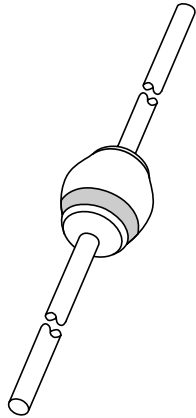

BYM36 series Fast soft-recovery controlled avalanche rectifiers

Product specification
Supersedes data of 1996 May 30

1996 Sep 18

Fast soft-recovery controlled avalanche rectifiers

BYM36 series


FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Available in ammo-pack
- Also available with preformed leads for easy insertion.

DESCRIPTION

Rugged glass SOD64 package, using a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

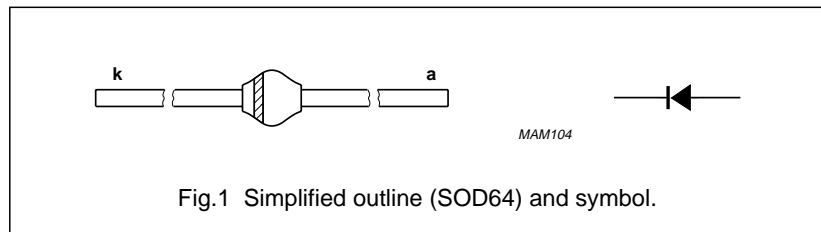

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|-------------|---------------------------------|--|------|--------------|--------|
| V_{RRM} | repetitive peak reverse voltage | | | | |
| | BYM36A | | – | 200 | V |
| | BYM36B | | – | 400 | V |
| | BYM36C | | – | 600 | V |
| | BYM36D | | – | 800 | V |
| | BYM36E | | – | 1000 | V |
| | BYM36F BYM36G | | – | 1200 1400 | V V |
| V_R | continuous reverse voltage | | | | |
| | BYM36A | | – | 200 | V |
| | BYM36B | | – | 400 | V |
| | BYM36C | | – | 600 | V |
| | BYM36D | | – | 800 | V |
| | BYM36E | | – | 1000 | V |
| | BYM36F BYM36G | | – | 1200 1400 | V V |
| $I_{F(AV)}$ | average forward current | $T_{tp} = 55\text{ °C}$; lead length = 10 mm; see Figs 2; 3 and 4 | | | |
| | BYM36A to C | averaged over any 20 ms period; see also Figs 14; 15 and 16 | – | 3.0 | A |
| | BYM36D and E BYM36F and G | | – | 2.9 2.9 | A A |
| $I_{F(AV)}$ | average forward current | $T_{amb} = 65\text{ °C}$; PCB mounting (see Fig.25); see Figs 5; 6 and 7 | | | |
| | BYM36A to C | averaged over any 20 ms period; see also Figs 14; 15 and 16 | – | 1.25 | A |
| | BYM36D and E BYM36F and G | | – | 1.20 1.15 | A A |

Fast soft-recovery controlled avalanche rectifiers

BYM36 series

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|-----------|--|---|------|------|------|
| I_{FRM} | repetitive peak forward current | $T_{tp} = 55\text{ °C}$; see Figs 8; 9 and 10 | – | 37 | A |
| | BYM36A to C | | | 33 | A |
| | BYM36D and E BYM36F and G | | | 27 | A |
| I_{FRM} | repetitive peak forward current | $T_{amb} = 65\text{ °C}$; see Figs 11; 12 and 13 | – | 13 | A |
| | BYM36A to C | | | 11 | A |
| | BYM36D and E BYM36F and G | | | 10 | A |
| I_{FSM} | non-repetitive peak forward current | $t = 10\text{ ms}$ half sine wave; $T_j = T_{j\text{ max}}$ prior to surge; $V_R = V_{RRM\text{ max}}$ | – | 65 | A |
| E_{RSM} | non-repetitive peak reverse avalanche energy | $L = 120\text{ mH}$; $T_j = T_{j\text{ max}}$ prior to surge; inductive load switched off | – | 10 | mJ |
| T_{stg} | storage temperature | | –65 | +175 | °C |
| T_j | junction temperature | see Figs 17 and 18 | –65 | +175 | °C |

ELECTRICAL CHARACTERISTICS

$T_j = 25\text{ °C}$ unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT | | |
|-------------|-------------------------------------|---|------|------|--------------|------|---|--------|
| V_F | forward voltage | $I_F = 3\text{ A}$; $T_j = T_{j\text{ max}}$; see Figs 19; 20 and 21 | – | – | 1.22 | V | | |
| | BYM36A to C | | | | 1.28 | V | | |
| | BYM36D and E BYM36F and G | | | | 1.24 | V | | |
| V_F | forward voltage | $I_F = 3\text{ A}$; see Figs 19; 20 and 21 | – | – | 1.60 | V | | |
| | BYM36A to C | | | | 1.78 | V | | |
| | BYM36D and E BYM36F and G | | | | 1.57 | V | | |
| $V_{(BR)R}$ | reverse avalanche breakdown voltage | $I_R = 0.1\text{ mA}$ | | | | | | |
| | BYM36A | | | | 300 | – | – | V |
| | BYM36B | | | | 500 | – | – | V |
| | BYM36C | | | | 700 | – | – | V |
| | BYM36D | | | | 900 | – | – | V |
| | BYM36E | | | | 1100 | – | – | V |
| | BYM36F BYM36G | | | | 1300 1500 | – | – | V V |
| I_R | reverse current | $V_R = V_{RRM\text{ max}}$; see Fig.22 | – | – | 5 | μA | | |
| | | $V_R = V_{RRM\text{ max}}$; $T_j = 165\text{ °C}$; see Fig.22 | – | – | 150 | μA | | |

Fast soft-recovery controlled avalanche rectifiers

BYM36 series

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|----------------------------------|---|--|------|------|------|------------|
| t_{rr} | reverse recovery time | when switched from $I_F = 0.5$ A to $I_R = 1$ A; measured at $I_R = 0.25$ A; see Fig. 26 | – | – | 100 | ns |
| | BYM36A to C | | | | | |
| | BYM36D and E | | | | | |
| C_d | diode capacitance | $f = 1$ MHz; $V_R = 0$ V; see Figs 23 and 24 | – | 85 | – | pF |
| | BYM36A to C | | | | | |
| | BYM36D and E | | | | | |
| $\left \frac{dI_R}{dt} \right $ | maximum slope of reverse recovery current | when switched from $I_F = 1$ A to $V_R \geq 30$ V and $dI_F/dt = -1$ A/ μ s; see Fig.27 | – | – | 7 | A/ μ s |
| | BYM36A to C | | | | | |
| | BYM36D and E | | | | | |
| | BYM36F and G | | | | | |

THERMAL CHARACTERISTICS

| SYMBOL | PARAMETER | CONDITIONS | VALUE | UNIT |
|----------------|---|---------------------|-------|------|
| $R_{th\ j-tp}$ | thermal resistance from junction to tie-point | lead length = 10 mm | 25 | K/W |
| $R_{th\ j-a}$ | thermal resistance from junction to ambient | note 1 | 75 | K/W |





Note

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer ≥ 40 μ m, see Fig.25. For more information please refer to the "General Part of associated Handbook".

Fast soft-recovery
controlled avalanche rectifiers




BYM36 series

GRAPHICAL DATA

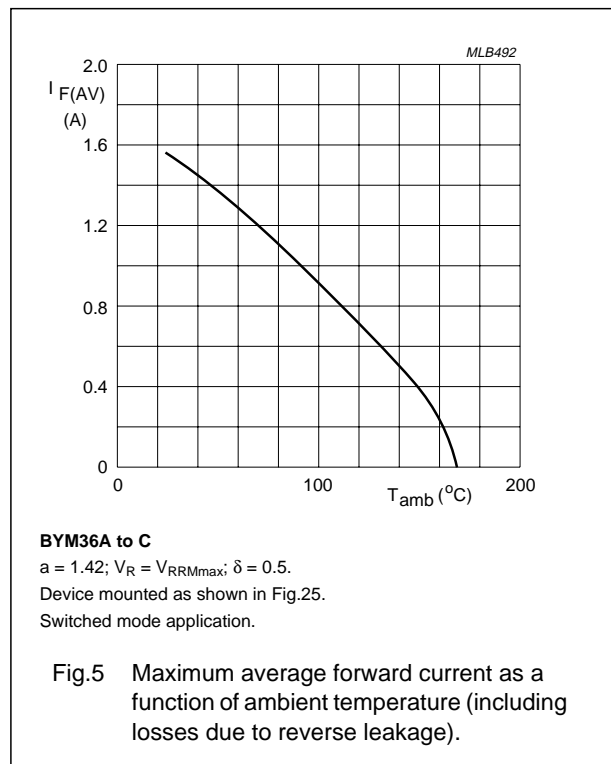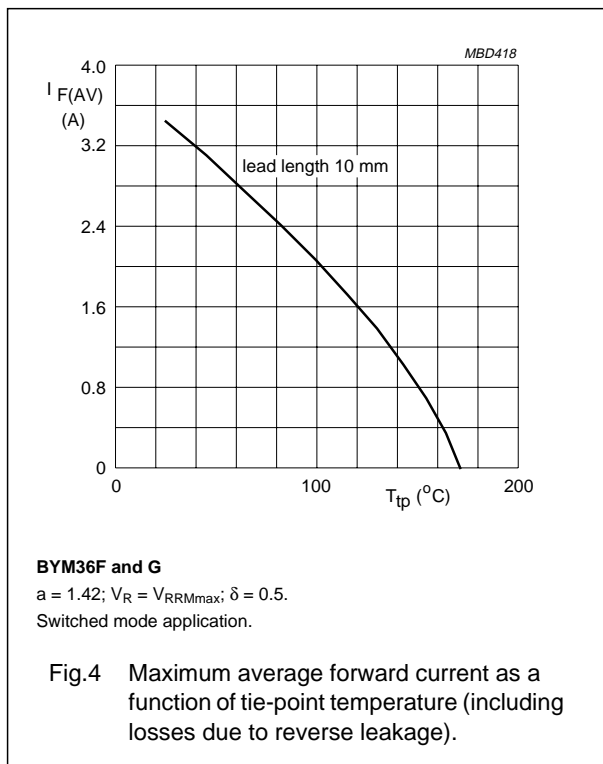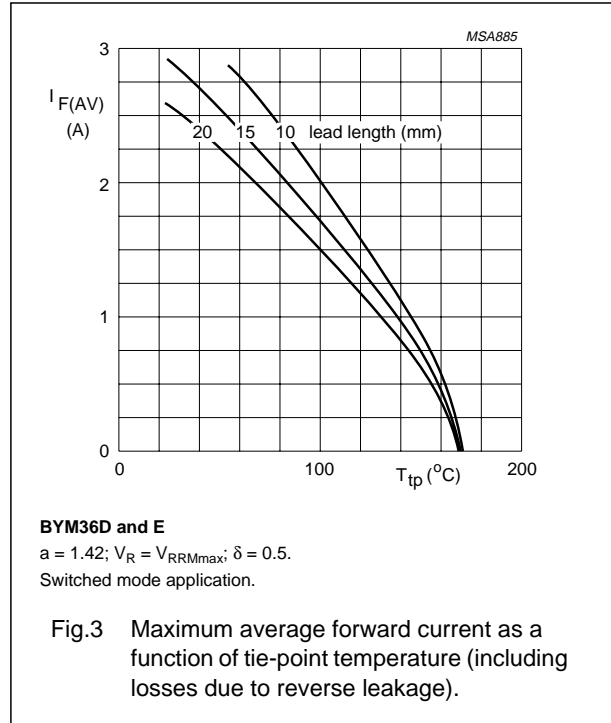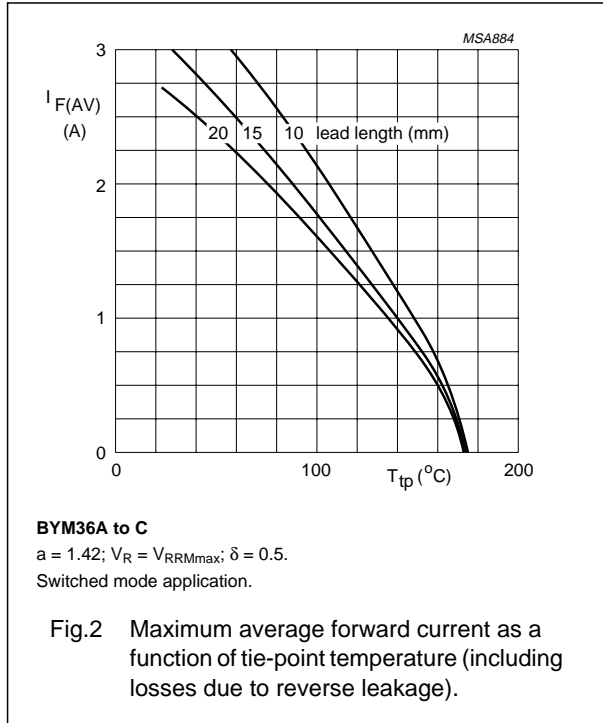



Fast soft-recovery
controlled avalanche rectifiers

BYM36 series

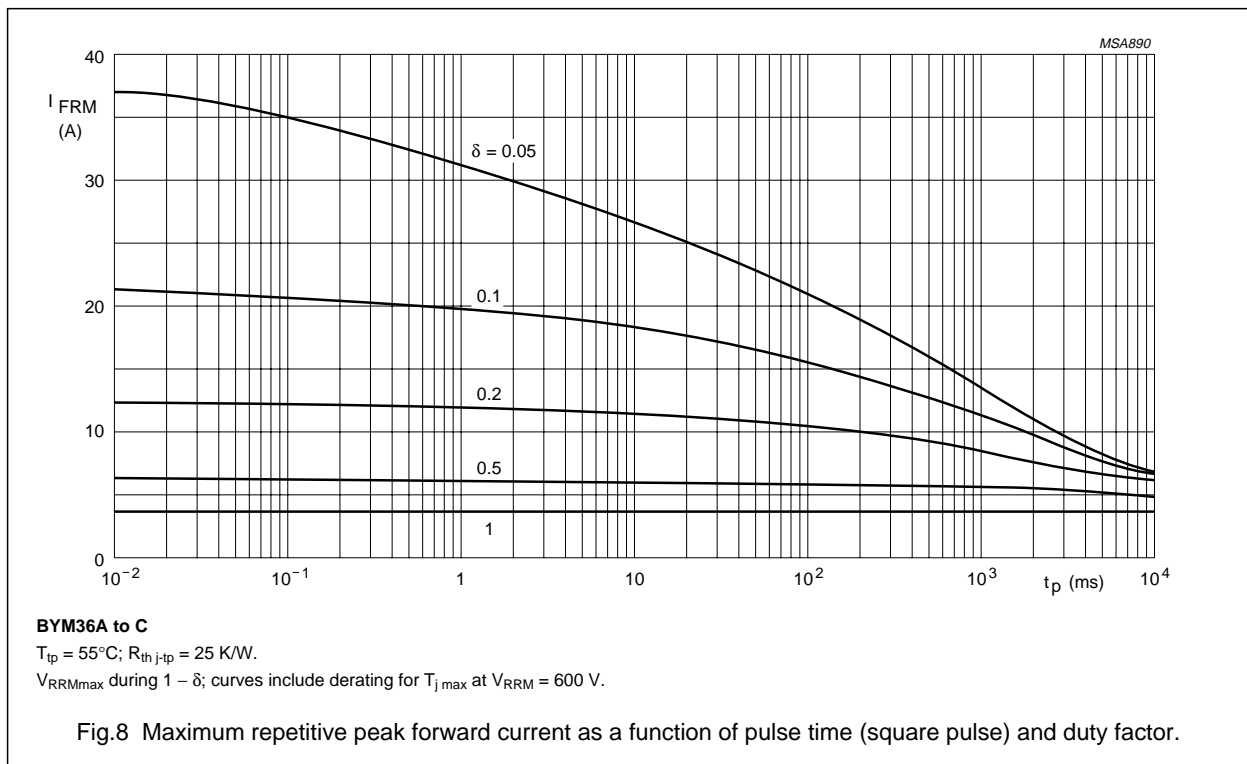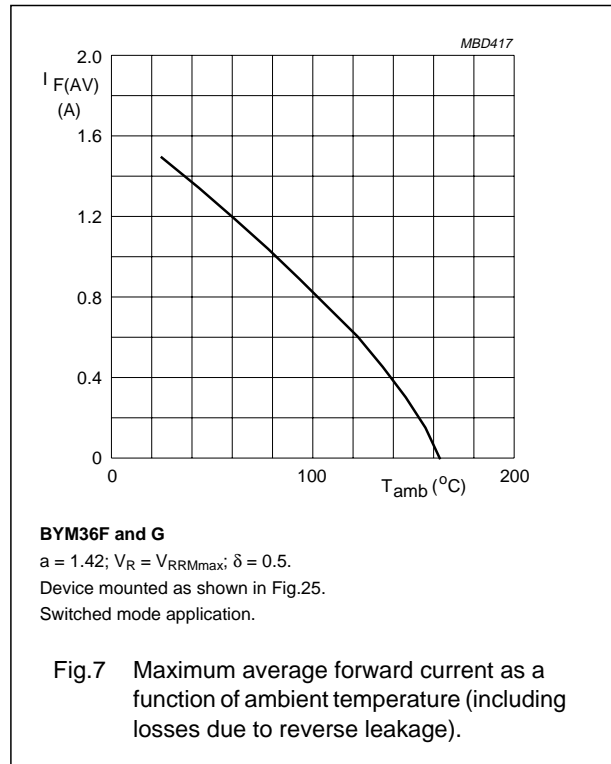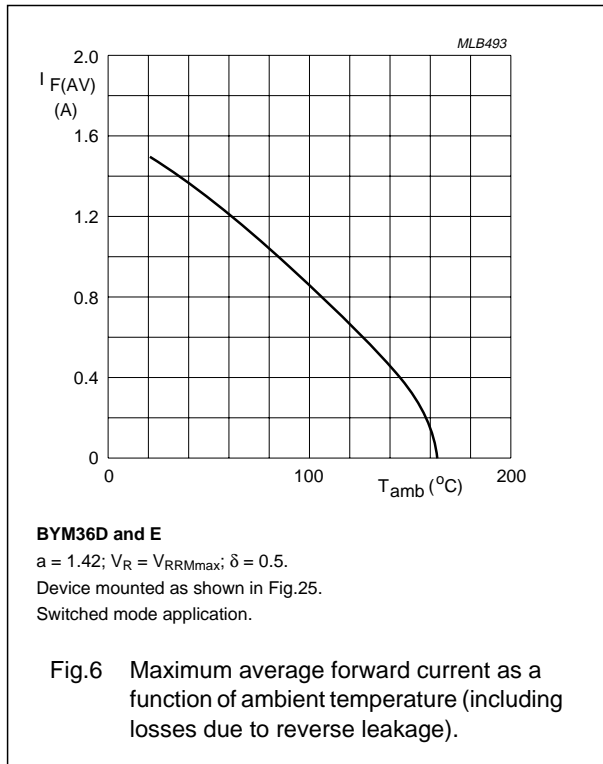



Fast soft-recovery
controlled avalanche rectifiers

BYM36 series

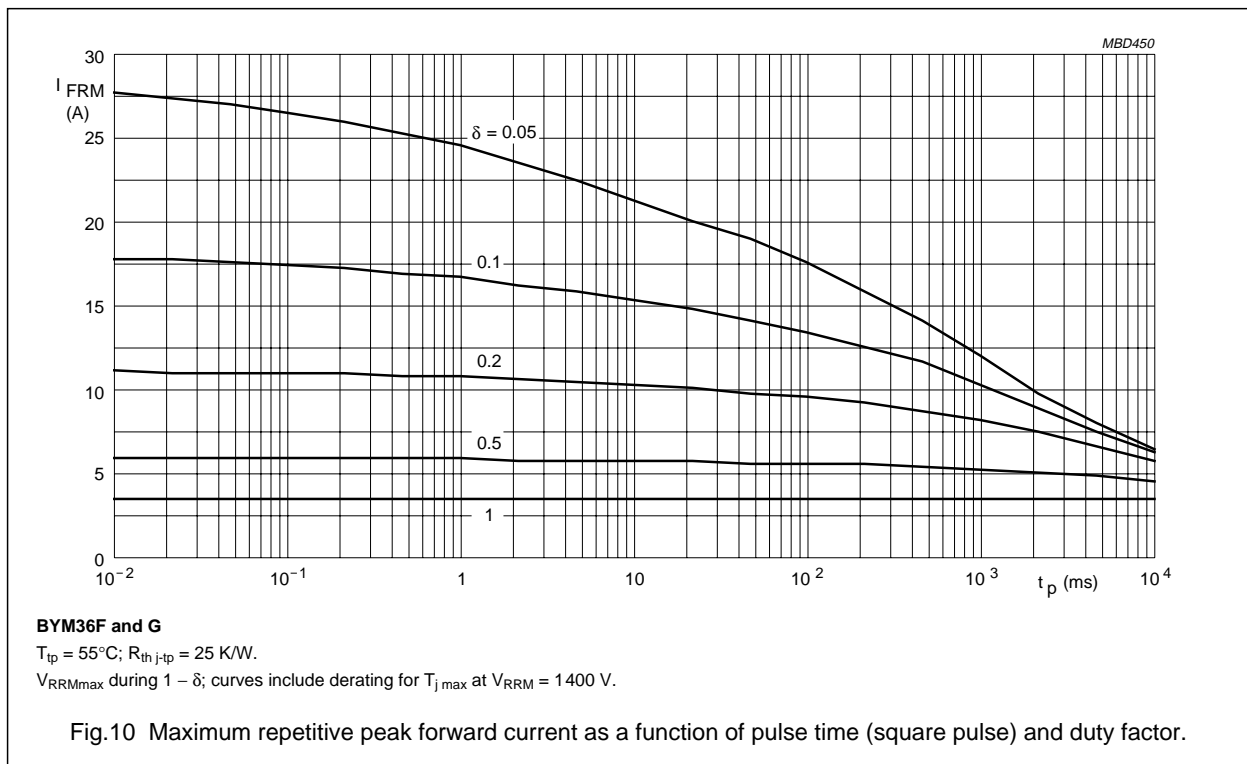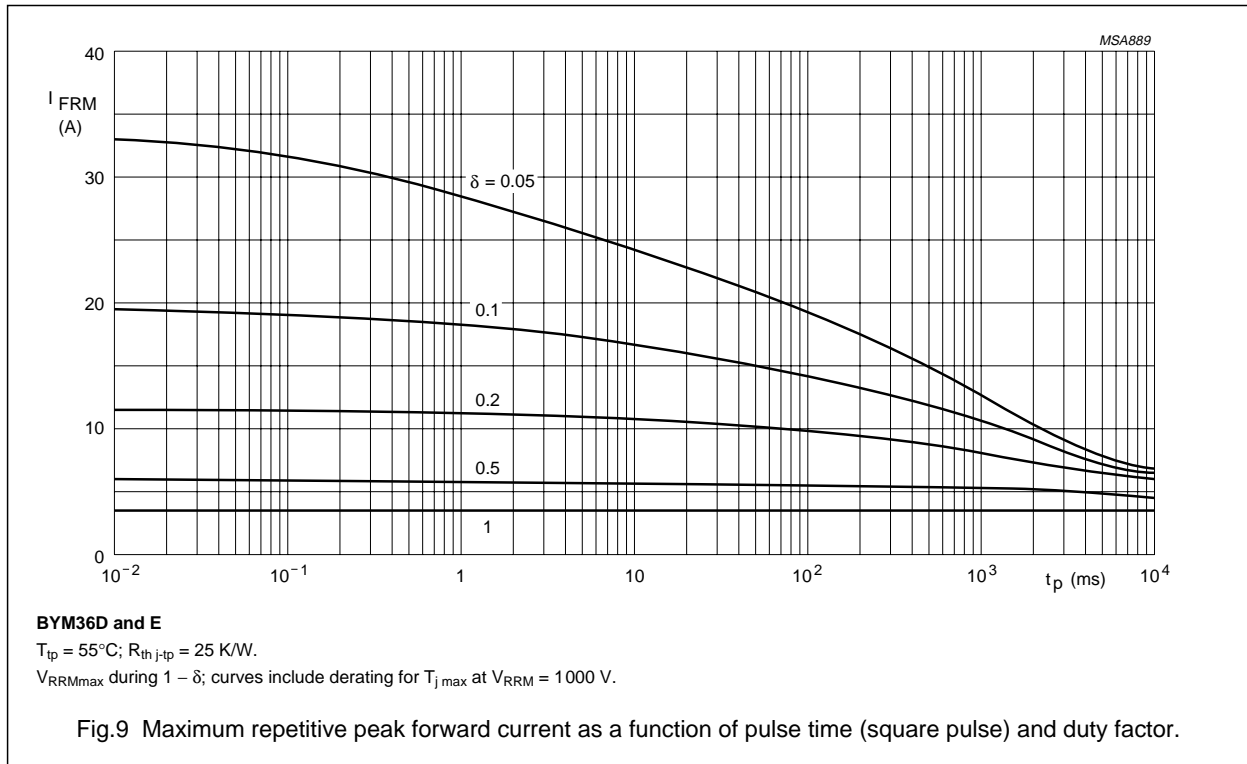




Fast soft-recovery
controlled avalanche rectifiers

BYM36 series

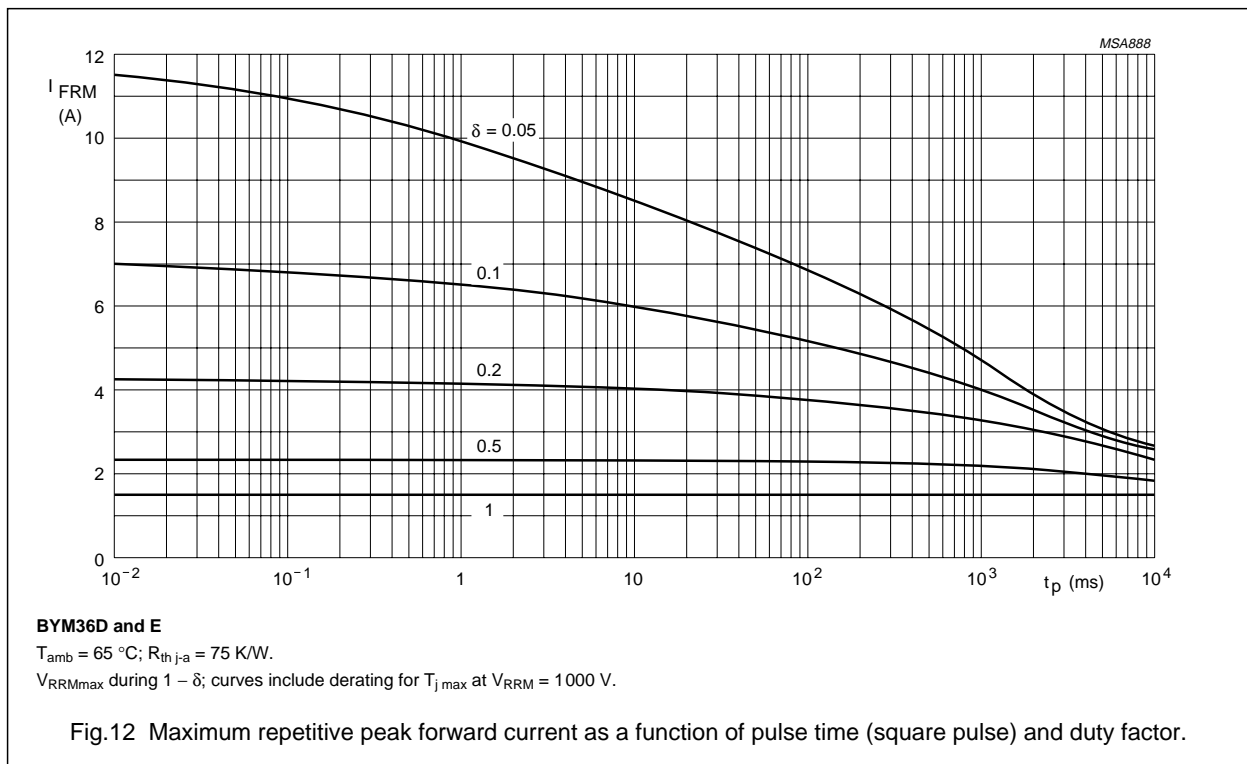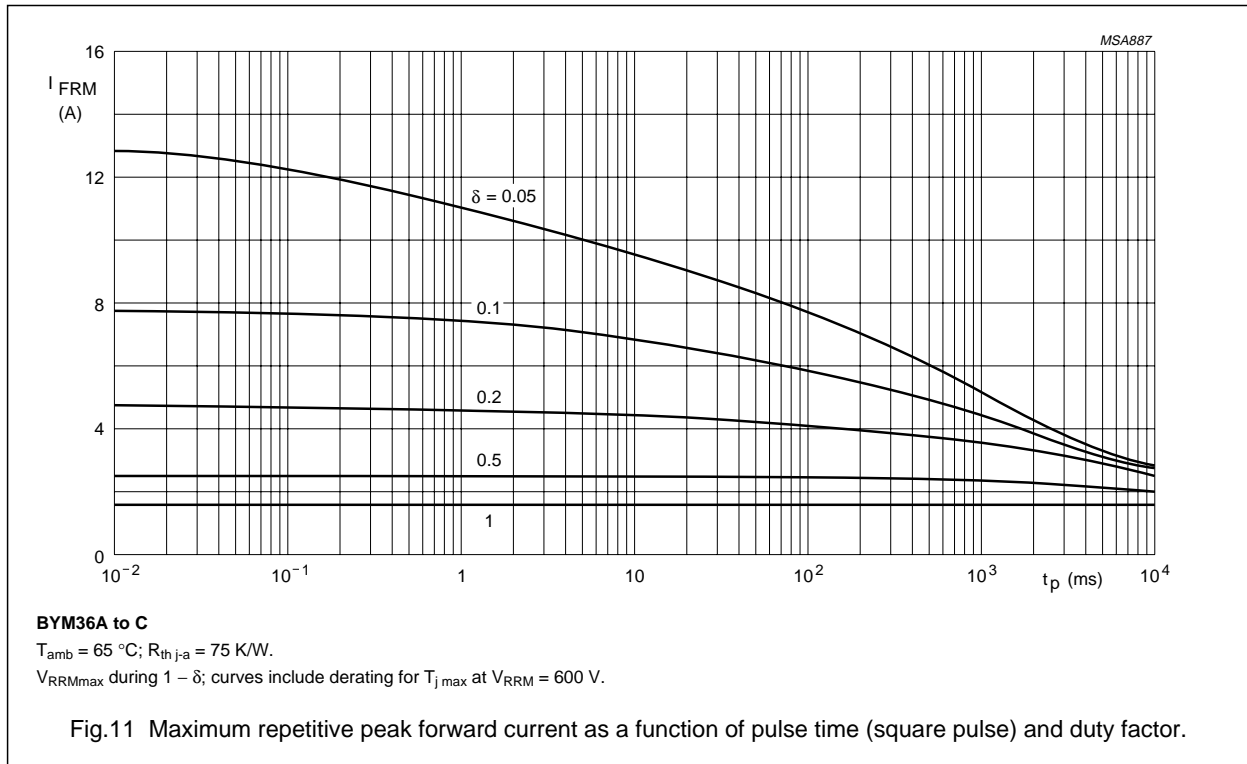





Fast soft-recovery
controlled avalanche rectifiers

BYM36 series

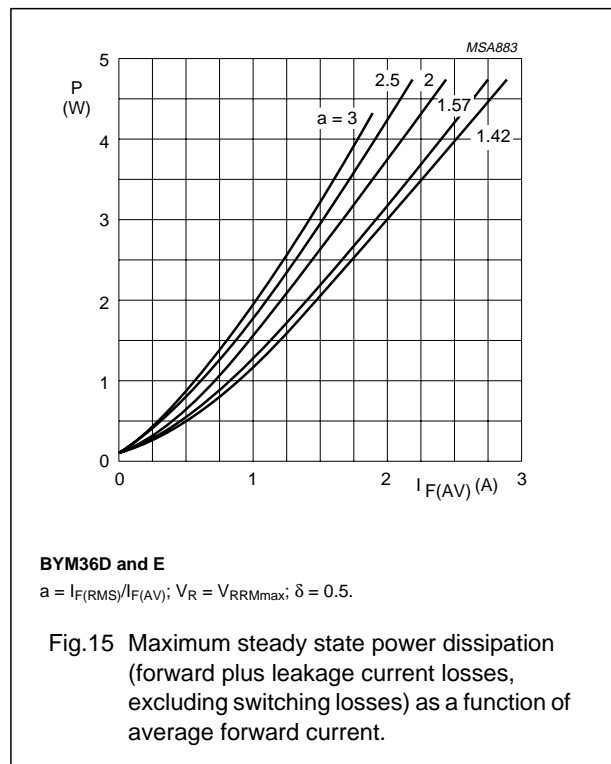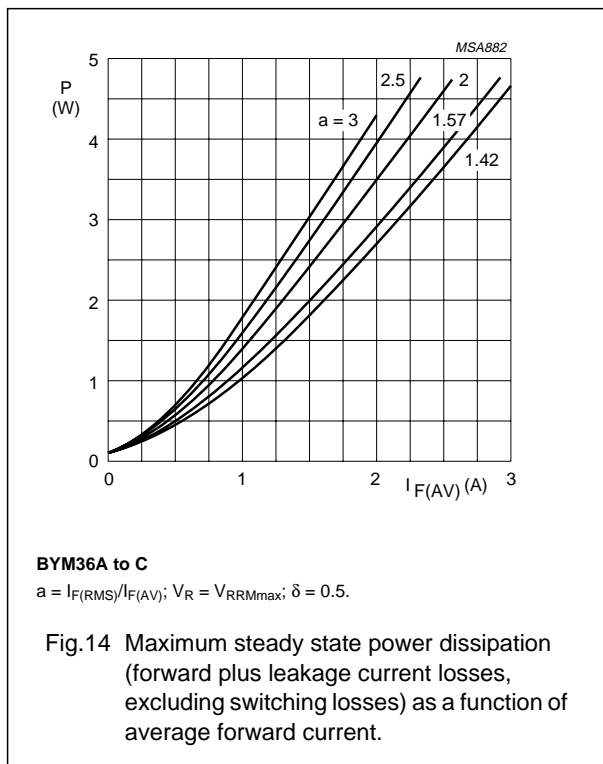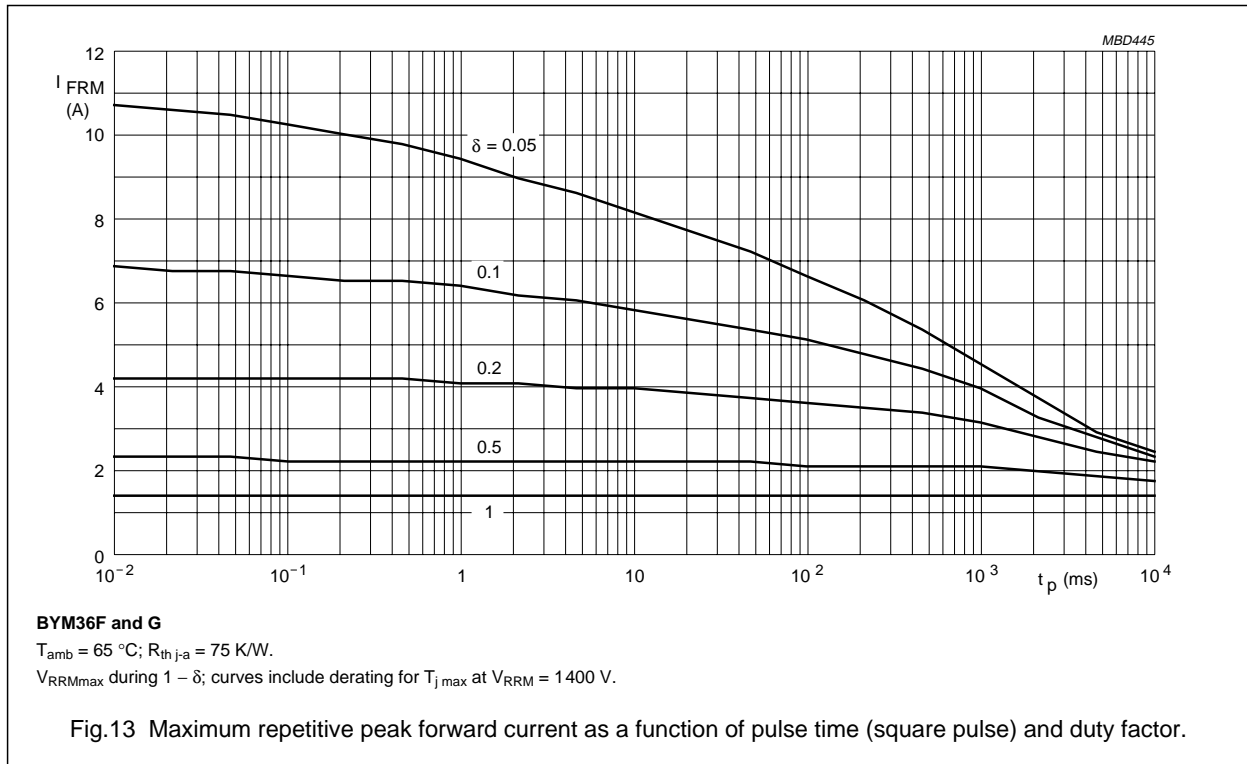





Fast soft-recovery
controlled avalanche rectifiers

BYM36 series

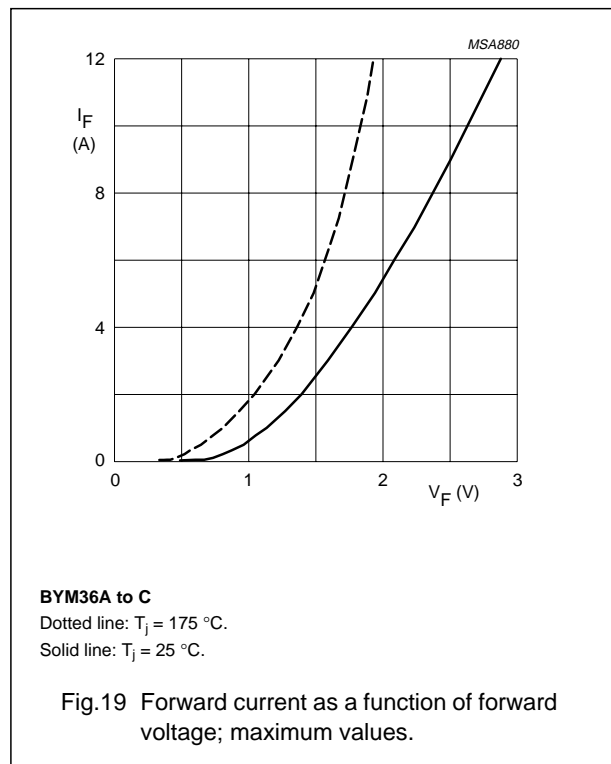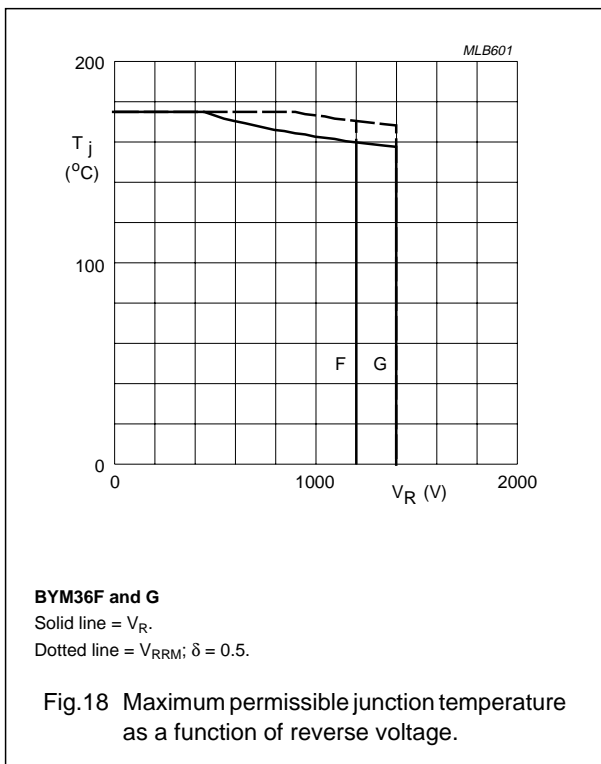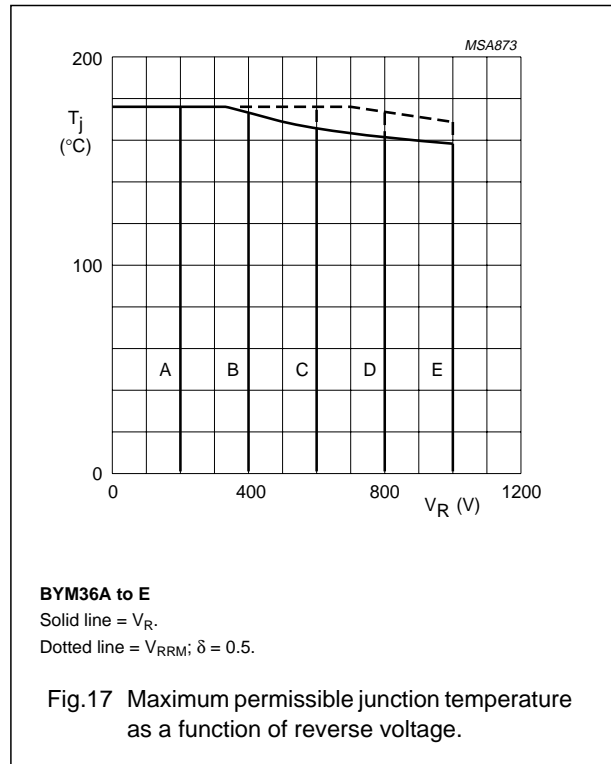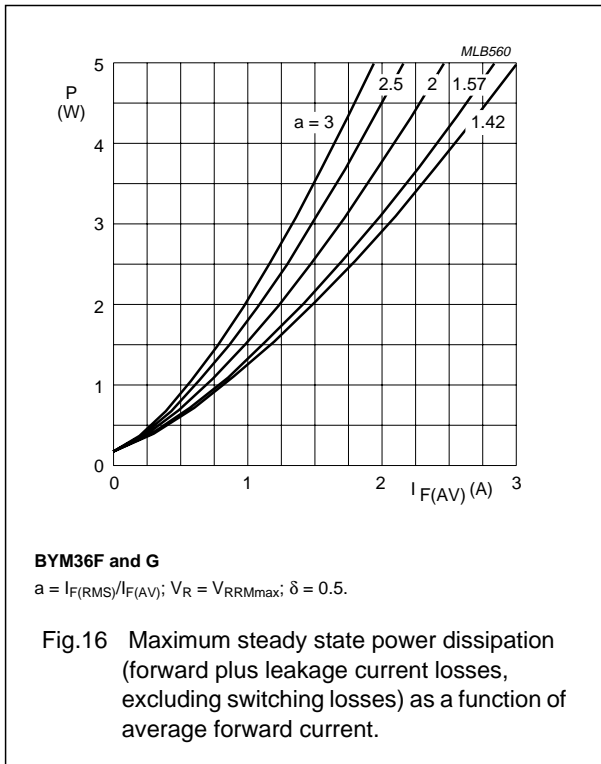




Fast soft-recovery
controlled avalanche rectifiers

BYM36 series

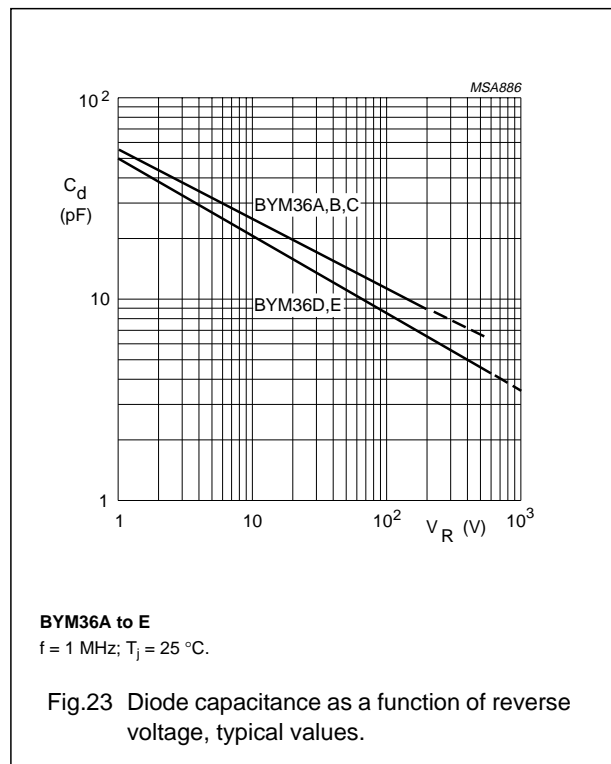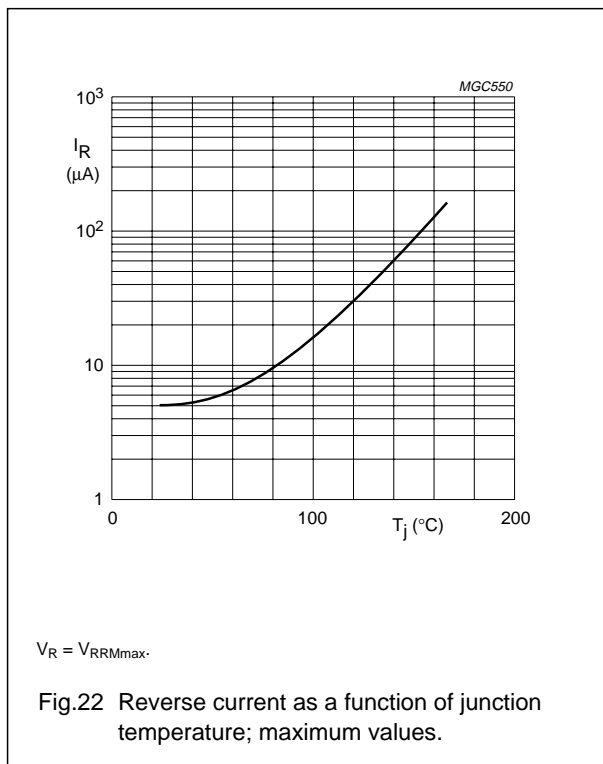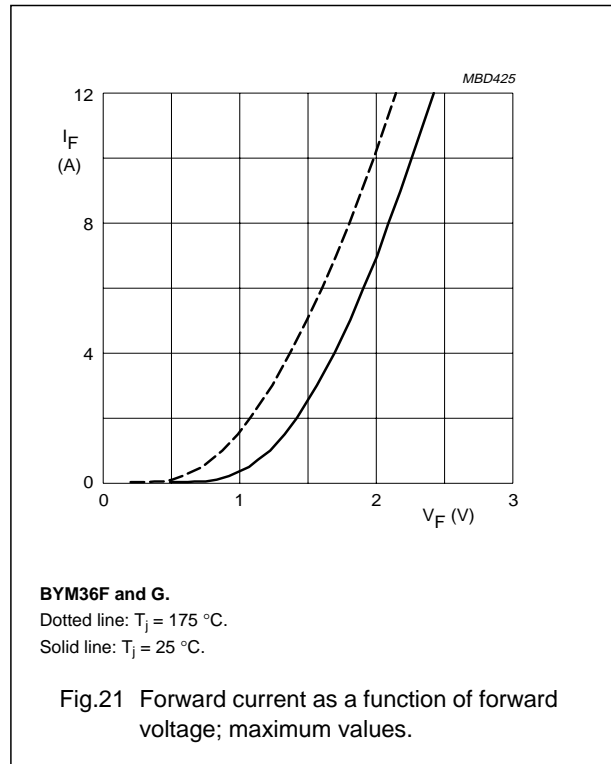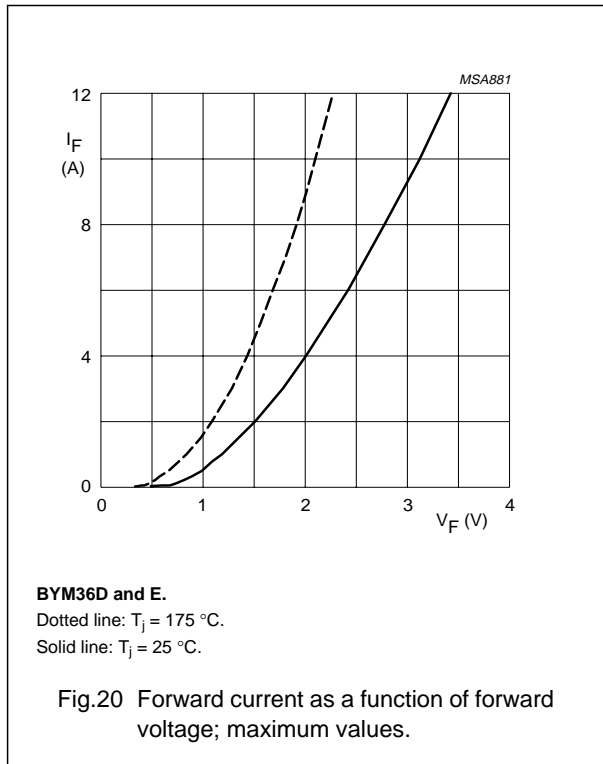

Fast soft-recovery controlled avalanche rectifiers

BYM36 series

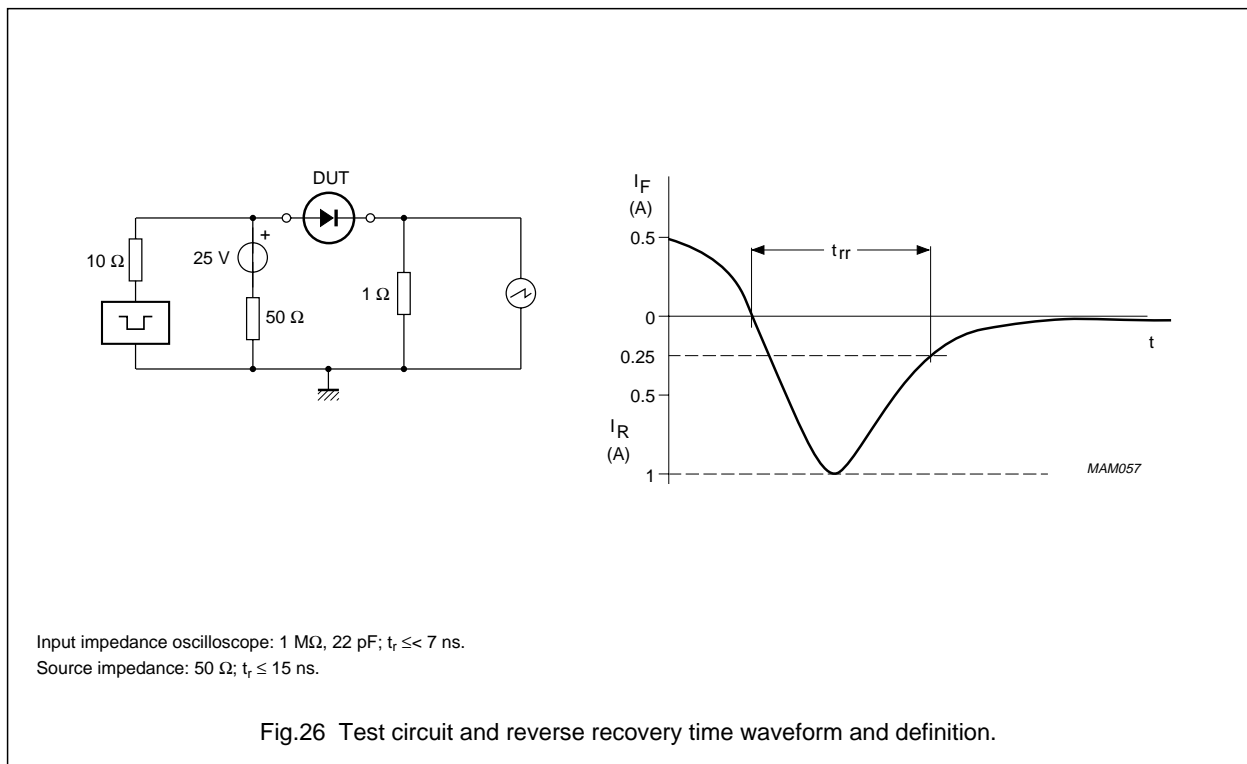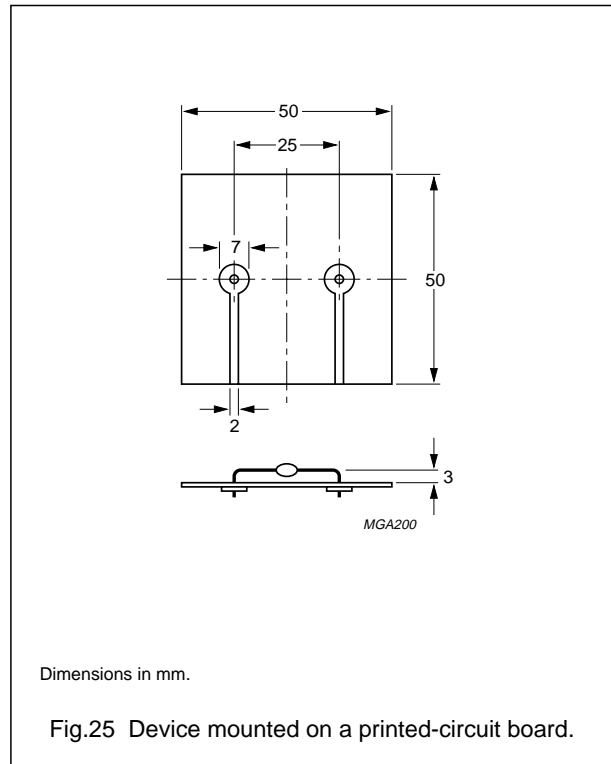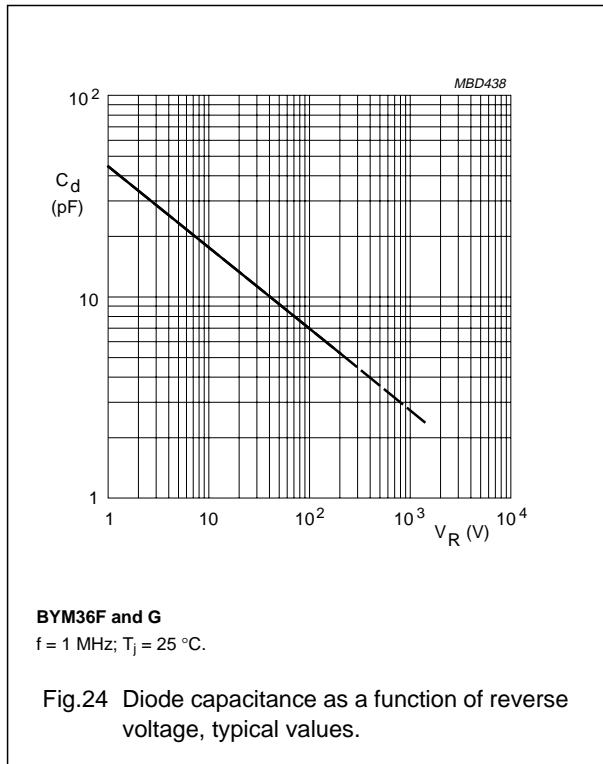

Fast soft-recovery
controlled avalanche rectifiers

BYM36 series


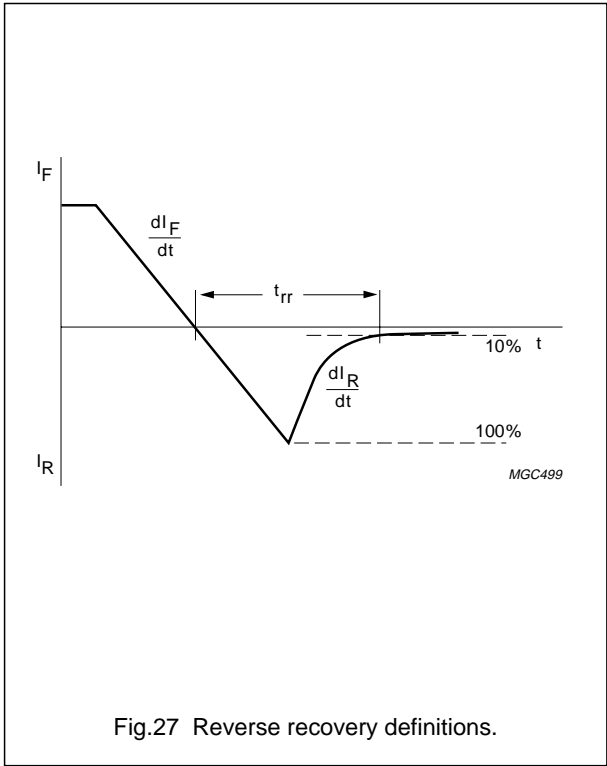


Fig.27 Reverse recovery definitions.

Fast soft-recovery controlled avalanche rectifiers

BYM36 series

PACKAGE OUTLINE

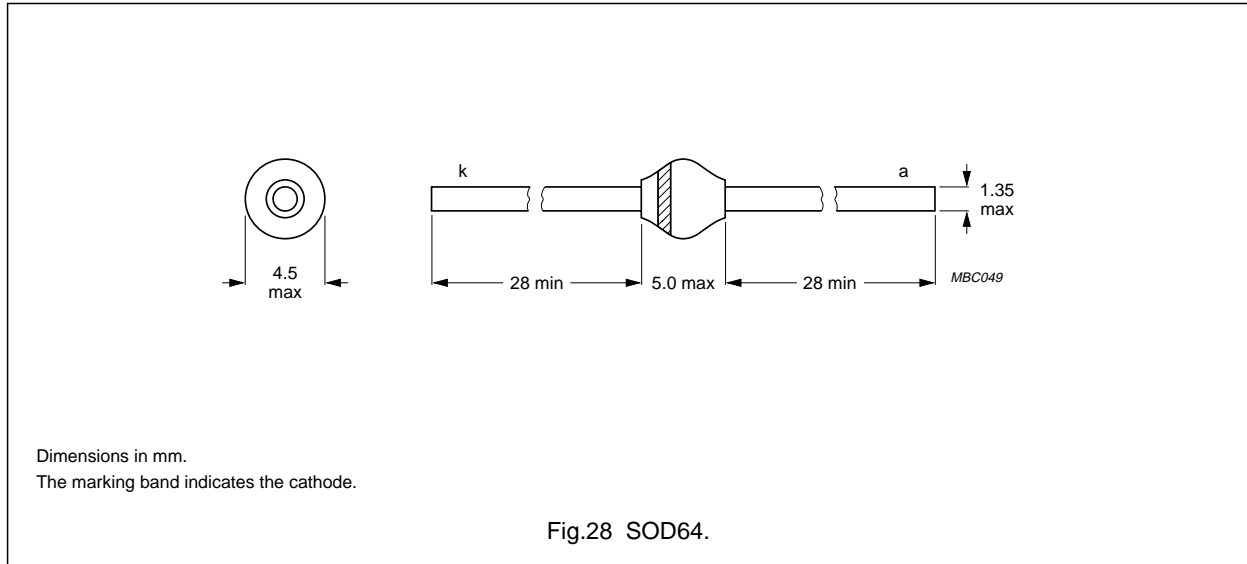

DEFINITIONS

| Data Sheet Status | |
|---|---|
| Objective specification | This data sheet contains target or goal specifications for product development. |
| Preliminary specification | This data sheet contains preliminary data; supplementary data may be published later. |
| Product specification | This data sheet contains final product specifications. |
| Limiting values | |
| Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability. | |
| Application information | |
| Where application information is given, it is advisory and does not form part of the specification. | |

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.