

TRANSISTOR MODULE

QCA200A40/60



UL;E76102(M)

QCA200 is a dual Darlington power transistor module which has series-connected high speed, high power Darlington transistors. Each transistor has a reverse paralleled fast recovery diode. The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction,

- $I_C=200A$ 、 $V_{CEX}=400/600V$
- Low saturation voltage for higher efficiency.
- High DC current gain h_{FE}
- Isolated mounting base
- $V_{EBO} 10V$ for faster switching speed.

(Applications)

Motor Control (VVVF), AC/DC Servo, UPS, Switching Power Supply, Ultrasonic Application

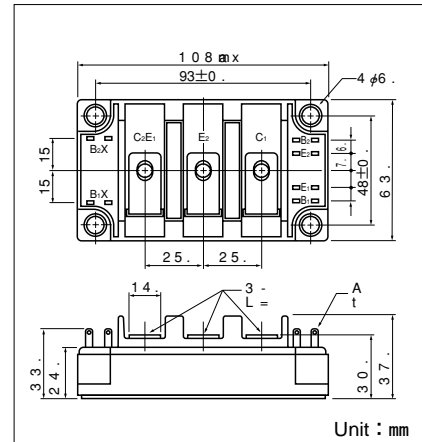

Maximum Ratings

($T_j=25^{\circ}C$ unless otherwise specified)

Symbol	Item		Conditions	Ratings		Unit
				QCA200A40	QCA200A60	
V_{CBO}	Collector-Base Voltage			400	600	V
V_{CEX}	Collector-Emitter Voltage		$V_{BE}=-2V$	400	600	V
V_{EBO}	Emitter-Base Voltage			10		V
I_C	Collector Current		() $p_w \leq 1ms$	200 (400)		A
$-I_C$	Reverse Collector Current			200		A
I_B	Base Current			12		A
P_T	Total power dissipation		$T_c=25^{\circ}C$	1250		W
T_j	Junction Temperature			-40 to +150		$^{\circ}C$
T_{stg}	Storage Temperature			-40 to +125		$^{\circ}C$
V_{iso}	Isolation Voltage		A.C.1minute	2500		V
	Mounting Torque	Mounting (M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)		N·m (kgf·cm)
		Terminal (M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)		
	Mass		Typical Value	470		g

Electrical Characteristics

Symbol	Item		Conditions	Ratings		Unit
				Min.	Max.	
I_{CBO}	Collector Cut-off Current		$V_{CB}=V_{CBO}$		2.0	mA
I_{EBO}	Emitter Cut-off Current		$V_{EB}=V_{EBO}$		800	mA
$V_{CEO(SUS)}$	Collector Emitter Sustaining Voltage	QCA200A40	$I_C=1A$	300		V
		QCA200A60		450		
$V_{CEX(SUS)}$	Collector Emitter Sustaining Voltage	QCA200A40	$I_C=40A, I_{B2}=-8A$	400		V
		QCA200A60		600		
h_{FE}	DC Current Gain		$I_C=200A, V_{CE}=2V$ $I_C=200A, V_{CE}=5V$	75		
				100		
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage		$I_C=200A, I_B=2.7A$	2.0		V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage		$I_C=200A, I_B=2.7A$	2.5		V
t_{on}	Switching Time	On Time	$V_{CC}=300V, I_C=200A$ $I_{B1}=4A, I_{B2}=-4A$	2.0		μs
t_s		Storage Time		12.0		
t_f		Fall Time		3.0		
V_{ECO}	Collector-Emitter Reverse Voltage		$-I_C=200A$	1.4		V
$R_{th(j-c)}$	Thermal Impedance (junction to case)		Transistor part	0.1		$^{\circ}C/W$
			Diode part	0.3		

