


NUMBER C-177907
 METRIC
 3角錐 (30°) 錐度投影

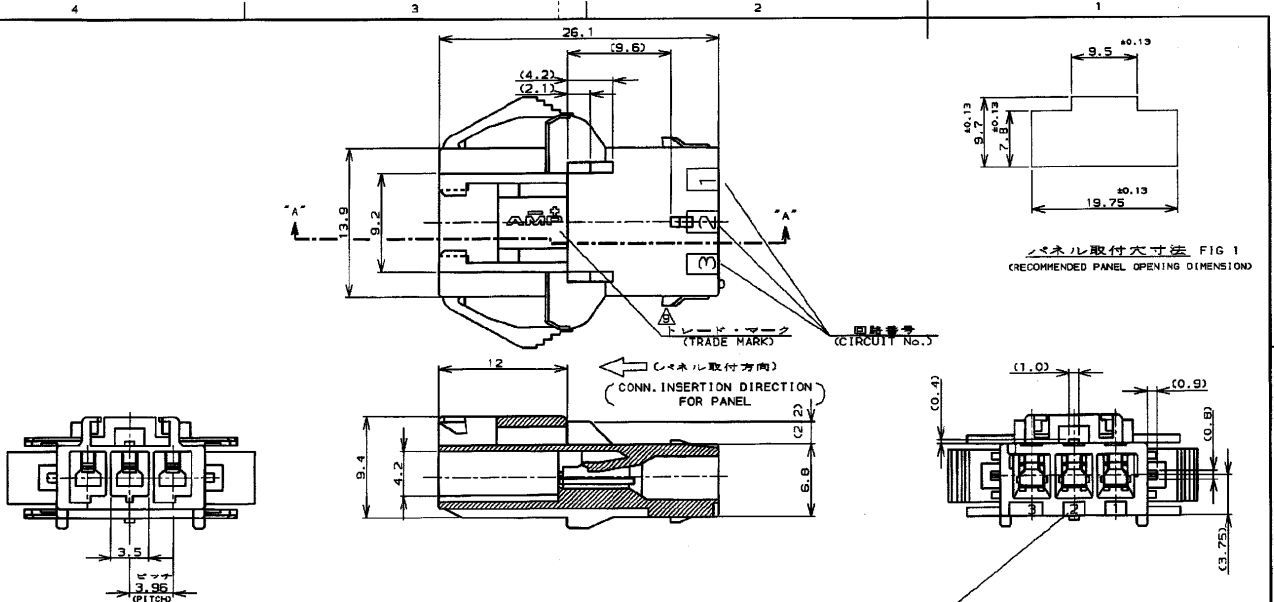

パネル取付寸法図 FIG 1
 (RECOMMENDED PANEL OPENING DIMENSION)

- NOTES
- PRODUCT SPEC.: 108-5410
 - APPLICABLE CONTACT P/N
 TAB CONTACT: 177917-□ (*20-#16AWG)
 REC CONTACT: 177915-□ (*20-#16AWG)
 177916-□ (*26-#22AWG)
 - MATING CONN. P/N
 PLUG HSG: 177899-□
 REC CONTACT: 177915-□ (*20-#16AWG)
 177914-□ (*26-#22AWG)
 - APPLICABLE PLATE P/N: 177919-□
 - INSTRUCTION SHEET: 411-5638
 - APPLICABLE PANEL THICKNESS: 0.8-2.0 (SEE FIG 1)
 - INSERT CONN. FROM PRESS DIRECTION SIDE FOR METAL PANEL.
 - EDGE OF THICKNESS WAY MUST NOT ROUND FOR MOLDED PANEL.
- △ SEE TABLE 1

表1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
— AMP OR AMP	日本 (JAPAN)
—+ AMP OR AMP	中国 (CHINA/PRC)
* AMP OR AMP	韓国 (KOREA)

色 (COLOR)	記号 (SYMBOL)	番号 (NO.)
黒 (BLACK)	▲	-5
青 (BLUE)	■	-6
黄 (YELLOW)	□	-4
赤 (RED)	▼	-2
自然色 (NATURAL)	○	177907-1
ハウジング色調 (HOUSING COLOR)	□Pos.	型番 (P/N)

- 注:
- 適用製品規格: 108-5410
 - 適用コネクタ型番
 タブ・コンタクト: 177917-□ (*20-#16AWG)
 177916-□ (*26-#22AWG)
 - 適合標準型製品型番
 プラグ・ハウジング: 177899-□
 リセ・コンタクト: 177915-□ (*20-#16AWG)
 177914-□ (*26-#22AWG)
 - 適用プレート型番: 177919-□
 - 取扱い時番号: 411-5638
 - 適用パネル厚: 0.8-2.0 (FIG 1参照)
 - 金属パネルの場合、コネクタ取付方向をハンチ加工方向にしてください。
 - プラスチック・パネルの場合、穴端部にRを必要に応じて配してください。
- △ 表1参照

Copyright ©1993年 AMP Japan, Ltd. ALL RIGHTS RESERVED.		Copyright ©1993 AMP Japan, Ltd. ALL RIGHTS RESERVED.		AMP Tyco Electronics AMP K.K. Kawasaki, Japan	
部品名 (PART NAME)	3.95mmピッチ 6マウント・ハウジング (パネル取付タイプ) 3.95mm PITCH 6 CONTACT HOUSING (PANEL MOUNT)	材質 (MATERIAL)	ABS	色 (COLOR)	自然色 (NATURAL)
寸法 (DIMENSIONS)	3.95mm (0.155in)	仕様 (SPECIFICATION)	UL94V-0	標準寸法 (STANDARD DIMENSIONS)	3.95mm (0.155in)
製造 (MANUFACTURE)	AMP	検査 (INSPECTION)	合格 (PASS)	サイズ (SIZE)	A3 J
設計 (DESIGN)	M. SUZUKI	承認 (APPROVAL)	M. SUZUKI	図番 (DRAWING NO.)	C-177907
検査 (CHECK)	H. SHINDO	検査 (CHECK)	H. SHINDO	尺取 (SCALE)	1:1
作成 (DRAWN)	M. SUZUKI	検査 (CHECK)	H. SHINDO	訂正 (REV.)	C
承認 (APPROVED)	M. SUZUKI	検査 (CHECK)	H. SHINDO	シート (SHEET)	1 OF 1

CUSTOMER DRAWING