

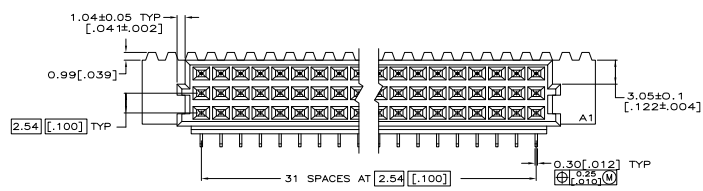
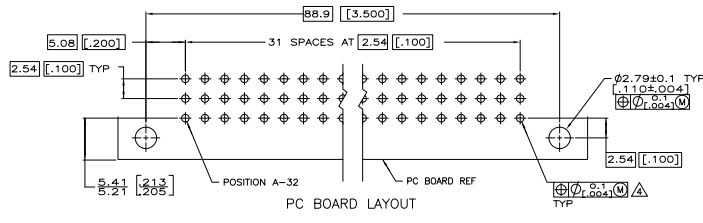




REV	DATE	DESCRIPTION	BY	CHK	APP
AD	25	RELEASE PER EC 0512-0082-05			



- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ CONTACT MATERIAL: COPPER ALLOY.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA.  
TIN PLATE ON POSTS.
- △ COMPLIANT PIN REQUIRES 1.57[.062] MINIMUM THICK PC BOARD, RECOMMENDED PC BOARD HOLES ARE Ø1.15±0.025[.0453±.0010] DRILLED HOLES WITH 0.02-0.08[.001-.003] COPPER AND 0.008[.0003] MINIMUM TIN-LEAD PLATING. FINISHED HOLES AFTER PLATING: .9094-1.09[.037-.043].
- △ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO, THIS APPROXIMATE AREA.
- △ CONTACT POINT.
- △ MARKING ON THIS SIDE.

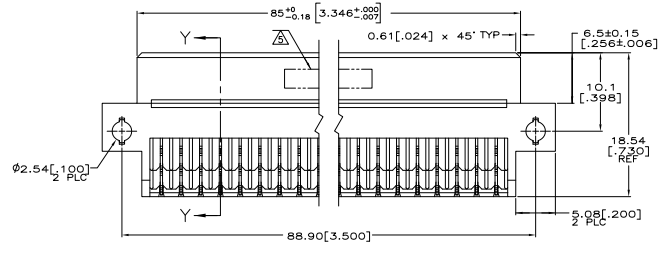

5148292-5  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV: POLYCHROME	ISSUED	By: <b>Exxaro</b>	Tyco Electronics Corporation Harrisburg, Pa 17102-3608
DESCRIPTION:	TERMINAL SYMBOL:	REV: SHAMBE	ISSUED	REV: SHAMBE	
ASSEMBLY:	RECEPTACLE, EUROCARD, TYPE R, LEAD-FREE, 96 POSITION, 2.92(115) PRESS-FIT	REV: SHAMBE	ISSUED	REV: SHAMBE	
DATE: 10/07/99	ISSUED BY: SHAMBE	REV: SHAMBE	ISSUED	REV: SHAMBE	
CUSTOMER DRAWING	A100779	G=5148292	REV: SHAMBE	ISSUED	