
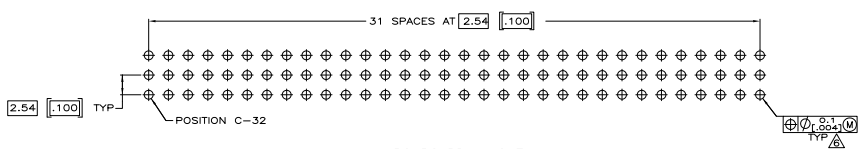


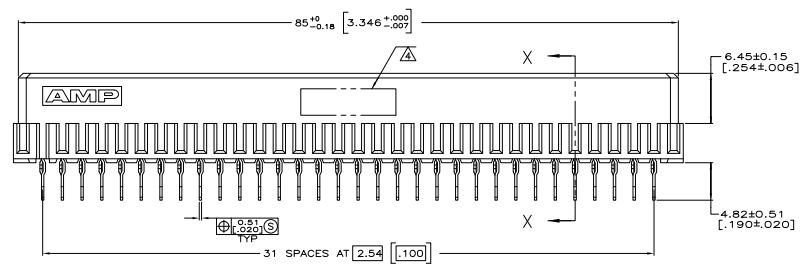


REV	DATE	DESCRIPTION	BY	CHK	APP
AD	25				
G		REVISED FOR ENH 0512-0513-04			

- △ HOUSING MATERIAL: GLASS-FILLED POLYESTER, COLOR: GRAY.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH: 0.00076[.00030] GOLD IN CONTACT AREA, 0.00127[.00050] NICKEL UNDERPLATE ALL OVER, TIN-LEAD ON POSTS.
- △ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO HOT-STAMPED IN THIS APPROXIMATE AREA.
- △ POINT OF MEASUREMENT FOR GOLD.
- △ ACTION PIN POSTS REQUIRE 1.57[.062] MIN THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE #1.51±0.02 [0.453±.001] DRILLED HOLE WITH 0.02-0.07[.001-.003] COPPER AND 0.008[.003] MIN TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING, #0.94-1.09 [0.37-.043].
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA, TIN-LEAD ON POSTS.

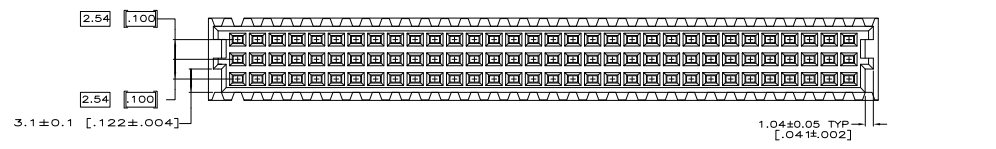

REV	DATE	DESCRIPTION	BY	CHK	APP	
1	THRU 32	X	X	X	96	535056-5
1	THRU 32	X	X	X	96	535056-4
C	B	A			96	535056-3

POSITIONS LOADED TROUS LOADES POSITION

ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: J. PATERSON

DATE: 1/17/97

ASSEMBLY, RECEPTACLE EUROCARD, TOOLLESS PRESSFIT, 36 POSITION WITHOUT MOUNTING EARS

SIZE: A1 00779 G=535056

CUSTOMER DRAWING