


- NOTES:**
- △ MATERIAL CONTACT: PHOSPHORBRONZE
  - △ MATERIAL HOUSING: GLASSFILLED POLYESTER (UL-RATING 94VO (GRAY)).
  - △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
  - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
  - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
  - △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
  - △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
  - △ CONNECTOR LUBRICATED WITH TELCORDIA APPROVED LUBRICANT.
  - △ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
  - △ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (125 HOLES).
  - △ HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED)
  - △ 0,76µm MIN GOLD PLATING AT MATING SURFACES.

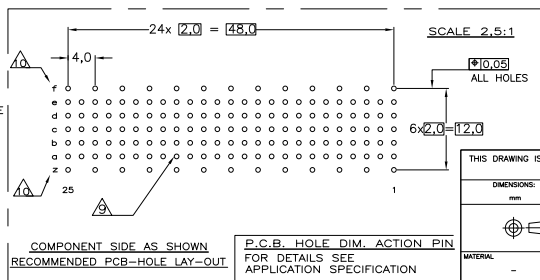

FINISH	MATERIAL	PARTNUMBER
△△△△	△	3-106774-0
△△△△	△	1-106774-9
△△△△	△	106774-9
△△△△	△	106774-4
△△△△	△	106774-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRAWN	CHK	APPD	NAME
DATE	DATE	DATE	

PRODUCT SPEC: 108-19082  
APPLICATION SPEC: 114-19029

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 106774 RESTRICTED TO: -  
CUSTOMER DRAWING SCALE: NTS SHEET: 1 OF 1 REV: P

**STE** TE Connectivity  
Z-PACK 2MM HM TYPE B  
125 POS. VERTICAL FEMALE  
CONNECTOR ASSEMBLY