

4





3

2

1

THIS DRAWING IS UNCLASSIFIED. RELEASED FOR PUBLICATION JUN. 2007.
 © COPYRIGHT 2007 BY TE CONNECTIVITY. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
B		RELEASED AS PER ECR-09-017658	08AUG09	SRE	PCH
B1		ECR-10-026537	21JAN11	KK	HMR

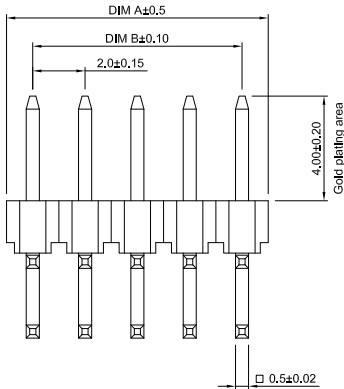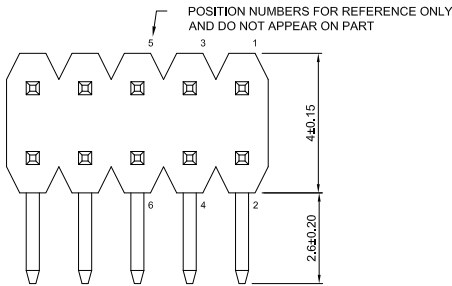

NOTE:

- ⚠ MATERIAL:
HOUSING: PA6T WITH 30% GF, UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
- ⚠ FINISH:
CONTACTS: 0.254mm [10m"] MIN. GOLD PLATED ON CONTACT AREA,
2.54mm [100m"] MIN. MATTE-TIN ON SOLDER TAIL, WITH
ENTIRE CONTACT UNDERPLATED 1.27mm [50m"] MIN. NICKEL.
- 3. WAVE SOLDER CAPABLE TO 265°C PER TE TEST SPEC.
109-202, CONDITION B.
- 4. APPLICATION :
SOLDERTAIL LENGTH 2.6 FOR PCB THICKNESS 1.6±0.1
- 5. QUALIFICATION TEST REPORT:501-57197

VOID POS. NO.	A	B	POSITION NUMBER	PART NUMBER
	80.00	78.00	80	8- -0
OBSOLETE	78.00	76.00	78	7- -8
OBSOLETE	76.00	74.00	76	7- -6
OBSOLETE	74.00	72.00	74	7- -4
OBSOLETE	72.00	70.00	72	7- -2
OBSOLETE	70.00	68.00	70	7- -0
OBSOLETE	68.00	66.00	68	6- -8
OBSOLETE	66.00	64.00	66	6- -6
OBSOLETE	64.00	62.00	64	6- -4
OBSOLETE	62.00	60.00	62	6- -2
OBSOLETE	60.00	58.00	60	6- -0
OBSOLETE	58.00	56.00	58	5- -8
OBSOLETE	56.00	54.00	56	5- -6
OBSOLETE	54.00	52.00	54	5- -4
OBSOLETE	52.00	50.00	52	5- -2
	50.00	48.00	50	5- -0
	48.00	46.00	48	4- -8
	46.00	44.00	46	4- -6
OBSOLETE	44.00	42.00	44	4- -4
	42.00	40.00	42	4- -2
OBSOLETE	40.00	38.00	40	4- -0
OBSOLETE	40.00	38.00	40	3- -8
	38.00	36.00	38	3- -6
	36.00	34.00	36	3- -4
	34.00	32.00	34	3- -2
	32.00	30.00	32	3- -0
	30.00	28.00	30	3- -8
	28.00	26.00	28	2- -6
	26.00	24.00	26	2- -4
	24.00	22.00	24	2- -2
	22.00	20.00	22	2- -0
OBSOLETE	20.00	18.00	20	2- -8
	18.00	16.00	18	1- -6
	16.00	14.00	16	1- -4
	14.00	12.00	14	1- -2
	12.00	10.00	12	1- -0
OBSOLETE	10.00	8.00	10	1- -8
OBSOLETE	8.00	6.00	8	1- -6
	6.00	4.00	6	1- -4
	4.00	2.00	4	1734507-4

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG: 27JUN2007
 CHK: 27JUN2007
 S: SLDU
 APPD: WAJ/KE 27JUN2007
 NAME: 108-57197
 APPLICATION SPEC: -
 WEIGHT: -
 FINISH: 2

TE Connectivity
 AMPMODU, 2.0mm PITCH, POST HDR,
 RIGHT ANGLE, MOUNT TYPE

SIZE: A2 CASE CODE: 00779 DRAWING NO: 1734507 RESTRICTED TO: -
 CUSTOMER DRAWING SCALE: 1:1 SHEET: 1 of 2 REV: B1

4

3



2

1



THIS DRAWING IS UNCLASSIFIED. RELEASED FOR PUBLICATION JUN 2007. ALL RIGHTS RESERVED. © COPYRIGHT 2007 BY...

LOC		DIBT		REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD	DATE	BY
-	-	SEE SHEET 1	-	-	-	-	-


HEADER(P=2.00) R/A DUAL ROW SERIES(1.50)




BUSINESS ESTABLISHMENT LABEL
LABEL
BAG 150mm(L)X120mm(W)



INNER CARTON 218mm(L)X185mm(L)X80mm(L)
8 BAG / INNER CARTON



OUTER CARTON 392mm(L)X245mm(L)X245mm(L)
6 INNER CARTON / CARTON



4.887	3.505	30	8	6	1440	80	8	-0
OBSOLETE	4.779	3.417	30	8	6	1440	78	7
OBSOLETE	4.742	3.330	30	8	6	1440	76	7
OBSOLETE	4.624	3.242	30	8	6	1440	74	7
OBSOLETE	4.536	3.154	30	8	6	1440	72	7
OBSOLETE	5.471	4.089	40	8	6	1920	70	7
OBSOLETE	5.354	3.972	40	8	6	1920	68	6
OBSOLETE	5.237	3.855	40	8	6	1920	66	6
OBSOLETE	5.121	3.739	40	8	6	1920	64	6
OBSOLETE	5.004	3.622	40	8	6	1920	62	6
OBSOLETE	4.887	3.505	40	8	6	1920	60	6
OBSOLETE	4.779	3.398	40	8	6	1920	58	6
OBSOLETE	5.062	3.680	45	8	6	2160	56	5
OBSOLETE	4.931	3.549	45	8	6	2160	54	5
OBSOLETE	4.779	3.417	45	8	6	2160	52	5
5.033	3.651	50	8	6	2400	50	5	-0
4.887	3.505	50	8	6	2400	48	4	-8
4.741	3.359	50	8	6	2400	46	4	-6
OBSOLETE	4.595	3.213	50	8	6	2400	44	4
OBSOLETE	4.449	3.067	50	8	6	2400	42	4
OBSOLETE	6.955	4.673	80	8	6	3840	40	4
OBSOLETE	5.978	4.596	80	8	6	3840	39	3
5.821	4.439	80	8	6	3840	38	3	-8
5.588	4.206	80	8	6	3840	36	3	-6
5.354	3.972	80	8	6	3840	34	3	-4
5.121	3.739	80	8	6	3840	32	3	-2
5.763	4.381	100	8	6	4800	30	3	-0
5.471	4.089	100	8	6	4800	28	2	-8
5.179	3.797	100	8	6	4800	26	2	-6
6.639	5.257	150	8	6	7200	24	2	-4
6.201	4.819	150	8	6	7200	22	2	-2
OBSOLETE	5.767	4.385	150	8	6	7200	20	2
6.639	5.257	200	8	6	9600	18	1	-8
6.955	4.673	200	8	6	9600	16	1	-6
6.493	5.111	250	8	6	12000	14	1	-4
6.638	5.256	300	8	6	14400	12	1	-2
OBSOLETE	5.763	4.381	300	8	6	14400	10	1
OBSOLETE	4.887	3.505	300	8	6	14400	8	1
OBSOLETE	4.887	3.505	400	8	6	19200	6	1
4.302	2.920	500	8	6	24000	4	1	1734507-4
GROSS WEIGHT(Kg)	NET WEIGHT (Kg)	PCS/BAG	BAG/INNER CARTON	INNER CARTON / CARTON	QUANTITY	ALL OF POSTS	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE: 27JUN2007
 CHK: S.JHU
 S: S.JHU
 NAME: W.J.KE
 PRODUCT SPEC: SEE SHEET 1
 APPLICATION SPEC: -
 WEIGHT: -
 CUSTOMER DRAWING

TE Connectivity
 AMPMODU, 2.0mm PITCH, POST HDR, RIGHT ANGLE, MOUNT TYPE

SIZE: A2
 CASE CODE: 00779
 DRAWING NO: C=1734507

RESTRICTED TO: -
 SCALE: 1:1
 SHEET: 2 of 2
 REV: B1

1734507

A