

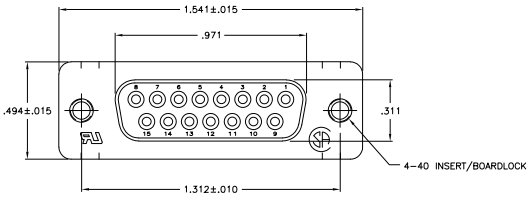


REV. NO.		DESCRIPTION	DATE	BY	APP'D
00	GP				
A1		REVISED PER ECO-06-004912	17/02/06	JDP	SLB

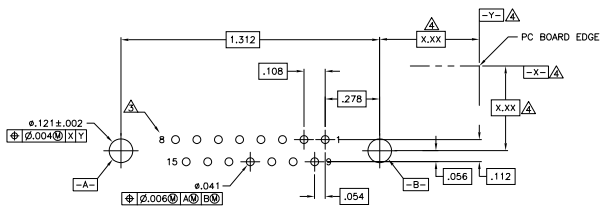

- △ HOUSING: FLAME RETARDANT THERMOPLASTIC, 94V-0 RATED, COLOR BLACK.
- SHELL: CARBON STEEL.
- CONTACTS: PHOSPHOR BRONZE.
- INSERT/BOARDLOCKS: BRASS.
- △ SHELL: 0.00508[.000200] MIN TIN OVER 0.00254[.000100] MIN COPPER.
- CONTACTS: 0.00076[.000030] MIN GOLD ON MATING END, 0.00254[.000100] MIN TIN ON SOLDER END, ALL OVER 0.00076[.000030] MIN NICKEL ON ENTIRE CONTACT.
- INSERT/BOARDLOCKS: 0.00381[.000150] MIN TIN OVER 0.00254[.000100] MIN COPPER.
- △ POSITION NUMBERS SHOWN FOR REFERENCE ONLY.
- △ DATUMS AND BASIC DIMENSIONS TO BE ESTABLISHED BY CUSTOMER.

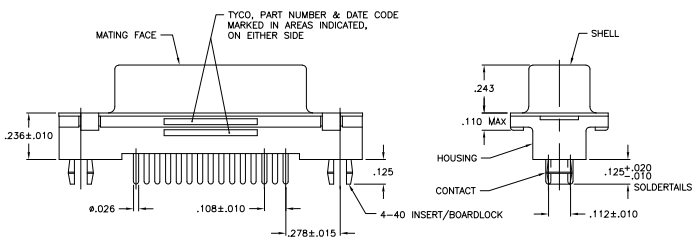

RECOMMENDED PC BOARD LAYOUT  
 .062 PC BOARD  
 (VIEWED FROM CONNECTOR SIDE)

2-5747707-0  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DESIGNER	DATE	REVISION	BY	APP'D
DESIGNER	DATE	DESIGNER	DATE	REVISION	BY	APP'D
108-40025	114-40023	M. MULLENBERRY	108-40025	114-40023		
CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING