

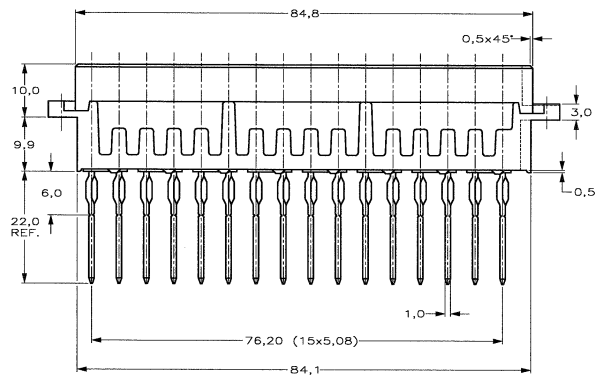


DO NOT SCALE
DIMENSIONS IN mm

METRIC

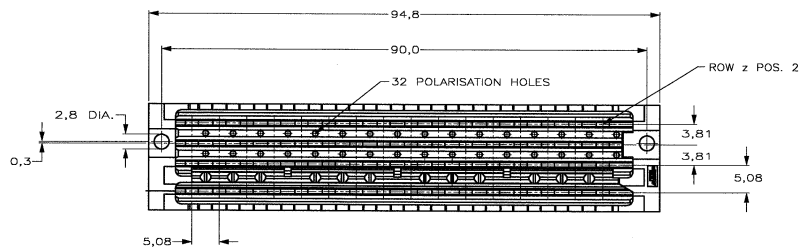

NOTES:

- ⚠ MATERIAL:
-HOUSING: G.F. THERMOPL. POLYESTER 94-V0.
COLOUR: GREY
-CONTACTS: PHOSPHORBRONZE
- ⚠ PLATING CONTACT:
2- -1: 1,25 μm Au OVER 1,25 μm Ni AT CONTACTS SIDE,
Sn/Pb OVER 1,25 μm Ni AT BOARD SIDE.
2- -4: 0,8 μm Au OVER 1,25 μm Ni AT CONTACTS SIDE,
Sn/Pb OVER 1,25 μm Ni AT BOARD SIDE.
2- -8: 0,4 μm Au OVER 1,25 μm Ni AT CONTACTS SIDE,
Sn/Pb OVER 1,25 μm Ni AT BOARD SIDE.
- ⚠ FOR P.C.B.-THICKNESS 2,4-3,2.

P.C.B. HOLE DIM. ACTION PIN	
DRILLED HOLE	1,75 ±0,025 mm
FIN. HOLE	1,54 to 1,69 mm
AFTER REFLOW	1,51 to 1,69 mm
Cu-thks	0,025 to 0,075 mm
SnPb-thks	0,004 to 0,012 mm

⚠ EXTENDED ENDS OF POSTS ALREADY BROKEN OFF.

ROW	Z	D	P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	
5.0.5	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

AN ASTERISK „X” DENOTES A CONTACT.

SEE NOTE	SEE NOTE	FINISH	MATERIAL	PARTNUMBER
⚠	⚠			2-216263-B
				2-216263-4
				2-216263-1

CUSTOMER DRAWING				FOR REFERENCE ONLY WILL NOT BE UPDATED			
© COPYRIGHT 19 -- BY AMP HOLLAND B.V.							
ALL INTERNATIONAL RIGHTS RESERVED AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.							
THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION							
AMP				AMP HOLLAND B.V. Hertogenbosch, The Netherlands.			
A EH-1004-98 T.K. A.M. 12.02.99				NAME 4x16 POS. FEMALE CONNECTOR TYPE G, WITH B.T.B. ACTION-PIN PER DIN. 41612.			
O H-10015 R.D. JVG 21-08-92				REV/LTR			
LTR REVISION RECORD DR. CHK. DATE				SHEET 1 of 1			
DR.: R.DAMEN DATE: 21-07-92				APP.: L.V.SOEST. DATE:			
CHK.: J.V.GRUNSVEN DATE:				DWG. No. C-216263			
DATE: 21-07-92				REV/LTR A			
DATE:				SHEET 1 of 1			

11 10 9 8 7 6 5 4 3 2 1