

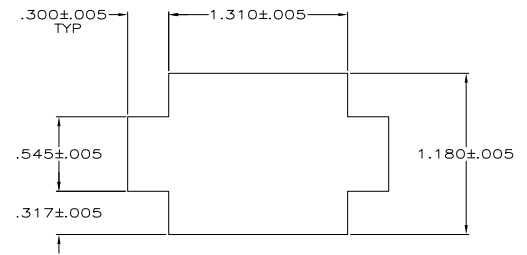



THE DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 ALL RIGHTS RESERVED.

REV	DATE	BY	APPD	DESCRIPTION
0				
1	11MAR11	RK	HMR	REVISED PER ECO-11-004917



RECOMMENDED PANEL CUT-OUT
 PANEL THICKNESS .040-.093



1. ACCEPTS TERMINALS 350650 & 350651.
 2. MATES WITH HOUSING 643267.
 3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- ⚠ CHARACTERS 3 & 4 MARKED ON NEAR SURFACE AS SHOWN;
 CHARACTERS 1 & 2 MARKED OPPOSITE SIDE.

OBSOLETE	⚠	641685-2
		641685-1
CIRCUIT IDENTIFICATION		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN S. WELDON	04 OCT 99	TE Connectivity	
DIMENSIONS:		DR R. BUCHTER	03OCT99	PLUG, HIGH CURRENT	
MM	TO TERMINALS UNLESS OTHERWISE SPECIFIED:	APPD R. BUCHTER	03OCT99	4 CIRCUIT	
Ø	1 P/C ± .005	PRODUCT SPEC		SIZE	A2
	2 P/C ± .005	APPLICATION SPEC		CAGE CODE	00779
	3 P/C ± .015	FINISH		DRAWING NO	641685
	4 P/C ± .005	WEIGHT		RESTRICTED TO	
MATERIAL	NYLON, 94 V-0 RATED	ANGLER		CUSTOMER DRAWING	
COLOR	BRICK RED			SCALE	2:1
				SHEET	1 of 1
				REV	H1

1471-9 (5/11)

641685

A