

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
E2		REVISED PER ECO-11-005027	11MAR11	RK	HMR	

NOTES:

PHYSICAL PROPERTIES:  
 HOUSING MATERIAL: THERMOPLASTIC, PC  
 FLAMABILITY: UL94V-0  
 COLOR: BLACK


TERMINAL:  
 TERMINALS: BRASS, TIN PLATED  
 SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:  
 PITCH: 11.0mm(.433)  
 WIRE RANGE: 14-22 AWG  
 RECOMMENDED TIGHTENING TORQUE: 12IN-LB

ELECTRICAL PROPERTIES:  
 MAX CURRENT: 25A  
 OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:  
 OPERATING TEMP: -40°C TO 120°C

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

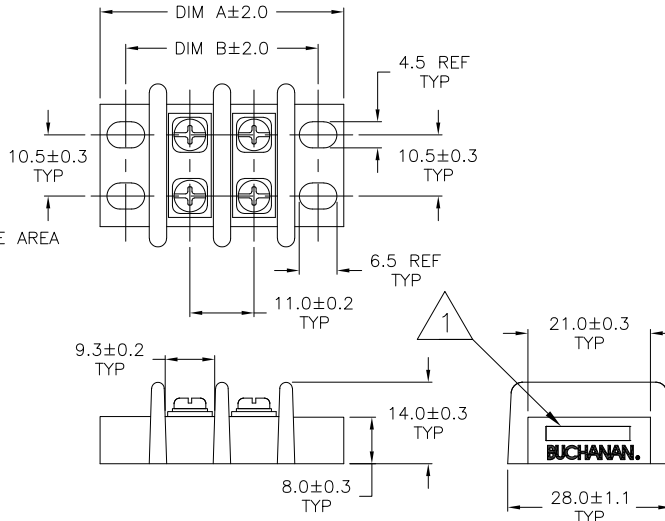

296.1	304.9	26	2-1546477-6
285.1	293.9	25	2-1546477-5
274.1	282.9	24	2-1546477-4
263.1	271.9	23	2-1546477-3
252.1	260.9	22	2-1546477-2
241.1	249.9	21	2-1546477-1
230.1	238.9	20	2-1546477-0
219.1	227.9	19	1-1546477-9
208.1	216.9	18	1-1546477-8
197.1	205.9	17	1-1546477-7
186.1	194.9	16	1-1546477-6
175.1	183.9	15	1-1546477-5
164.1	172.9	14	1-1546477-4
153.1	161.9	13	1-1546477-3
142.1	150.9	12	1-1546477-2
131.1	139.9	11	1-1546477-1
120.1	128.9	10	1-1546477-0
109.1	117.9	09	1546477-9
98.1	106.9	08	1546477-8
87.1	95.9	07	1546477-7
76.1	84.9	06	1546477-6
65.1	73.9	05	1546477-5
54.1	62.9	04	1546477-4
43.1	51.9	03	1546477-3
32.1	40.9	02	1546477-2
DIM B	DIM A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL 22JAN03	TE Connectivity	
DIMENSIONS: mm		CHK C RICHARD 1/22/03	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 2°		APVD C RICHARD 1/22/03	DOUBLE ROW BARRIER STRIP W/ WASHER 11.0mm(.433) SPACING	
MATERIAL FINISH		PRODUCT SPEC APPLICATION SPEC WEIGHT	SIZE A3	RESTRICTED TO
			CAGE CODE 00779	DRAWING NO 1546477
		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 1
			REV E2	