


Glass Passivated Junction Rectifier

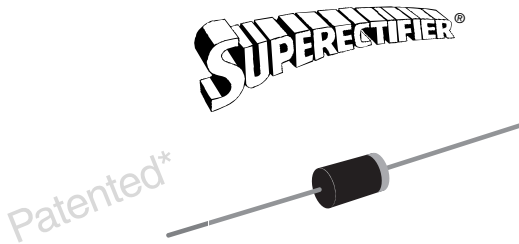

* Glass-plastic encapsulation technique is covered by Patent No. 3,996,602, and brazed-lead assembly by Patent No. 3,930,306

DO-204AC (DO-15)

FEATURES

- Superrectifier structure for high reliability application
- Cavity-free glass-passivated junction
- Low forward voltage drop
- Low leakage current, typical I_R less than 0.1 μA
- High forward surge capability
- Meets environmental standard MIL-S-19500
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



RoHS COMPLIANT

TYPICAL APPLICATIONS

For use in general purpose rectification of power supplies, inverters, converters and freewheeling diodes application

MECHANICAL DATA

Case: DO-204AC, molded epoxy over glass body

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix for consumer grade, meets JESD 201 class 1A whisker test, HE3 suffix for high reliability grade (AEC Q101 qualified), meets JESD 201 class 2 whisker test

Polarity: Color band denotes cathode end

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	1.5 A
V_{RRM}	50 V to 1000 V
I_{FSM}	50 A
I_R	5.0 μA
V_F	1.4 V
T_J max.	175 °C

MAXIMUM RATINGS ($T_A = 25\text{ °C}$ unless otherwise noted) ⁽¹⁾											
PARAMETER	SYMBOL	1N53 91GP	1N53 92GP	1N53 93GP	1N53 94GP	1N53 95GP	1N53 96GP	1N53 97GP	1N53 98GP	1N53 99GP	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	300	400	500	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	350	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	500	600	800	1000	V
Maximum average forward rectified current 0.375" (9.5 mm) lead length at $T_L = 70\text{ °C}$	$I_{F(AV)}$	1.5									A
Peak forward surge current 8.3 ms single half sine-wave super-imposed on rated load	I_{FSM}	50									A
Maximum full load reverse current, full cycle average 0.375" (9.5 mm) lead length at $T_A = 70\text{ °C}$	$I_{R(AV)}$	300									μA
Operating junction and storage temperature range	T_J, T_{STG}	- 65 to + 175									°C

Note:

(1) JEDEC registered values

1N5391GP thru 1N5399GP

Vishay General Semiconductor



ELECTRICAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)													
PARAMETER	TEST CONDITIONS		SYMBOL	1N53 91GP	1N53 92GP	1N53 93GP	1N53 94GP	1N53 95GP	1N53 96GP	1N53 97GP	1N53 98GP	1N53 99GP	UNIT
Maximum instantaneous forward voltage ⁽¹⁾	1.5 A	T _A = 70 °C	V _F	1.4								V	
Maximum DC reverse current at rated DC blocking voltage ⁽¹⁾		T _A = 25 °C T _A = 150 °C	I _R	5.0 300								μA	
Typical reverse recovery time	I _F = 0.5 A, I _R = 1.0 A, I _{rr} = 0.25 A		t _{rr}	2.0								μs	
Typical junction capacitance	4.0 V, 1 MHz		C _J	15								pF	

Note:

(1) JEDEC registered values

THERMAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)												
PARAMETER	SYMBOL	1N53 91GP	1N53 92GP	1N53 93GP	1N53 94GP	1N53 95GP	1N53 96GP	1N53 97GP	1N53 98GP	1N53 99GP	UNIT	
Typical thermal resistance ⁽¹⁾	R _{θJA}	45								°C/W		

Note:

(1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, P.C.B. mounted

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
1N5397GP-E3/54	0.425	54	4000	13" diameter paper tape and reel
1N5397GP-E3/73	0.425	73	2000	Ammo pack packaging
1N5397GPHE3/54 ⁽¹⁾	0.425	54	4000	13" diameter paper tape and reel
1N5397GPHE3/73 ⁽¹⁾	0.425	73	2000	Ammo pack packaging

Note:

(1) Automotive grade AEC Q101 qualified

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

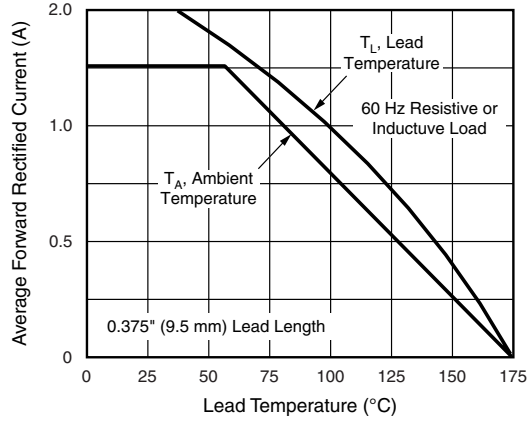


Figure 1. Forward Current Derating Curve

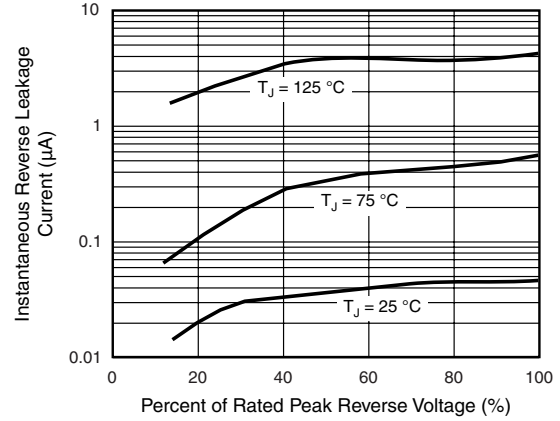


Figure 4. Typical Reverse Characteristics

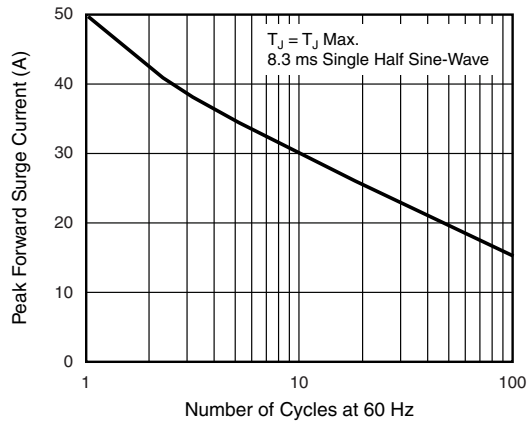


Figure 2. Maximum Non-repetitive Peak Forward Surge Current

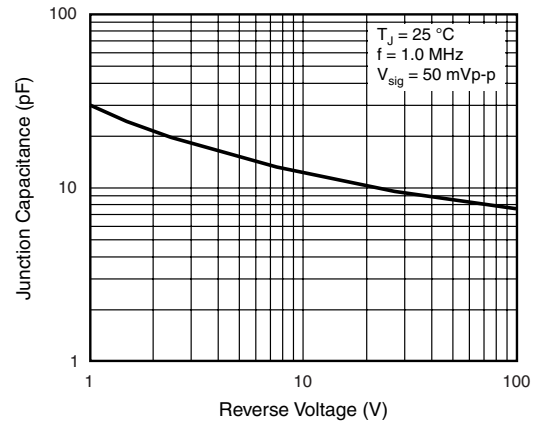


Figure 5. Typical Junction Capacitance

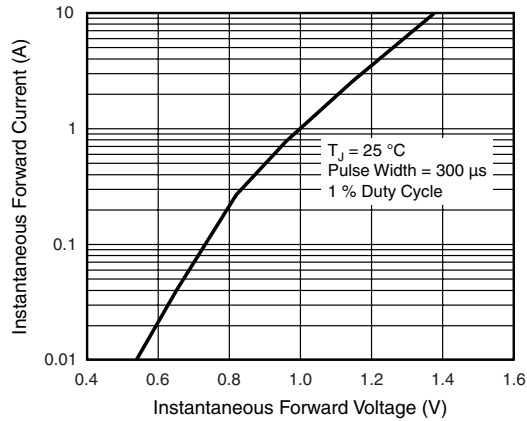


Figure 3. Typical Instantaneous Forward Characteristics


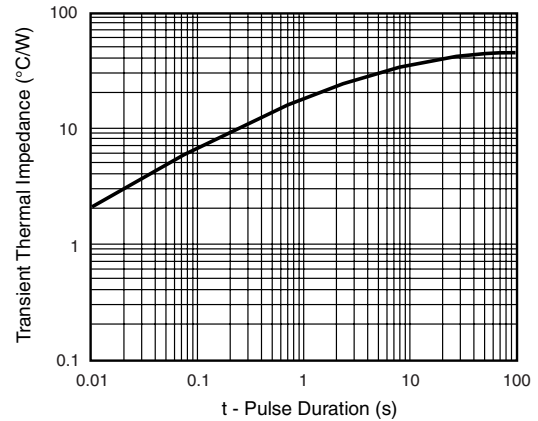


Figure 6. Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-204AC (DO-15)



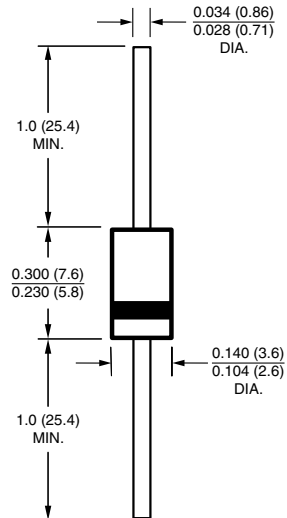

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.