





P-Channel 1.8-V (G-S) MOSFET

PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-12	0.290 @ $V_{GS} = -4.5$ V	± 0.91
	0.435 @ $V_{GS} = -2.5$ V	± 0.74
	0.580 @ $V_{GS} = -1.8$ V	± 0.64



ESD Protected
3000 V



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter	Symbol	5 secs	Steady State	Unit
Drain-Source Voltage	V_{DS}	-12		V
Gate-Source Voltage	V_{GS}	± 8		
Continuous Drain Current ($T_J = 150^\circ\text{C}$) ^a	I_D	$T_A = 25^\circ\text{C}$	± 0.91	A
		$T_A = 70^\circ\text{C}$	± 0.72	
Pulsed Drain Current	I_{DM}	± 3		A
Continuous Diode Current (Diode Conduction) ^a	I_S	-0.28	-0.24	
Maximum Power Dissipation ^a	P_D	$T_A = 25^\circ\text{C}$	0.34	W
		$T_A = 70^\circ\text{C}$	0.22	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$

THERMAL RESISTANCE RATINGS				
Parameter	Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ^a	R_{thJA}	$t \leq 5$ sec	315	$^\circ\text{C/W}$
		Steady State	360	
Maximum Junction-to-Foot (Drain)	R_{thJF}	285	340	

Notes

a. Surface Mounted on 1" x 1" FR4 Board.





SPECIFICATIONS (T_J = 25 °C UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 μA	-0.45			V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±4.5 V			±1	μA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -9.6 V, V _{GS} = 0 V			-1	μA
		V _{DS} = -9.6 V, V _{GS} = 0 V, T _J = 70 °C			-5	
On-State Drain Current ^a	I _{D(on)}	V _{DS} = -5 V, V _{GS} = -4.5 V	-3			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = -4.5 V, I _D = -1 A		0.240	0.290	Ω
		V _{GS} = -2.5 V, I _D = -0.5 A		0.350	0.435	
		V _{GS} = -1.8 V, I _D = -0.3 A		0.480	0.580	
Forward Transconductance ^a	g _{fs}	V _{DS} = -5 V, I _D = -1 A		3.5		S
Diode Forward Voltage ^a	V _{SD}	I _S = -1 A, V _{GS} = 0 V			-1.2	V
Dynamic^b						
Total Gate Charge	Q _g	V _{DS} = -6 V, V _{GS} = -4.5 V, I _D = -1 A		3.2	5	nC
Gate-Source Charge	Q _{gs}			0.69		
Gate-Drain Charge	Q _{gd}			0.61		
Turn-On Delay Time	t _{d(on)}	V _{DD} = -6 V, R _L = 6 Ω I _D ≅ -1 A, V _{GEN} = -4.5 V, R _G = 6 Ω		210	340	ns
Rise Time	t _r			450	720	
Turn-Off Delay Time	t _{d(off)}			910	1550	
Fall Time	t _f			1000	1600	
Source-Drain Reverse Recovery Time	t _{rr}	I _F = -1 A, di/dt = 100 A/μs		540	860	

Notes

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

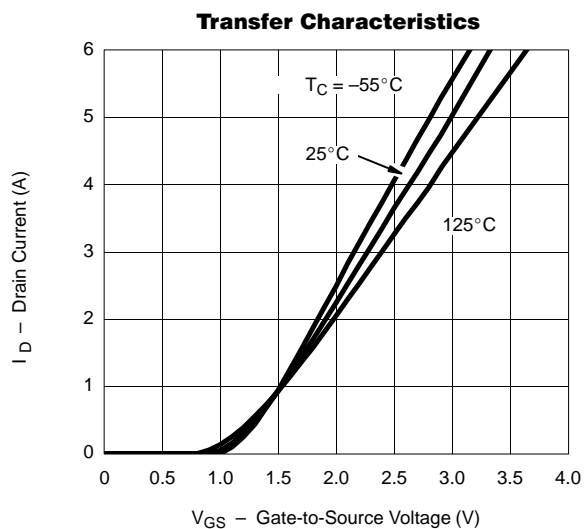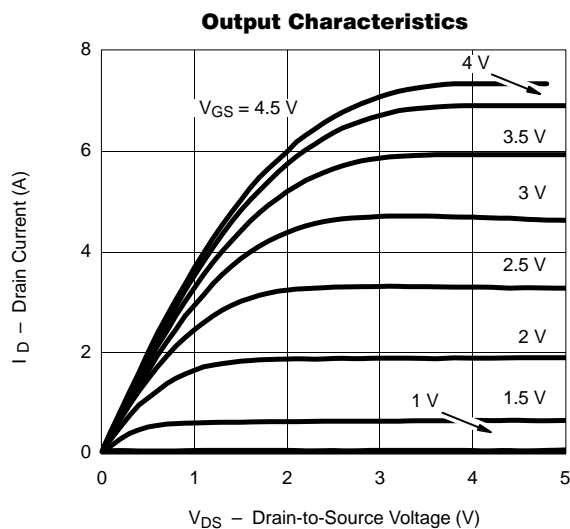




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


On-Resistance vs. Drain Current

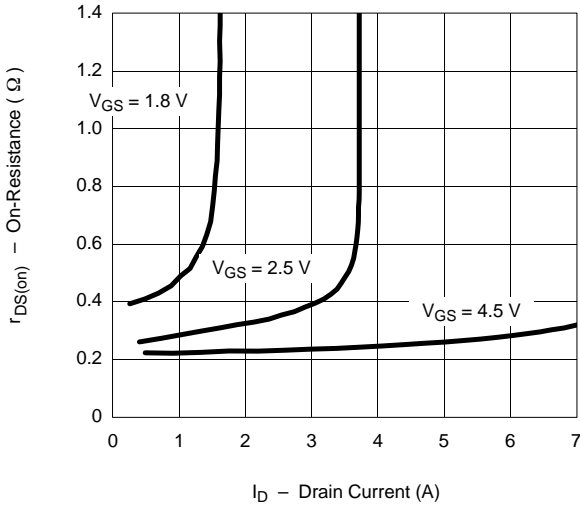


Capacitance

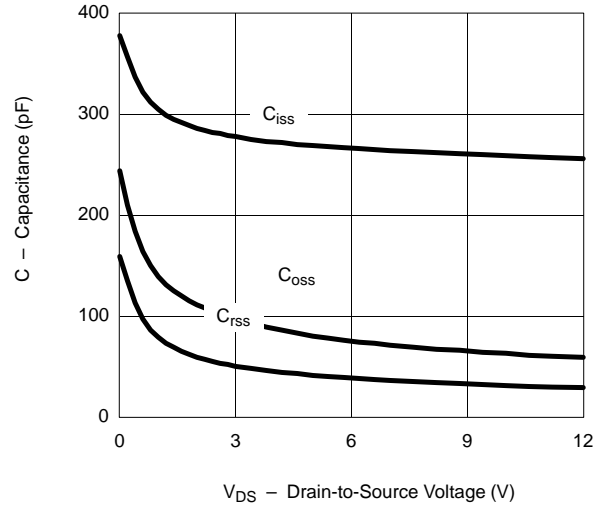


Gate Charge

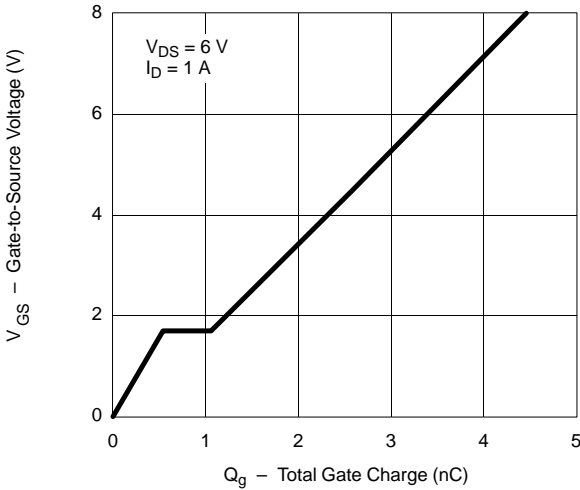


On-Resistance vs. Junction Temperature

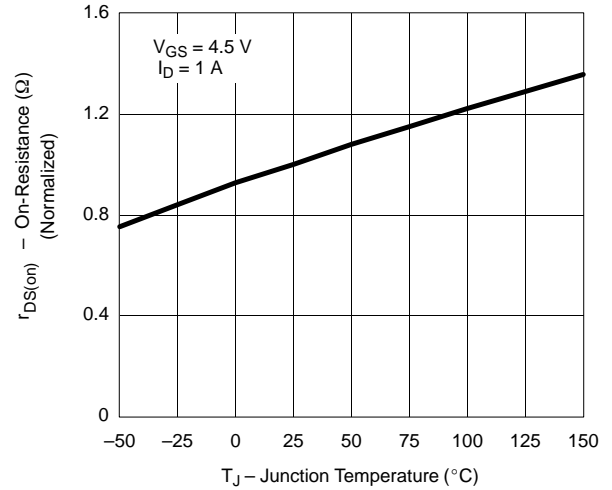

Source-Drain Diode Forward Voltage

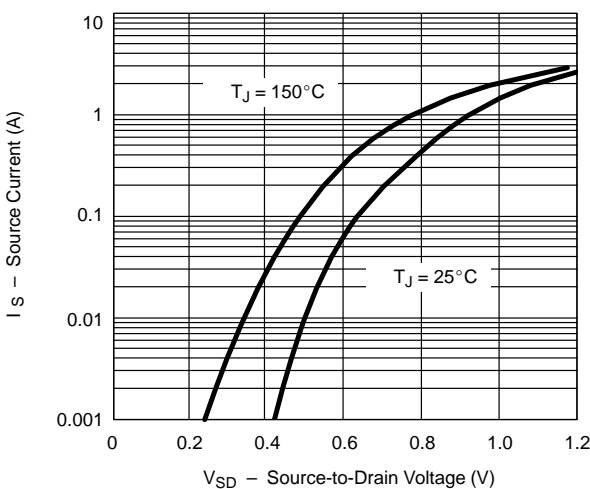


On-Resistance vs. Gate-to-Source Voltage

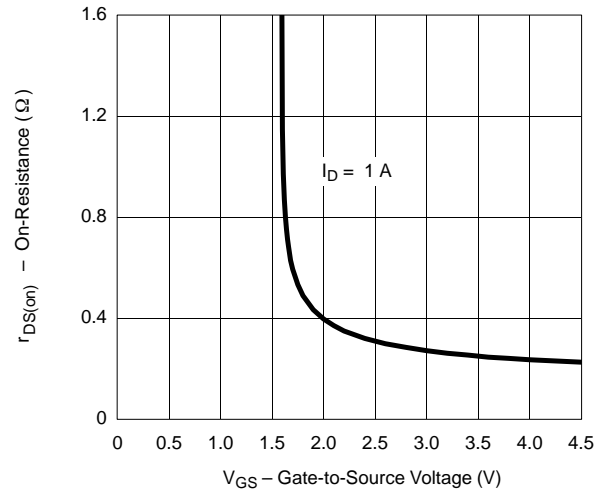




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Gate-Current vs. Gate-Source Voltage

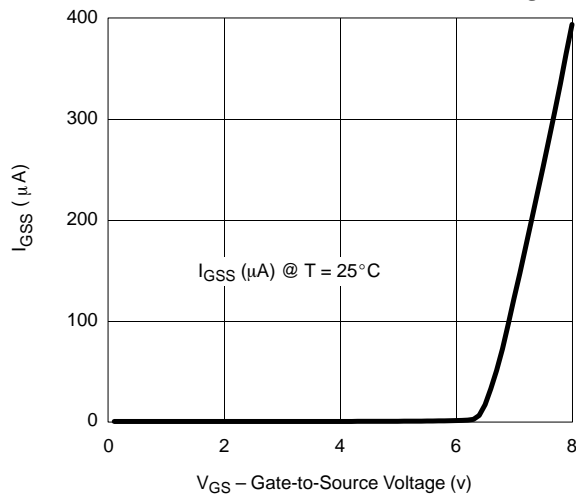


Gate-Source Voltage vs. Gate-Current

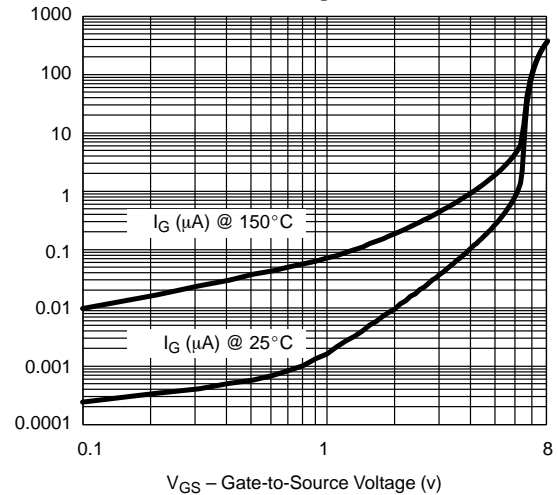


Threshold Voltage

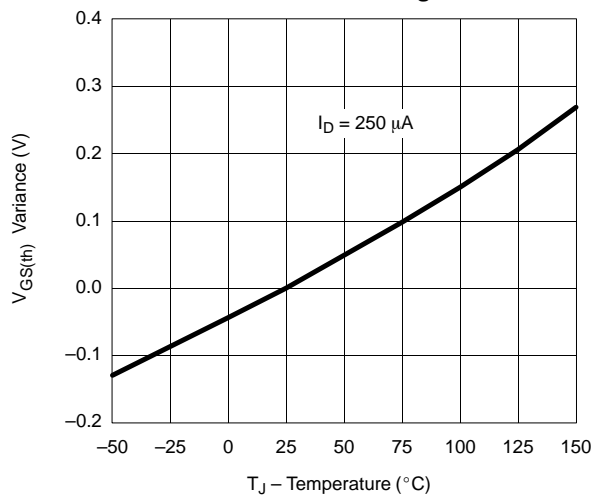

Single Pulse Power

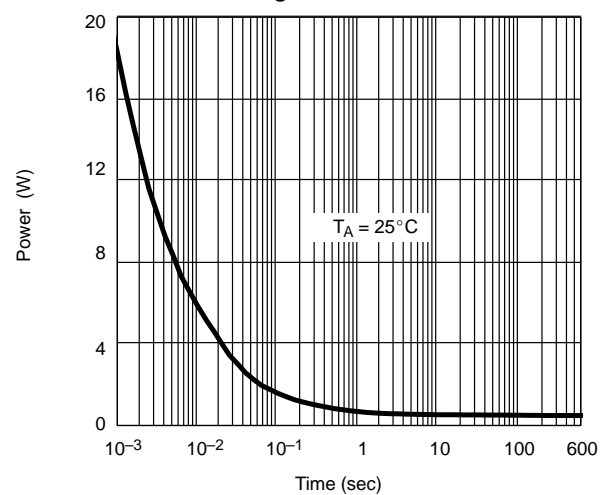


Normalized Thermal Transient Impedance, Junction-to-Ambient

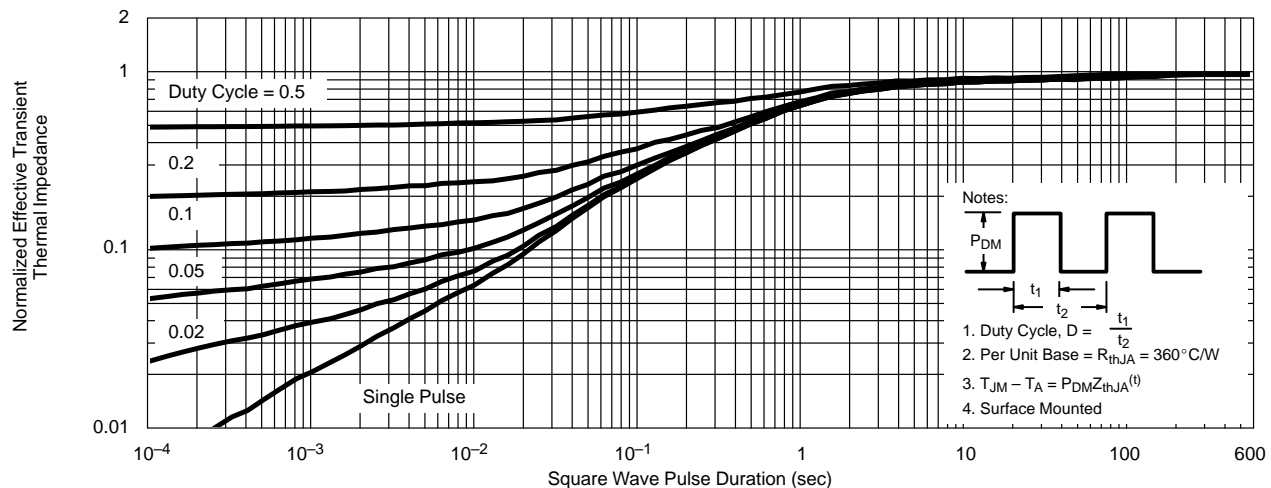



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

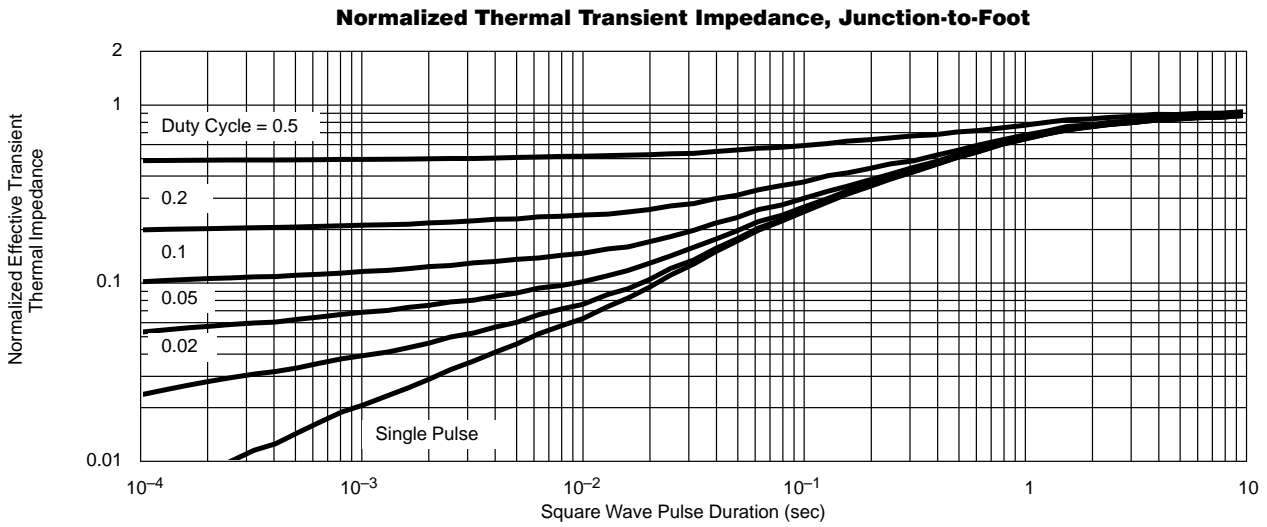



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.