



GSBC856

PNP EPITAXIAL PLANAR TRANSISTOR

Description

The GSBC856 is designed for switching and AF amplifier application, suitable for automatic insertion in thick and thin-film circuits.

Package Dimensions

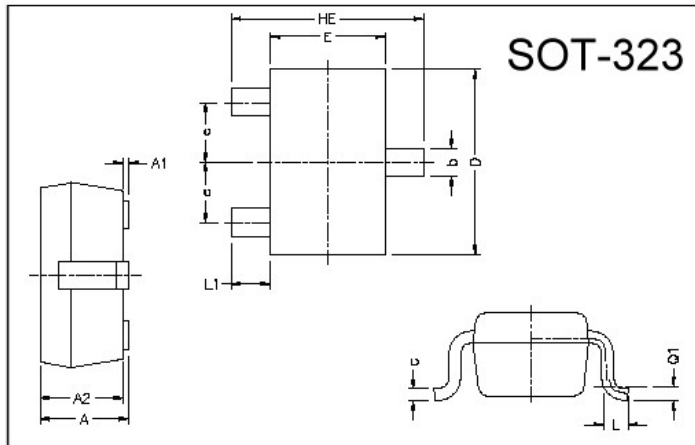

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	0.80	1.10	L1	0.42 REF.	
A1	0	0.10	L	0.15	0.35
A2	0.80	1.00	b	0.25	0.40
D	1.80	2.20	c	0.10	0.25
E	1.15	1.35	e	0.65 REF.	
HE	1.80	2.40	Q1	0.15 BSC.	

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Ratings	Unit
Junction Temperature	Tj	+150	°C
Storage Temperature	Tstg	-55 ~ +150	°C
Collector to Base Voltage	VCBO	-80	V
Collector to Emitter Voltage	VCEO	-65	V
Emitter to Base Voltage	VEBO	-5	V
Collector Current	IC	100	mA
Total Power Dissipation	PD	225	mW







Characteristics at Ta = 25°C

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BVGB0	-80	-	-	V	IC=-100uA
BVGEO	-65	-	-	V	IC=-1mA
BVEBO	-5	-	-	V	IE=-10uA
ICBO	-	-	-15	nA	VCB=-30V
VCE(sat)1	-	-75	-300	mV	IC=-10mA, IB=-0.5mA
VCE(sat)2	-	-250	-650	mV	IC=-100mA, IB=-5mA
VBE(sat)1	-	-700	-	mV	IC=-10mA, IB=-0.5mA
VBE(sat)2	-	-850	-	mV	IC=-100mA, IB=-5mA
VBE(on)1	-600	-	-750	mV	VCE=-5V, IC=-2mA
VBE(on)2	-	-	-820	mV	VCE=-5V, IC=-10mA
hFE	75	-	800		VCE=-5V, IC=-2mA
fT	-	150	-	MHz	VCE=-5V, IC=-10mA, f=100MHz
Cob	-	4.5	-	pF	VCB=-10V, f=1MHz, IE=0A

Classification Of hFE

Rank	9AA	9AB	9AC	Normal
Range	125 - 250	220 - 475	420 - 800	75 - 475

Characteristics Curve

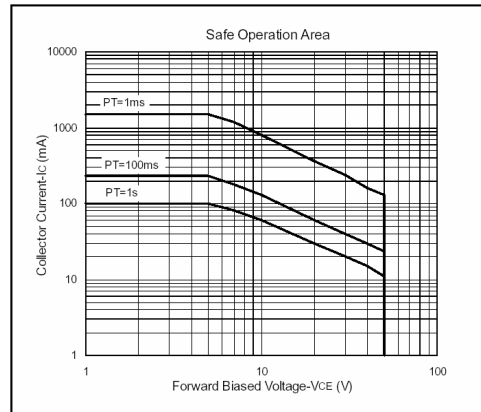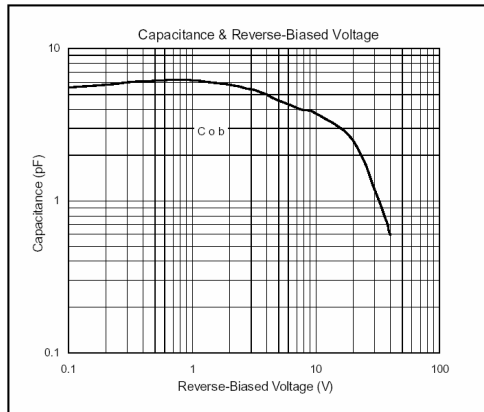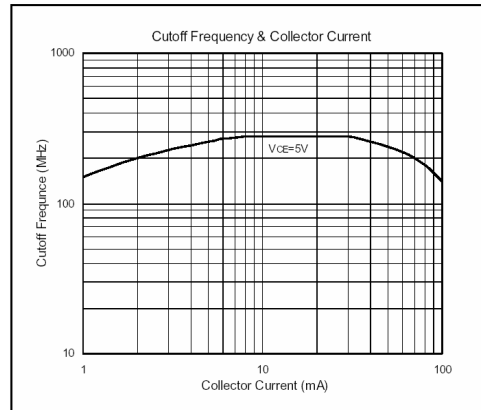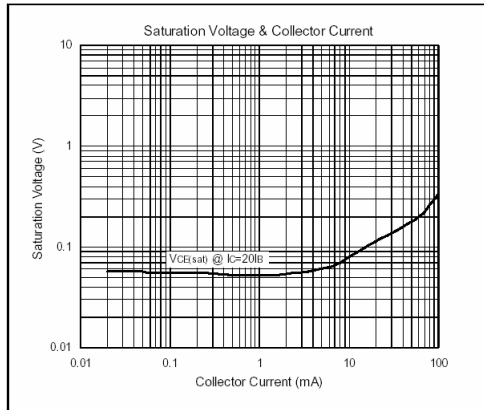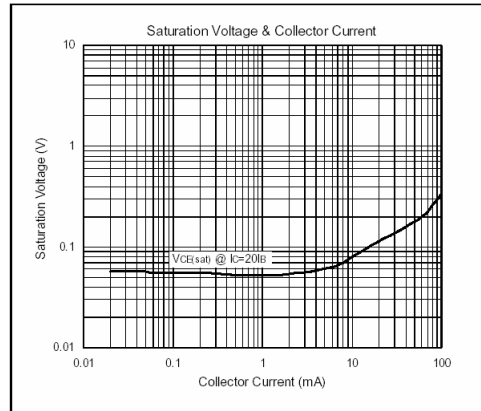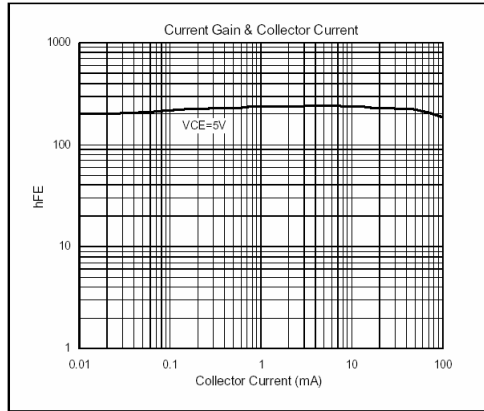

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
 TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
 TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165