

GSBAS16

SURFACE MOUNT, SWITCHING DIODE
VOLTAGE 85V, CURRENT 250mA

Description

The GSBAS16 is designed for high-speed switching application in hybrid thick and thin-film circuits. The device is manufactured by the silicon epitaxial planar process and packed in a plastic surface mount package.

Package Dimensions

SOT-323

Marking :

Circuit :

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	0.80	1.10	L1	0.42 REF.	
A1	0	0.10	L	0.15	0.35
A2	0.80	1.00	b	0.25	0.40
D	1.80	2.20	c	0.10	0.25
E	1.15	1.35	e	0.65 REF.	
HE	1.80	2.40	Q1	0.15 BSC.	

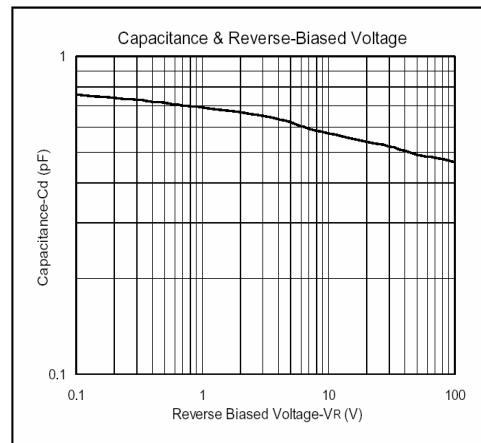
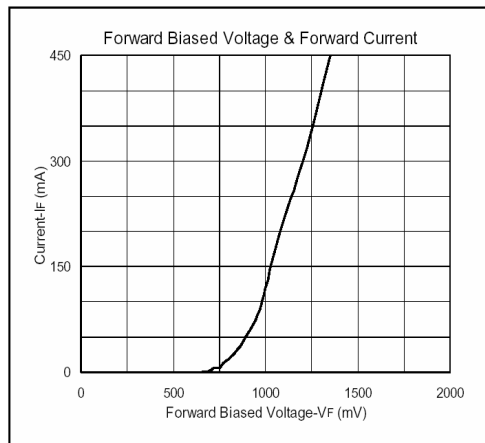
Absolute Maximum Ratings at TA = 25°C

Parameter	Symbol	Ratings	Unit
Junction Temperature	Tj	+150	°C
Storage Temperature	Tstg	-65 ~ +150	°C
Reverse Voltage	VR	85	V
Repetitive Reverse Voltage	VRRM	85	V
Forward Current	Io	250	mA
Repetitive Forward Current	IFM	500	mA
Forward Surge Current (1ms)	IFSM	1000	mA
Total Power Dissipation	Pd	225	mW

Electrical Characteristics (at TA = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit	Test Conditions
Reverse Breakdown Voltage	V(BR)	85	-	V	IR=100uA
Forward Voltage	VF(1)	-	715	mV	IF=1mA
	VF(2)	-	855	mV	IF=10mA
	VF(3)	-	1000	mV	IF=50mA
	VF(4)	-	1250	mV	IF=150mA
Reverse Current	IR	-	1	uA	VR=85V
Total Capacitance	CT	-	2	pF	VR=0, f=1MHz
Reverse Recovery Time	Trr	-	6	nS	IF=IR=10mA, RL=100Ω measured at IR=1mA

Characteristics Curve

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165