


## High Voltage Damper Diodes



### FEATURES

- Glass passivated chip junction
- High breakdown voltage capability
- Very fast reverse recovery time
- Fast forward recovery time
- High efficiency, low switching losses
- Meets MSL level 1, per J-STD-020C, LF maximum peak of 245 °C (for TO-263AB package)
- Solder dip 260 °C, 40 s (for TO-220AC and ITO-220AC package)
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

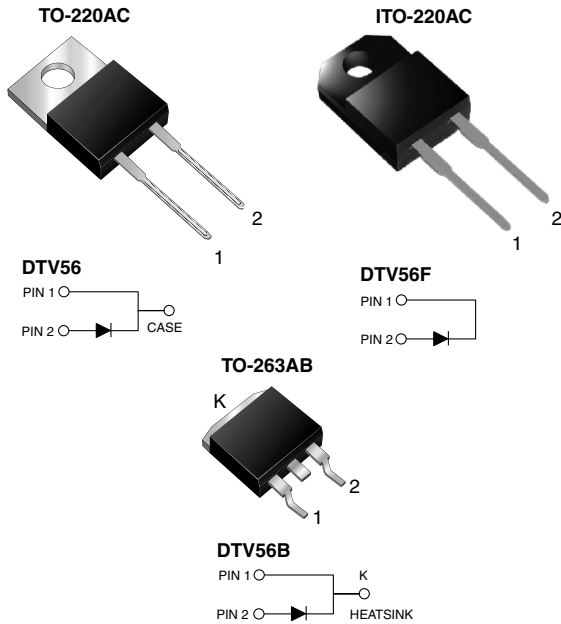

### TYPICAL APPLICATIONS

For use in high resolution display TV and monitor horizontal deflection application.

### MECHANICAL DATA

**Case:** TO-220AC, ITO-220AC, TO-263AB

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, meets JESD 201 class 1A whisker test

**Polarity:** As marked

**Mounting Torque:** 10 in-lbs Maximum

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	10 A
$V_{RRM}$	1500 V
$t_{rr}$	135 ns
$t_{fr}$	350 ns
$V_F$	1.5 V

MAXIMUM RATINGS ( $T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	1500	V
Maximum RMS voltage	$V_{RMS}$	1050	V
Maximum DC blocking voltage	$V_{DC}$	1500	V
Maximum average forward rectified current (Fig. 1)	$I_{F(AV)}$	10	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load at $T_C = 100\text{ }^\circ\text{C}$	$I_{FSM}$	130	A
Operating junction and storage temperature range	$T_J, T_{STG}$	- 55 to + 150	$^\circ\text{C}$
Isolation voltage (ITO-220AC only) from terminal to heatsink $t = 1\text{ min}$	$V_{AC}$	1500	V

<b>ELECTRICAL CHARACTERISTICS</b> ( $T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)					
PARAMETER	TEST CONDITIONS		SYMBOL	VALUE	UNIT
Maximum instantaneous forward voltage <sup>(1)</sup>	$I_F = 6\text{ A}$ $I_F = 6\text{ A}$	$T_J = 25\text{ }^\circ\text{C}$ $T_J = 125\text{ }^\circ\text{C}$	$V_F$	1.8 1.5	V
Maximum DC reverse current at $V_{RRM}$		$T_J = 25\text{ }^\circ\text{C}$ $T_J = 125\text{ }^\circ\text{C}$	$I_R$	100 1.0	$\mu\text{A}$ mA
Maximum reverse recovery time	$I_F = 1.0\text{ A}$ , $dI/dt = 50\text{ A}/\mu\text{s}$ , $V_R = 30\text{ V}$ , $I_{rr} = 0.1 I_{RM}$		$t_{rr}$	135	ns
Typical forward recovery time	$I_F = 6\text{ A}$ , $dI/dt = 48\text{ A}/\mu\text{s}$ , $V_{FR} = 3\text{ V}$		$t_{fr}$	350	ns
Peak forward recovery overshoot voltage	$I_F = 6\text{ A}$ , $dI/dt = 48\text{ A}/\mu\text{s}$	Typical Maximum	$V_{FP}$	10 14	V

**Note:**

(1) Pulse test: 300  $\mu\text{s}$  pulse width, 2 % duty cycle

<b>THERMAL CHARACTERISTICS</b> ( $T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)					
PARAMETER	SYMBOL	DTV56	DTV56B	DTV56F	UNIT
Typical thermal resistance from junction to case	$R_{\theta JC}$	2.0		4.0	$^\circ\text{C}/\text{W}$

<b>ORDERING INFORMATION</b> (Example)					
PACKAGE	PREFERRED P/N	UNIT WEIGHT (g)	PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
TO-220AC	DTV56-E3/45	1.80	45	50/tube	Tube
ITO-220AC	DTV56F-E3/45	1.95	45	50/tube	Tube
TO-263AB	DTV56B-E3/45	1.77	45	50/tube	Tube
TO-263AB	DTV56B-E3/81	1.77	81	800/reel	Tape reel

## RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

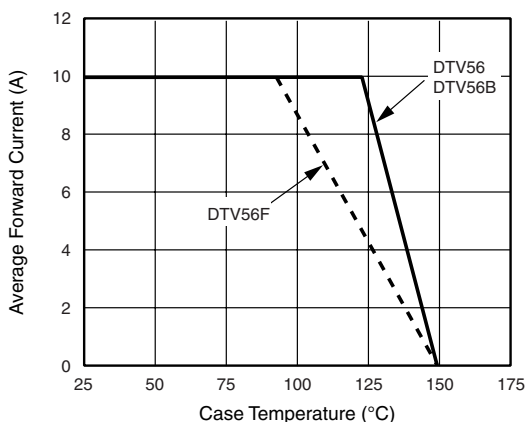


Figure 1. Forward Current Derating Curve

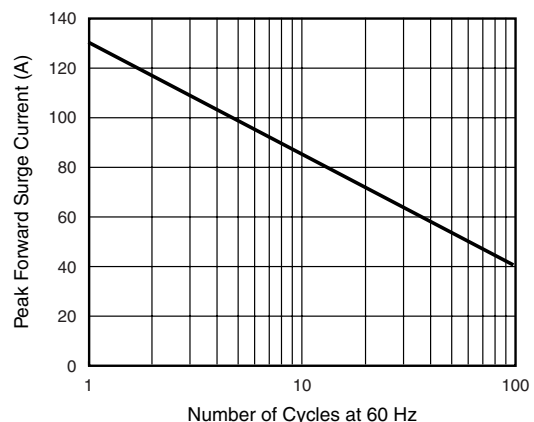


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

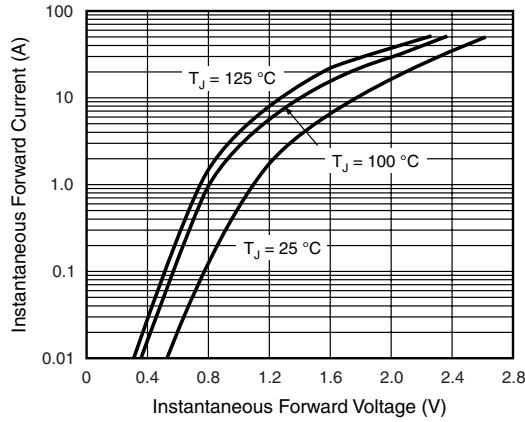


Figure 3. Typical Forward Voltage

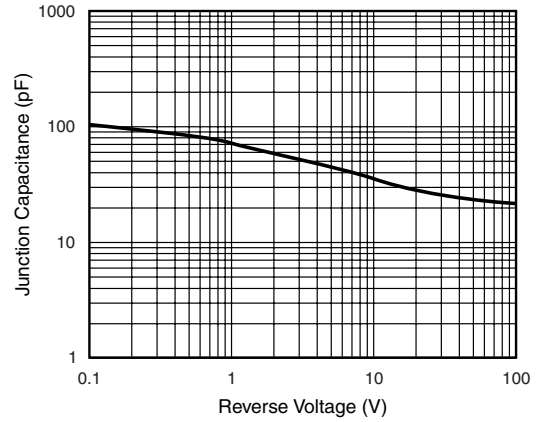


Figure 5. Typical Capacitance

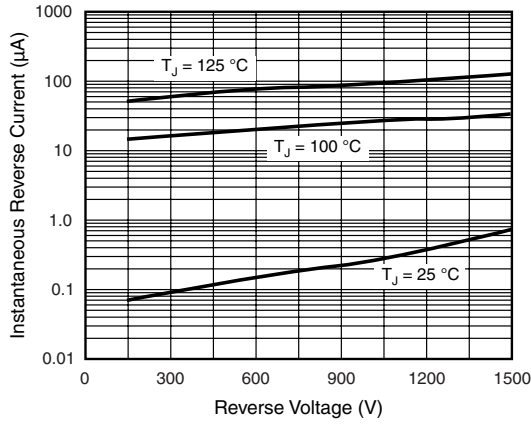


Figure 4. Typical Reverse Current


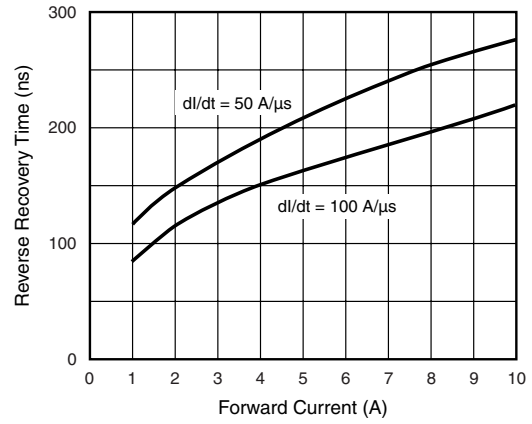



Figure 6. Typical Reverse Recovery Time

### PACKAGE OUTLINE DIMENSIONS in inches (millimeters)


**TO-220AC**

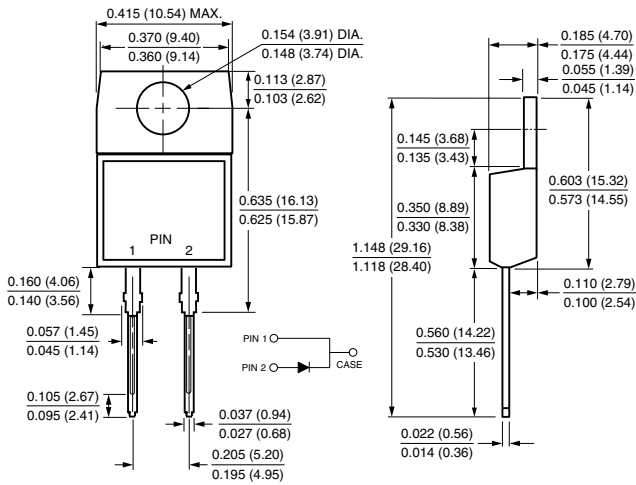


**ITO-220AC**

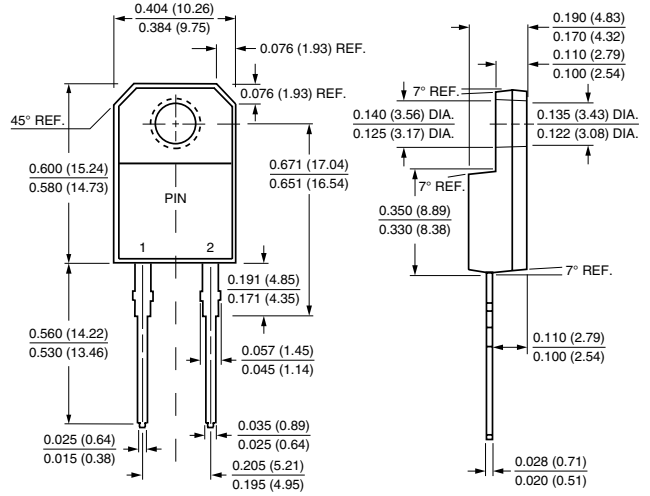

**TO-263AB**

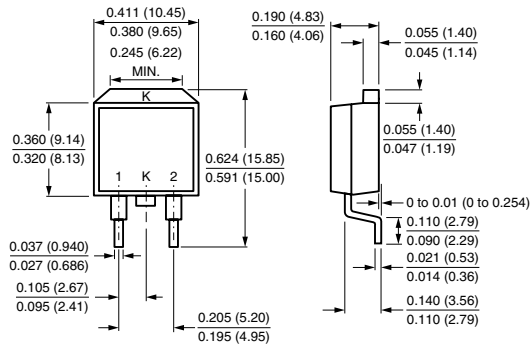

**Mounting Pad Layout**

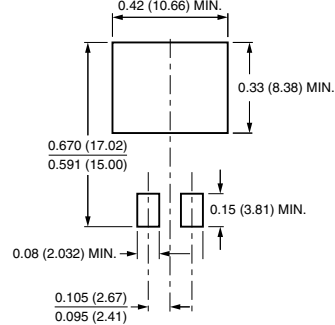



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.