



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

2SB1308
2SB1308-P
2SB1308-Q
2SB1308-R

Features

- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Power dissipation: $P_{CM} = 0.5W(T_{amb}=25^{\circ}C)$
- Collector current: $I_{CM} = -3A$
- Collector-base voltage: $V_{(BR)CBO} = -30V$
- Operating and storage junction temperature range
 $T_J, T_{stg}: -55^{\circ}C$ to $+150^{\circ}C$

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Typ	Max	Unit
V_{CEO}	Collector-Emitter Voltage ($I_C = -50 \mu A, I_E = 0$)	-20	---	---	V
V_{CBO}	Collector-Base Voltage ($I_C = -1mA, I_B = 0$)	-30	---	---	V
V_{EBO}	Emitter-Base Voltage ($I_E = -50 \mu A, I_C = 0$)	-6.0	---	---	V
I_{CBO}	Collector cut-off Current ($V_{CB} = -20V, I_E = 0$)	---	---	-0.5	μA
I_{EBO}	Emitter cut-off Current ($V_{EB} = -5V, I_C = 0$)	---	---	-0.5	μA
h_{FE}	DC current gain ($V_{CE} = -2V, I_C = -0.5A$)	82	---	390	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C = -1.5A, I_B = -0.15A$)	---	---	-0.45	V
f_T	Transition Frequency ($V_{CE} = -6.0Vdc, I_C = -50Adc, f = 30MHz$)	50	---	---	MHz

CLASSIFICATION OF h_{FE}

Rank	P	Q	R
Range	82-180	120-270	180-390
Marking	BFP	BFQ	BFR

PNP
Plastic-Encapsulate
Transistors

SOT-89

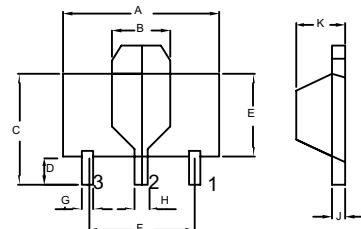

- 1.BASE
 2.COLLECTOR
 3.EMITTER

DIM	DIMENSINS				NOTES
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.173	.181	4.39	4.60	
B	.063	.071	1.60	1.80	
C	.154	.165	3.91	4.19	
D	.031	.039	0.80	1.00	
E	.092	.100	2.34	2.54	
F	.118	----	3.00	----	TYP
G	.013	.019	0.33	0.48	
H	.015	.021	0.38	0.53	
J	.015	.016	0.38	0.41	
K	.055	.063	1.40	1.60	

www.mccsemi.com



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;1Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com