


# ME Series

14 pin DIP, 5.0 Volt, ECL, PECL, Clock Oscillator



## ME Series ECL/PECL Clock Oscillators, 10 KH Compatible with Optional Complementary Outputs

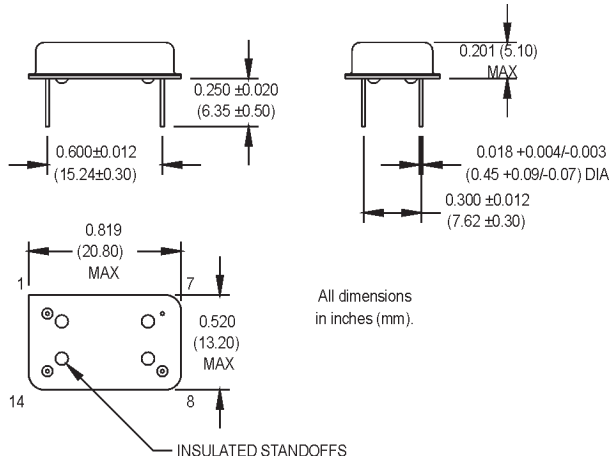

### Pin Connections

PIN	FUNCTION(S) (Model Dependent)
1	N/C, Output #2
7	-Vee, Ground
8	Output #1
14	+Vcc

### Ordering Information

	ME	1	3	X	A	D	-R	00.0000	MHz
Product Series									
Temperature Range									
1: 0°C to +70°C									
2: -40°C to +85°C									
5: -10°to +85°C									
6: -20°C to +70°C									
7: 0°C to +85°C									
Stability									
1: ±1000 ppm									
2: ±500 ppm									
3: ±100 ppm									
4: ±50 ppm									
6: ±25 ppm									
*8: ±20 ppm									
Output Type									
X: Single Output									
Z: Dual Output									
Symmetry/Logic Compatibility									
A: 40/60 (std.)									
B: 45/55									
Package/Lead Configurations									
A: DIP; Gold Flash Header									
D: DIP; Nickel Header									
G: Gull Wing; Nickel Header									
X: Gull Wing; Gold Flash Header									
RoHS Compliance									
Blank: non-RoHS compliant part									
-R: RoHS compliant part									
Frequency (customer specified)									

\*Contact factory for availability.

	PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition
Electrical Specifications	Frequency Range	F	19.44		155.52	MHz	
	Frequency Stability	ΔF/F	(See Ordering Information)				
	Operating Temperature	TA	(See Ordering Information)				
	Storage Temperature	TS	-55		+125	°C	
	Input Voltage	Vcc	4.75	5.0	5.25	V	
	Input Current	Iee/Icc		35	60	mA	
	Symmetry (Duty Cycle)		(See Ordering Information)				Vcc -1.3 V level
	Load		130 Ω to Vcc -2V or Thevenin Equivalent				See Note 1
	Rise/Fall Time	Tr/Tf			2.5	ns	See Note 2
	Logic "1" Level	Voh	Vcc -0.98			V	
	Logic "0" Level	Vol			Vcc -1.63	V	
	Cycle to Cycle Jitter			11	25	ps RMS	1 Sigma
Environmental	Mechanical Shock	Per MIL-STD-202, Method 213, Condition C					
	Vibration	Per MIL-STD-202, Method 201 & 204					
	Wave Solder Conditions	+260°C for 10 secs. Max.					
	Hermeticity	Per MIL-STD-202, Method 112 (1 x 10 <sup>-8</sup> atm.cc/s of helium)					
	Solderability	Per EIAJ-STD-002					

1. Internally terminated outputs. See load circuit diagram #4.
2. Rise/Fall times are measured between Vcc -0.98 V and Vcc -1.63 V.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see [www.mtronpti.com](http://www.mtronpti.com) for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.