


塑封超快速整流二极管  
反向电压 100---600V  
正向电流 16A

Plastic Ultra-Fast Recover Rectifier  
Reverse Voltage 100 to 600 V  
Forward Current 16 A

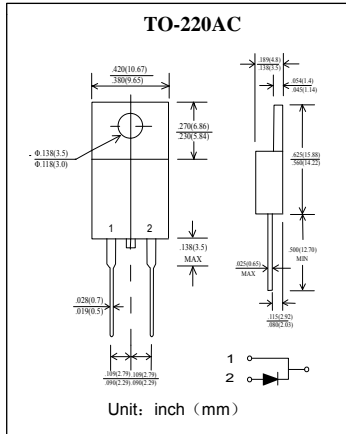

### 特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 低功耗高效率。Low Power Loss, High Efficiency
- 引线 and 管体皆符合RoHS标准。  
Lead and body according with RoHS standard

### 机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded Plastic
- 极性: 标记模压或印于本体 Polarity: Symbols molded or marked on body
- 安装位置: 任意 Mounting Position: Any
- 安装扭矩: 推荐值 0.3牛\*米 Mounting torque: Recommend 0.3 N\*m

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	MUR1610	MUR1620	MUR1640	MUR1660	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	100	200	400	600	V
最大均方根电压 Maximum RMS voltage	$V_{RMS}$	70	140	280	420	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	100	200	400	600	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	16				A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	$I_{FSM}$	150				A
典型热阻 Typical thermal resistance	$R_{\theta JC}$	3.0		2.0		°C/W
工作结温和存储温度 Operating junction and storage temperature range	$T_j, T_{STG}$	-55---+150				°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	MUR1610	MUR1620	MUR1640	MUR1660	单位 Unit
最大正向电压 Maximum forward voltage	$V_F$ $I_F = 16A$	1.00		1.30	1.50	v
最大反向电流 Maximum reverse current	$I_R$ $TA = 25^\circ C$ $TA = 125^\circ C$	10 250				$\mu A$
最大反向恢复时间 MAX. Reverse Recovery Time	$t_{rr}$ $I_F = 0.5A$ $I_R = 1.0A$ $I_{REC} = 0.25A$	35		50		nS

特性曲线 Characteristic Curves

