


T-1 3/4 Bi-Pin Base (.125")

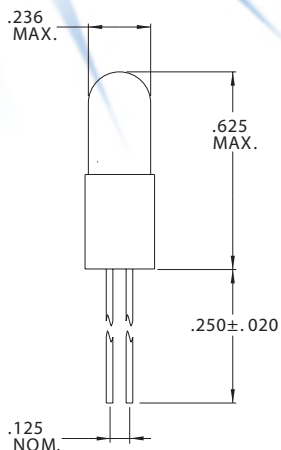

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM2301 | 1.35 | .060 | .020 | 500 | S-2 |
| CM7931 | 1.35 | .060 | .010 | 500 | C-2R |
| CM2302 | 2.50 | .200 | .200 | 500 | C-2R |
| CM7868 | 2.50 | .350 | .210 | 10,000 | C-2R |
| CM7968 | 2.50 | .200 | .200 | 500 | C-2R |
| CM2303 | 2.70 | .060 | .040 | 500 | C-2R |
| CM7838 | 2.70 | .060 | .040 | 6,000 | C-2R |
| CM2304 | 3.00 | .300 | .340 | 1,500 | C-2R |
| CM7375 | 3.00 | .015 | .004 | 10,000 | C-6 |
| CM7847 | 3.00 | .350 | .300 | 10,000 | C-2R |
| CM7359 | 4.50 | .120 | .050 | 25,000 | C-2R |
| CM3149 | 5.00 | .060 | .150 | 5,000 | C-2R |
| CM7360 | 5.00 | .060 | .030 | 60,000 | C-2R |
| CM7361 | 5.00 | .060 | .050 | 25,000 | C-2R |
| CM7362 | 5.00 | .115 | .150 | 40,000 | C-2R |
| CM7363 | 5.00 | .190 | .450 | 1,000 | C-2R |
| CM7366 | 5.00 | .200 | .340 | 15,000 | C-2R |
| CM2305 | 6.00 | .040 | .050 | 1,000 | C-6 |
| CM2306 | 6.00 | .200 | .600 | 1,000 | C-2R |
| CM2323 | 6.00 | .200 | .600 | 1,000 | C-2R |
| CM7328 | 6.00 | .200 | .600 | 1,000 | C-2R |
| CM7364 | 6.00 | .200 | .100 | 50,000 | C-2F |
| CM7945 | 6.00 | .040 | .030 | 10,000 | C-2R |
| CM2307 | 6.30 | .200 | .340 | 5,000 | C-2R |
| CM2319 | 6.30 | .200 | .400 | 2,000 | C-2F |
| CM2334 | 6.30 | .075 | .250 | 1,000 | C-2R |
| CM2337 | 6.30 | .200 | .400 | 20,000 | C-2R |
| CM7349 | 6.30 | .200 | .550 | 5,000 | C-2R |
| CM7368 | 6.30 | .150 | .450 | 3,000 | C-2R |
| CM7377 | 6.30 | .075 | .230 | 1,000 | C-2R |
| CM7380 | 6.30 | .040 | .020 | 20,000 | C-2V |
| CM7381 | 6.30 | .200 | .400 | 20,000 | C-2F |
| CM2308 | 10.0 | .015 | .010 | 5,000 | C-2F |
| CM2309 | 10.0 | .040 | .050 | 5,000 | C-2R |
| CM7344 | 10.0 | .014 | .002 | 50,000 | C-2F |
| CM7367 | 10.0 | .040 | .080 | 5,000 | C-2F |
| CM7369 | 11.0 | .022 | .030 | 10,000 | C-2F |
| CM7174 | 12.0 | .040 | .120 | 5,000 | C-2V |
| CM7371 | 12.0 | .040 | .120 | 10,000 | C-2F |
| CM2310 | 14.0 | .080 | .500 | 750 | C-2F |