



# P600A/P6A05 THRU P600M/P6A10

## 6.0 AMPS. SILICON RECTIFIERS

**Voltage Range**  
50 to 1000 Volts  
**Current**  
6.0 Amperes


### Features

- Plastic material used carries Underwriters Laboratory Classification 94V-0
- High forward current capability
- High surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds/.375"(.9.5mm) lead lengths at 5 lbs.(2.3kg) tension

### Mechanical Data

- Cases: Molded plastic
- Lead: Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.07 ounce, 2.1 grams

R-6

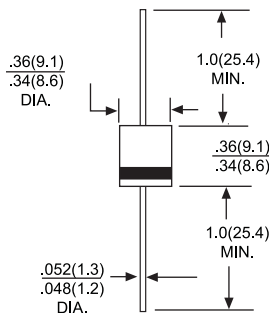

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number		P600A P6A05	P600B P6A1	P600D P6A2	P600G P6A4	P600J P6A6	P600K P6A8	P600M P6A10	UNITS
Maximum Repetitive Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	v
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	v
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	v
Maximum Average Forward Rectified Current at TA = 60°C, 0.375"(9.5mm) Lead Length (Fig 1) TL = 60°C, 0.125"(3.1mm) Lead Length (Fig 2)	IF(AV)	6.0 22.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated LoadM (JEDEC method)	IFSM	400.0							A
Maximum Instantaneous Forward Voltage @6.0A @100A	VF	1.0							V
Maximum DC Reverse Current @ TA = 25°C at Rated DC Blocking Voltage @ TA = 100°C	IR	5.0 1.0							µA mA
Typical Junction Capacitance (Note 1)	CJ	150.0							pF
Typical Reverse Recovery Time (Note 2)	TRR	2.5							µs
Typical Thermal Resistance (Note 3)	RθJA RθJC	20.0 4.0							°C/W
Operating Junction and Storage Temperature Range	TJ, TSTG	-50 to +150							°C

- NOTES: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.  
2. Reverse Recovery Time Conditions: IF=0.5a, IR=1.0a, IRR=0.25a  
3. Thermal Resistance from Junction to Ambient and from Junction to Lead at 0.375"(9.5mm) Lead Length, P.C.B. Mounted with 1.1 x1.1"(30 x30mm) Copper Pads

# RATING AND CHARACTERISTIC CURVES P600A/P6A05 THRU P600M/P6A10



FIG.1-MAXIMUM FORWARD CURRENT DERATING CURVE

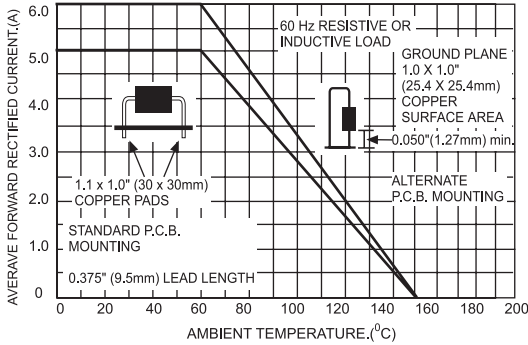


FIG.2-MAXIMUM FORWARD CURRENT DERATING CURVE

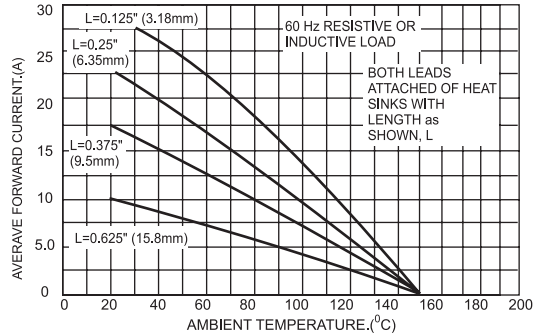


FIG.3-TYPICAL REVERSE CHARACTERISTICS

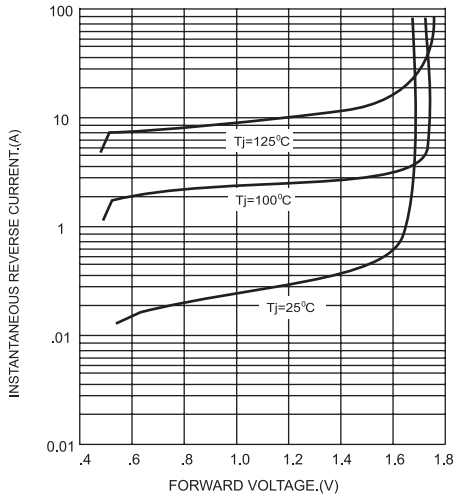


FIG.4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

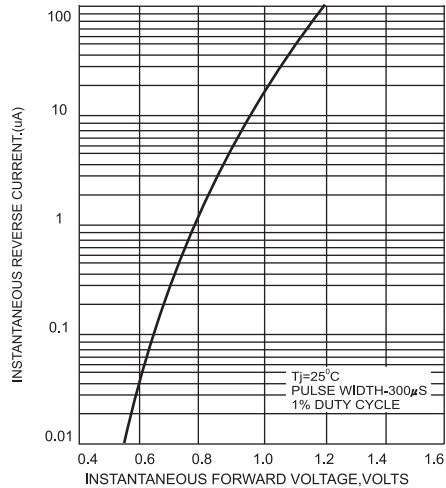


FIG.5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

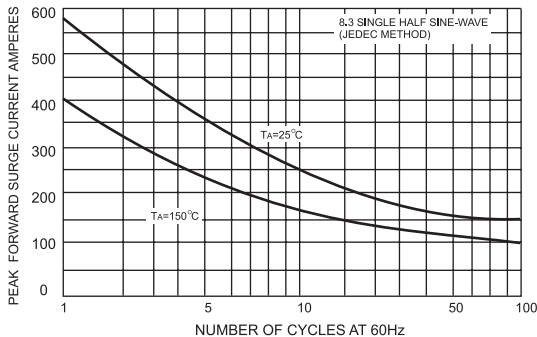


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

