

Applications

- High speed switching and rectification
- Switching mode power supply

Features


- Ultra-fast reverse recovery time: $t_{rr}=30\text{ns}$ Max.
- Small & compact type SMD package
- Low forward voltage & low reverse current
- Low switching loss

Ordering Information

Type No.	Marking	Package Code
SF1A200H	1A2H	SOD-106

Outline Dimensions

unit : mm

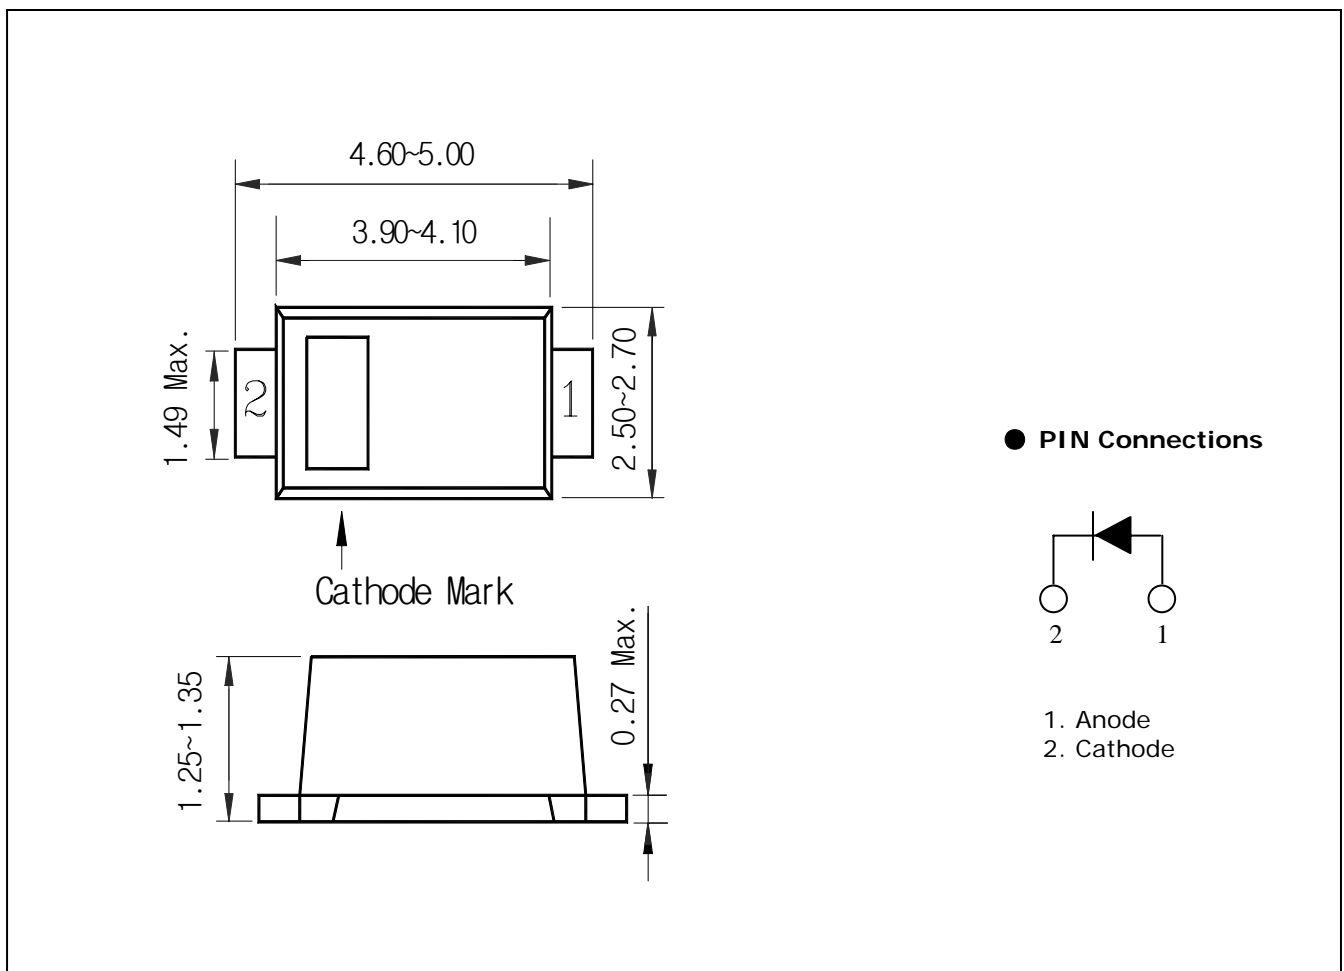

Absolute Maximum Ratings

[Ta=25°C]

Characteristic	Symbol	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}	200	V
Average rectified output current	I_O	1.0	A
Peak forward surge current (Non-repetitive 60Hz sine wave)	I_{FSM}	20	A
Junction temperature	T_J	150	°C
Storage temperature range	T_{stg}	-45 ~ 150	°C

Electrical Characteristics


[Ta=25°C]

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Peak forward voltage	$V_{FM}^{1)}$	$I_F=1A$	-	-	0.98	V
Repetitive peak reverse current	I_{RRM}	$V_R=200V$	-	-	10	μA
Reverse recovery time	t_{rr}	$I_F=0.5A, di/dt=-100A/\mu s$	-	-	30	ns
Thermal resistance	R_{th}	Junction to ambient ²⁾	-	-	76	°C/W

1) Pulse test : $t_p \leq 380 \mu s$, Duty cycle $\leq 2\%$

2) Device mounted on glass epoxy PCB (recommanderable minimum solder land)

※ Recommend PCB solder land [Unit : mm]

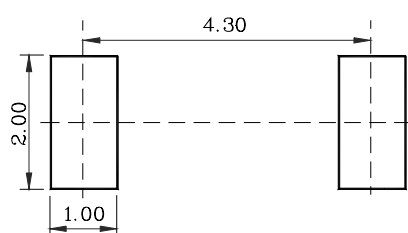

Electrical Characteristic Curves

Fig.1 $I_F - V_F$

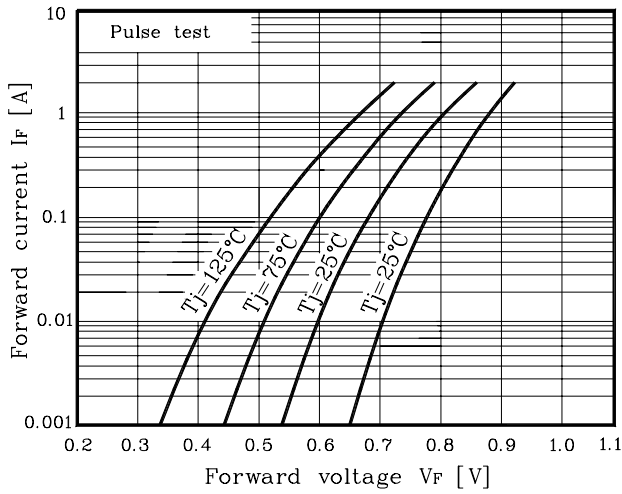


Fig. 2 $I_R - V_R$

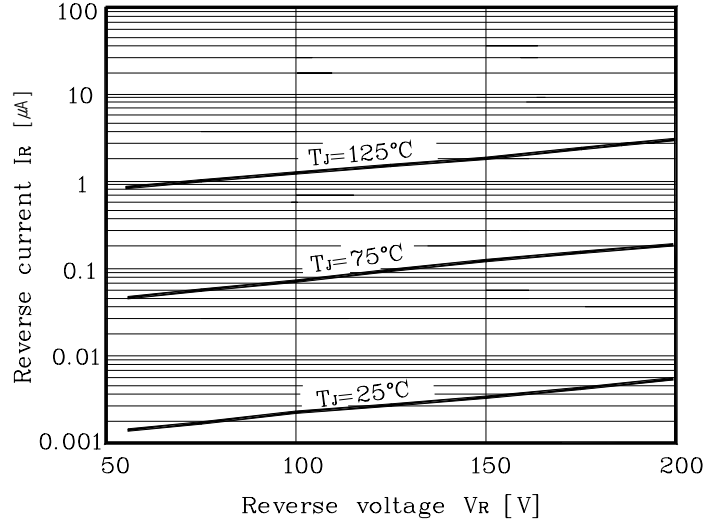


Fig. 3 $P_F - I_O$

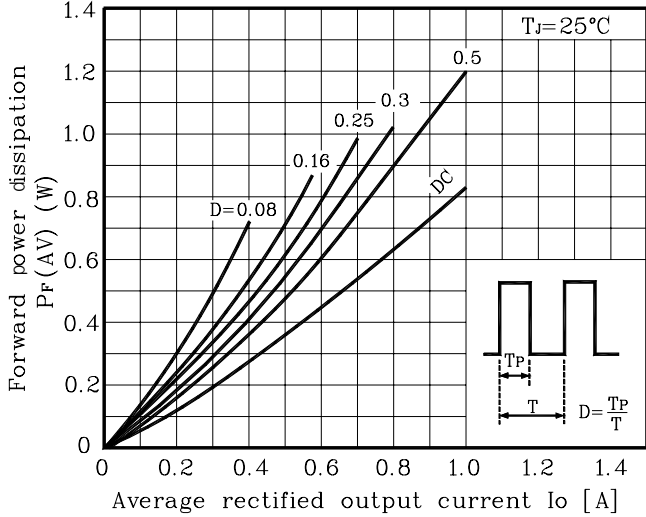


Fig. 4 $C_J - V_R$

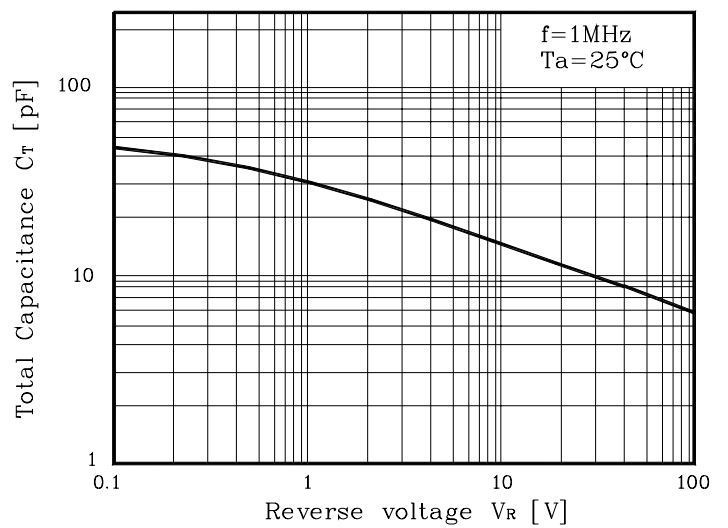


Fig. 5 $I_{FSM} - \text{Number of cycle}$


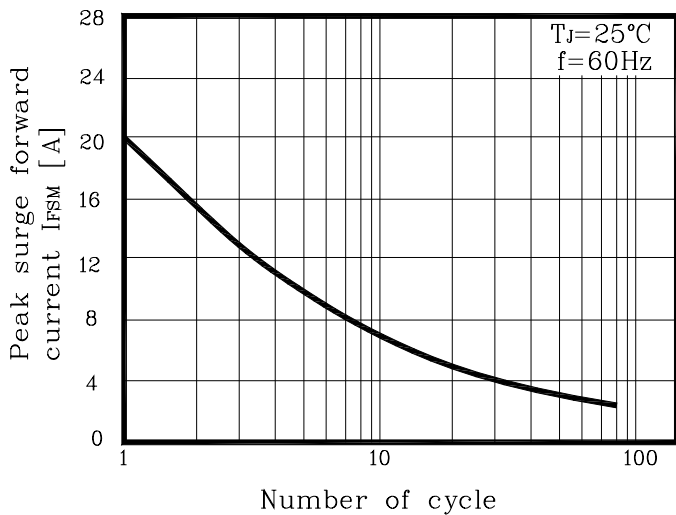


Fig. 6 I_O derating - T_C

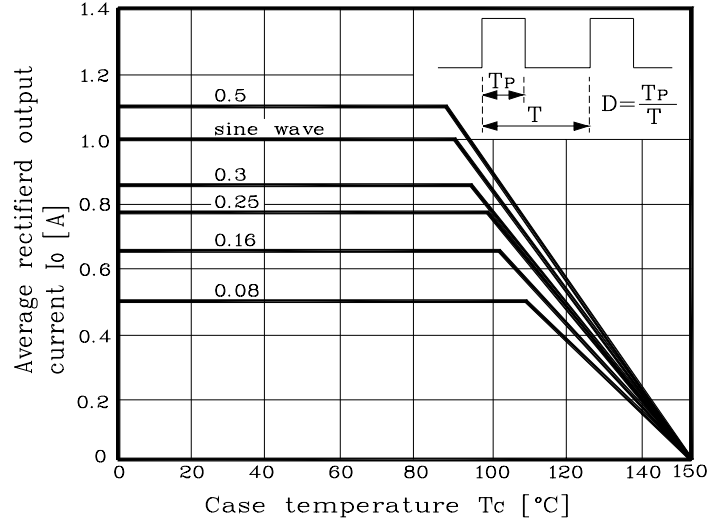

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.