
8mm LED Lamp

FEATURES

· Choice of diffused or tinted clear lens

APPLICATIONS

- Outdoor backlighting
- · Large area backlighting
- · Moving message signs

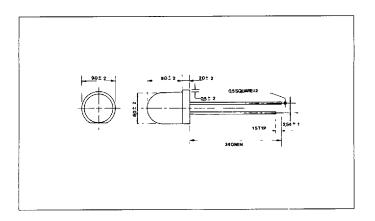

MAXIMUM RATINGS ($Ta = 25^{\circ}C$)

PART NO.	FORWARD CURRENT (I _F) (mA)	REVERSE VOLTAGE (V _R) (V)	POWER DISSIPATION (PD) (mW)	OPERATING TEMPERATURE (Topr) (°C)	STORAGE TEMPERATURE (T _{stg}) (°C)		
MT1498-R	30	3	100	-25~+85	-25~+100		
MT1498-RG	30	5	85	-25~+85	-25~+100		
MT2498-G	30	5	85	-25~+85	-25~+100		
MT3498-Y	30	5	85	-25~+85	-25~+100		
MT4498-O	30	5	85	-25~+85	-25~+100		
MT4498-HR	30	5	85	-25~+85	-25~+100		
MT1198-R	30	3	100	-25~+85	-25~+100		
MT1198-RG	30	5	85	-25~+85	-25~+100		
MT2198-G	30	5	85	-25~+85	-25~+100		
MT3198-Y	30	5	85	-25~+85	-25~+100		
MT4198-O	30	5	85	-25~+85	-25~+100		
MT4198-HR	30	5	85	-25~+85	-25~+100		

OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)


PART NO. MATERIAL		LENS COLOR	VIEWING ANGLE			FORWARD VOLTAGE (V)		REVERSE CURRENT		PEAK WAVELENGTH		
			typ.	min.	typ.	@mA	typ.	max	@mA	μΑ	Vr	nm
MT1498-R	GaAsP/GaAs	Red Clear	32°	1.6	4.1	10	1.7	2.0	20	100	3	655
MT1498-RG	GaP/GaP	Red Clear	32°	2.5	6.1	10	2.1	3.0	20	100	5	700
MT2498-G	GaP/GaP	Green Clear	32°	12.1	36.3	10	2.1	3.0	20	100	5	567
MT3498-Y	GaAsP/GaP	Yellow Clear	32°	9.4	24.8	10	2.1	3.0	20	100	5	585
MT4498-O	GaAsP/GaP	Orange Clear	32°	14	35	10	2.1	3.0	20	100	5	635
MT4498-HR	GaAsP/GaP	Red Clear	32°	14	35	10	2.1	3.0	20	100	5	635
MT1198-R	GaAsP/GaP	Red Diff	40°	.5	1.2	10	1.7	2.0	20	100	3	655
MT1198-RG	GaP/GaP	Red Diff	40°	.7	1.8	10	2.1	3.0	20	100	5	700
MT2198-G	GaP/GaP	Green Diff	40°	3.6	8.9	10	2.1	3.0	20	100	5	567
MT3198-Y	GaAsP/GaP	Yellow Diff	40°	2.9	7.3	10	2.1	3.0	20	100	5	585
MT4198-O	GaAsP/GaP	Orange Diff	40°	4.1	10.3	10	2.1	3.0	20	100	5	635
MT4198-HR	GaAsP/GaP	Red Diff	40°	4.1	10.3	10	2.1	3.0	20	100	5	635

marktech 5 Hemlock Street • Latham, New York • (518) 786-6591 • FAX (518) 786-6599

APPLICATION NOTES

[4] Packaging Reel Packaging

a) Reel type




T-1 and T-1 3/4 packages

*Lamps with external shapes other than those above are also available. Please consult Marktech.

Content

LED Type	Quantity/Reel			
φ3 Series	2000 pcs			
φ5 Series	1000 pcs			

b) Zigzag wound tape

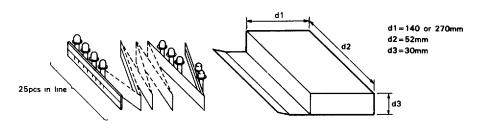

At tape beginning and end, there is additional space for 4 pcs or more

Content

LED Type	Quantity/Box			
φ3 Series	2000 or 5000 pcs			
φ5 Series	1000 or 2000 pcs			

marktech 5 Hemlock Street • Latham, New York • (518) 786-6591 • FAX (518) 786-6599