





AO4609

Complementary Enhancement Mode Field Effect Transistor


General Description	Features														
<p>The AO4609 uses advanced trench technology MOSFETs to provide excellent $R_{DS(ON)}$ and low gate charge. The complementary MOSFETs may be used to form a level shifted high side switch, and for a host of other applications.</p>	<table> <tbody> <tr> <td>n-channel</td> <td>p-channel</td> </tr> <tr> <td>V_{DS} (V) = 30V</td> <td>-30V</td> </tr> <tr> <td>I_D = 8.5A</td> <td>-3A</td> </tr> <tr> <td>$R_{DS(ON)}$</td> <td>$R_{DS(ON)}$</td> </tr> <tr> <td>< 18mΩ (V_{GS}=10V)</td> <td>< 130mΩ (V_{GS} = 10V)</td> </tr> <tr> <td>< 28mΩ (V_{GS}=4.5V)</td> <td>< 180mΩ (V_{GS} = 4.5V)</td> </tr> <tr> <td></td> <td>< 260mΩ (V_{GS} = 2.5V)</td> </tr> </tbody> </table>	n-channel	p-channel	V_{DS} (V) = 30V	-30V	I_D = 8.5A	-3A	$R_{DS(ON)}$	$R_{DS(ON)}$	< 18mΩ (V_{GS} =10V)	< 130mΩ (V_{GS} = 10V)	< 28mΩ (V_{GS} =4.5V)	< 180mΩ (V_{GS} = 4.5V)		< 260mΩ (V_{GS} = 2.5V)
n-channel	p-channel														
V_{DS} (V) = 30V	-30V														
I_D = 8.5A	-3A														
$R_{DS(ON)}$	$R_{DS(ON)}$														
< 18mΩ (V_{GS} =10V)	< 130mΩ (V_{GS} = 10V)														
< 28mΩ (V_{GS} =4.5V)	< 180mΩ (V_{GS} = 4.5V)														
	< 260mΩ (V_{GS} = 2.5V)														



SOIC-8



n-channel



p-channel

Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Max n-channel	Max p-channel	Units
Drain-Source Voltage	V_{DS}	30	-30	V
Gate-Source Voltage	V_{GS}	± 20	± 12	V
Continuous Drain Current ^A	I_D	8.5	-3	A
$T_A=70^\circ\text{C}$		6.6	-2.4	
Pulsed Drain Current ^B	I_{DM}	40	-6	
Power Dissipation	P_D	2	2	W
$T_A=70^\circ\text{C}$		1.28	1.28	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	-55 to 150	°C

Thermal Characteristics: n-channel and p-channel

Parameter	Symbol	Device	Typ	Max	Units
Maximum Junction-to-Ambient ^A	R_{0JA}	n-ch	48	62.5	°C/W
Steady-State		n-ch	74	110	°C/W
Maximum Junction-to-Lead ^C	R_{0JL}	n-ch	35	40	°C/W
Steady-State		p-ch	56	62.5	°C/W
Maximum Junction-to-Ambient ^A	R_{0JA}	p-ch	81	110	°C/W
Steady-State		p-ch	40	48	°C/W

N-Channel Electrical Characteristics ($T_j=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	30			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=24\text{V}, V_{GS}=0\text{V}$ $T_j=55^\circ\text{C}$			1 5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 20\text{V}$			100	nA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	1	1.8	3	V
$I_{\text{D(ON)}}$	On state drain current	$V_{GS}=10\text{V}, V_{DS}=5\text{V}$	30			A
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=8.5\text{A}$ $T_j=125^\circ\text{C}$		15.5 22.3	18 27	$\text{m}\Omega$
		$V_{GS}=4.5\text{V}, I_D=6\text{A}$		23	28	$\text{m}\Omega$
g_{FS}	Forward Transconductance	$V_{DS}=5\text{V}, I_D=8.5\text{A}$		23		S
V_{SD}	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.75	1	V
I_S	Maximum Body-Diode Continuous Current				3	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$		1040		pF
C_{oss}	Output Capacitance			180		pF
C_{rss}	Reverse Transfer Capacitance			110		pF
R_g	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$		0.7		Ω
SWITCHING PARAMETERS						
$Q_g(10\text{V})$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=15\text{V}, I_D=8.5\text{A}$		19.2		nC
$Q_g(4.5\text{V})$	Total Gate Charge			9.36		nC
Q_{gs}	Gate Source Charge			2.6		nC
Q_{gd}	Gate Drain Charge			4.2		nC
$t_{\text{D(on)}}$	Turn-On Delay Time	$V_{GS}=10\text{V}, V_{DS}=15\text{V}, R_L=1.8\Omega, R_{\text{GEN}}=3\Omega$		5.2		ns
t_r	Turn-On Rise Time			4.4		ns
$t_{\text{D(off)}}$	Turn-Off Delay Time			17.3		ns
t_f	Turn-Off Fall Time			3.3		ns
t_{rr}	Body Diode Reverse Recovery Time	$I_F=8.5\text{A}, dI/dt=100\text{A}/\mu\text{s}$		16.7		ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=8.5\text{A}, dI/dt=100\text{A}/\mu\text{s}$		6.7		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The value in any given application depends on the user's specific board design. The current rating is based on the $t \leq 10\text{s}$ thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.

D. The static characteristics in Figures 1 to 6 are obtained using 80 μs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The SOA curve provides a single pulse rating.

P-Channel Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=-250\mu\text{A}$, $V_{GS}=0\text{V}$	-30			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=-24\text{V}$, $V_{GS}=0\text{V}$	$T_J=55^\circ\text{C}$	-1	-5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}$, $V_{GS}=\pm 12\text{V}$			± 100	nA
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}$, $I_D=-250\mu\text{A}$	-0.6	-1	-1.4	V
$I_{D(\text{ON})}$	On state drain current	$V_{GS}=-4.5\text{V}$, $V_{DS}=-5\text{V}$	-10			A
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=-10\text{V}$, $I_D=-3\text{A}$		102	130	$\text{m}\Omega$
		$T_J=125^\circ\text{C}$	154	200		
				128	180	
		$V_{GS}=-4.5\text{V}$, $I_D=-2\text{A}$		187	260	$\text{m}\Omega$
		$V_{GS}=-2.5\text{V}$, $I_D=-1\text{A}$				
g_{FS}	Forward Transconductance	$V_{DS}=-5\text{V}$, $I_D=-3\text{A}$	3	4.5		S
V_{SD}	Diode Forward Voltage	$I_S=-1\text{A}$, $V_{GS}=0\text{V}$		-0.85	-1	V
I_S	Maximum Body-Diode Continuous Current				-2	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}$, $V_{DS}=-15\text{V}$, $f=1\text{MHz}$		409		pF
C_{oss}	Output Capacitance			55		pF
C_{rss}	Reverse Transfer Capacitance			42		pF
R_g	Gate resistance	$V_{GS}=0\text{V}$, $V_{DS}=0\text{V}$, $f=1\text{MHz}$		12		Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	$V_{GS}=-4.5\text{V}$, $V_{DS}=-15\text{V}$, $I_D=-3\text{A}$		4.4		nC
Q_{gs}	Gate Source Charge			0.8		nC
Q_{gd}	Gate Drain Charge			1.32		nC
$t_{D(\text{on})}$	Turn-On Delay Time	$V_{GS}=-10\text{V}$, $V_{DS}=-15\text{V}$, $R_L=5\Omega$, $R_{\text{GEN}}=3\Omega$		5.3		ns
t_r	Turn-On Rise Time			4.4		ns
$t_{D(\text{off})}$	Turn-Off Delay Time			31.5		ns
t_f	Turn-Off Fall Time			8		ns
t_{rr}	Body Diode Reverse Recovery Time	$I_F=-3\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$		15.8		ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=-3\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$		8		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The value in any given application depends on the user's specific board design. The current rating is based on the $t \leq 10\text{s}$ thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.

D. The static characteristics in Figures 1 to 6,12,14 are obtained using 80 μs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The SOA curve provides a single pulse rating.

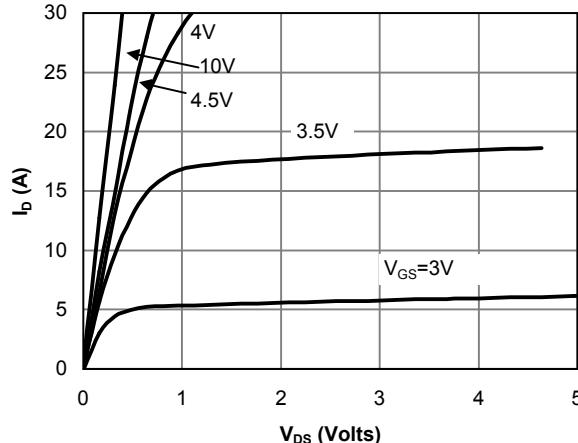
N-CHANNEL: TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Fig 1: On-Region Characteristics

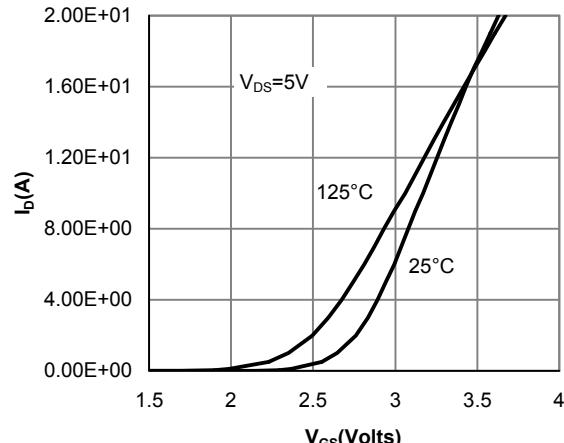


Figure 2: Transfer Characteristics

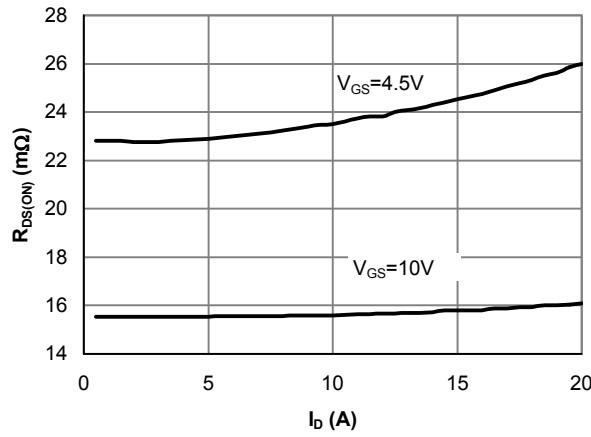


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

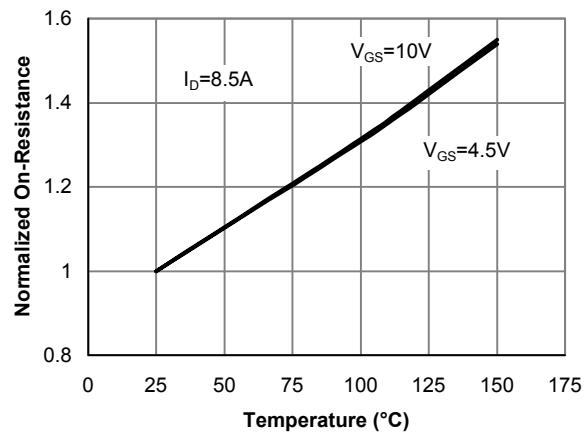


Figure 4: On-Resistance vs. Junction Temperature

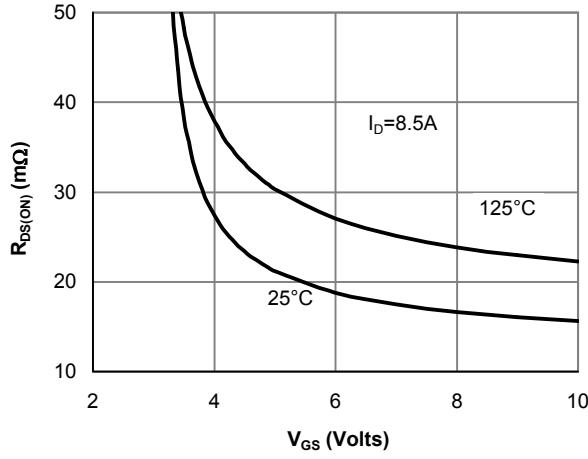


Figure 5: On-Resistance vs. Gate-Source Voltage

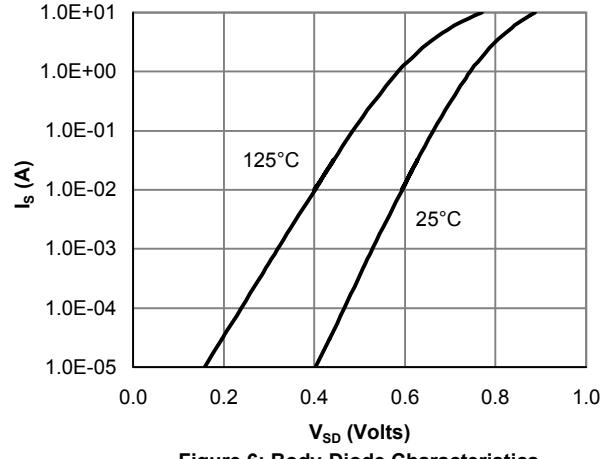


Figure 6: Body-Diode Characteristics

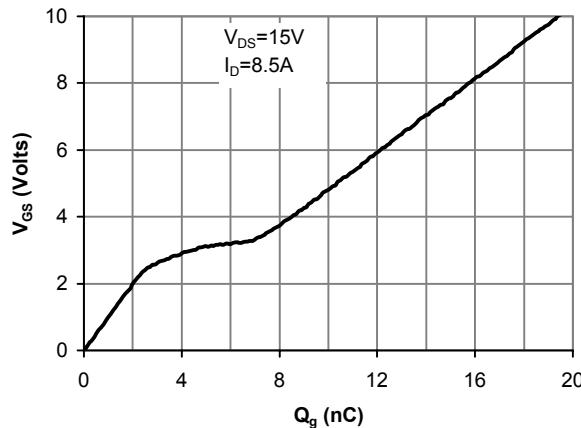
N-CHANNEL: TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 7: Gate-Charge Characteristics

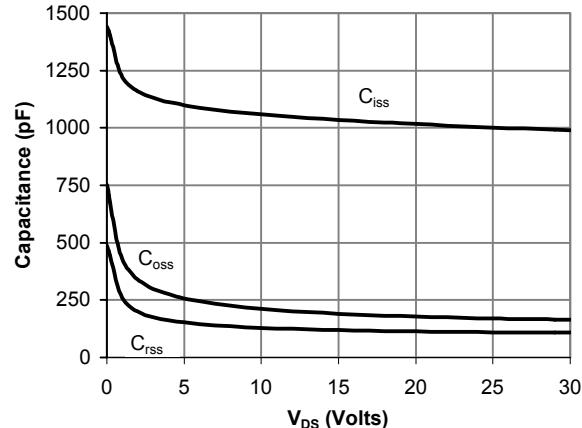


Figure 8: Capacitance Characteristics

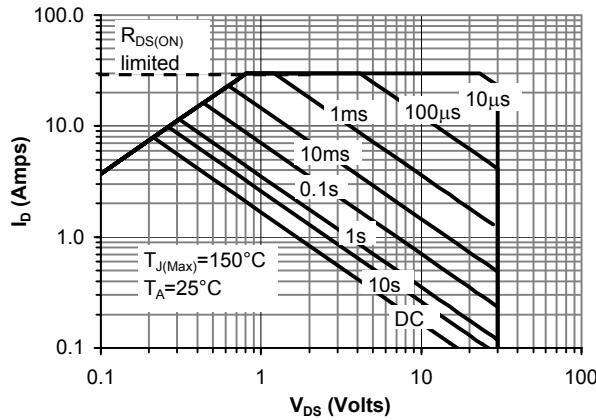


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

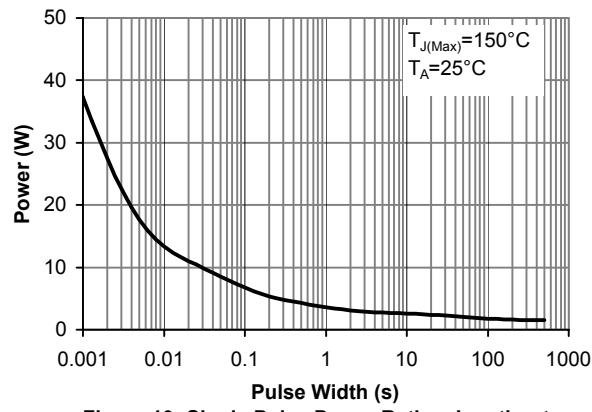


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

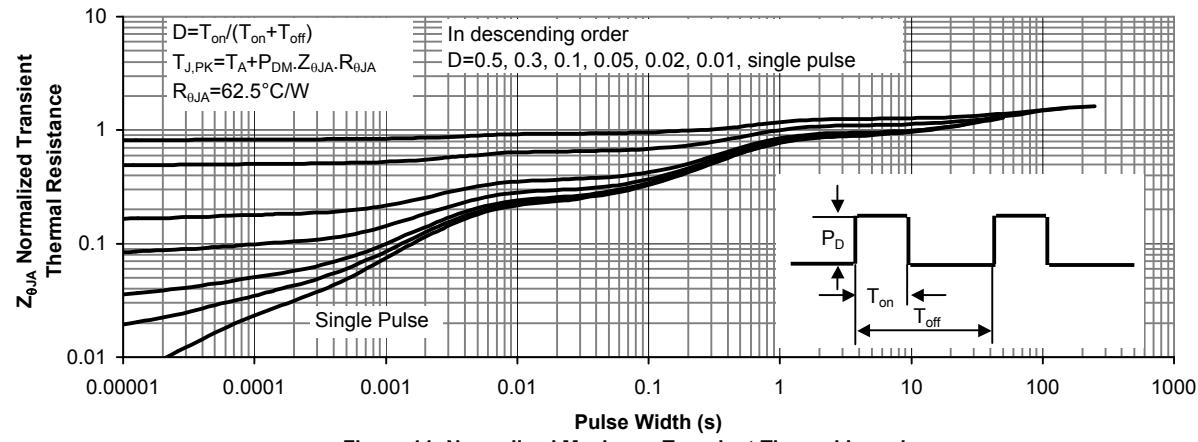


Figure 11: Normalized Maximum Transient Thermal Impedance

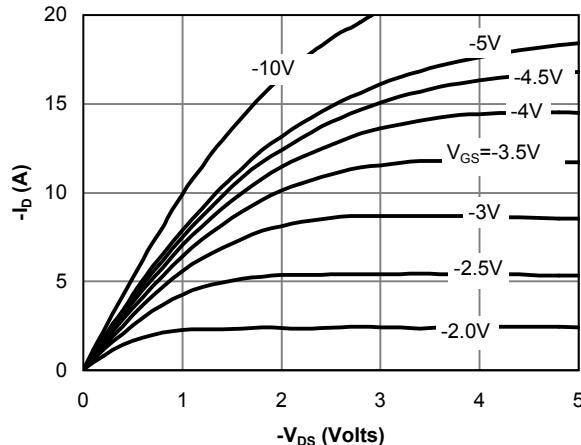
P-CHANNEL TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


Fig 1: On-Region Characteristics

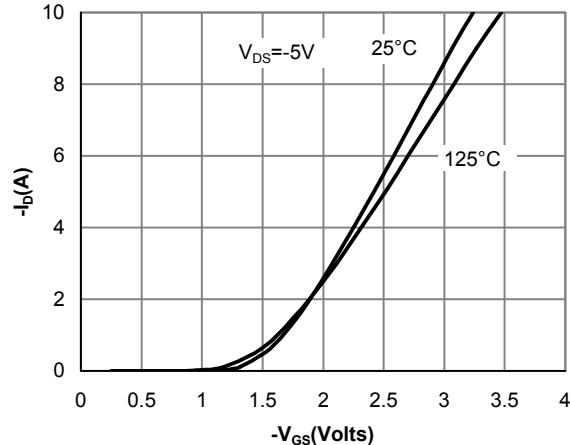


Figure 2: Transfer Characteristics

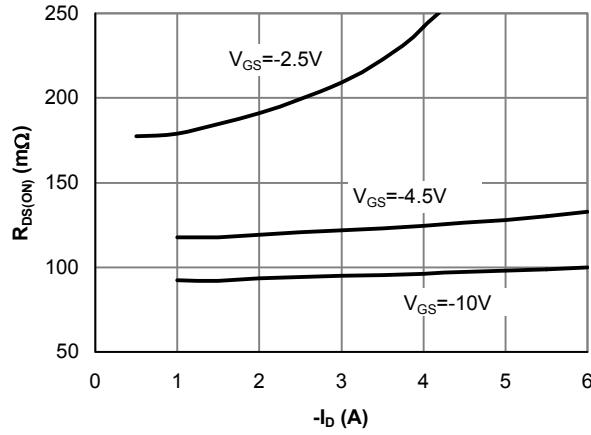


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

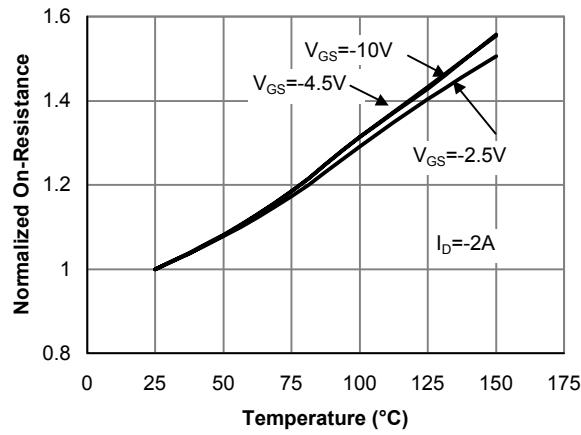


Figure 4: On-Resistance vs. Junction Temperature

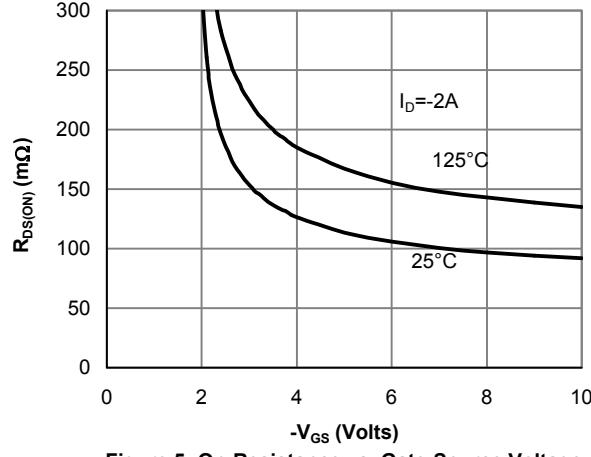


Figure 5: On-Resistance vs. Gate-Source Voltage






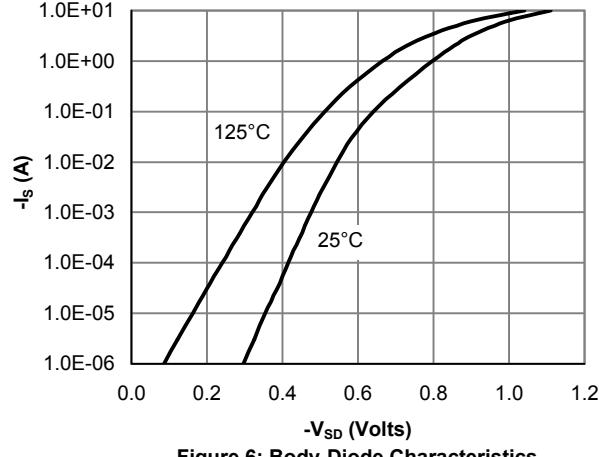


Figure 6: Body-Diode Characteristics


P-CHANNEL TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

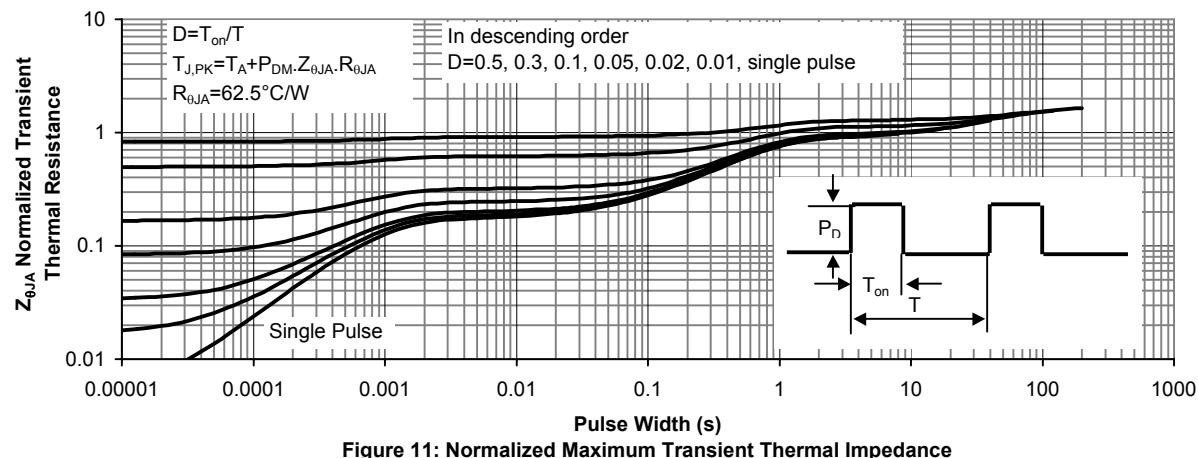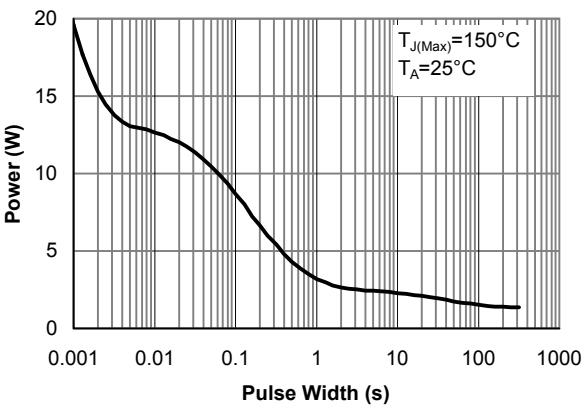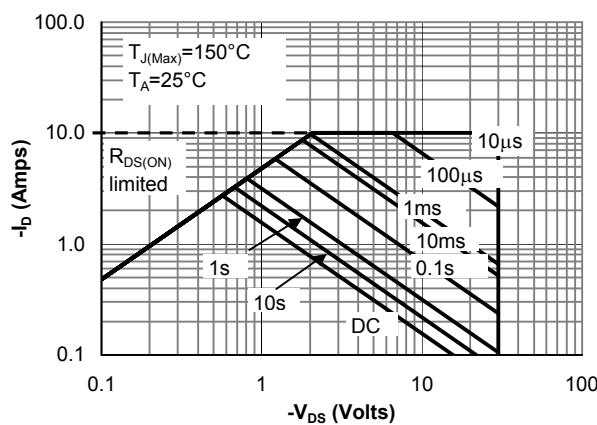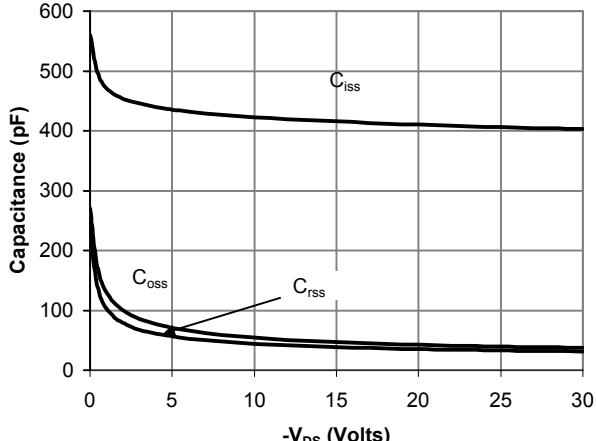

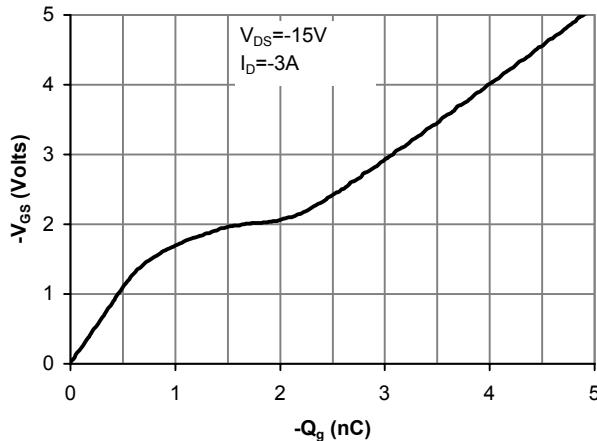

ALPHA & OMEGA
SEMICONDUCTOR, INC.

SO-8 Package Data

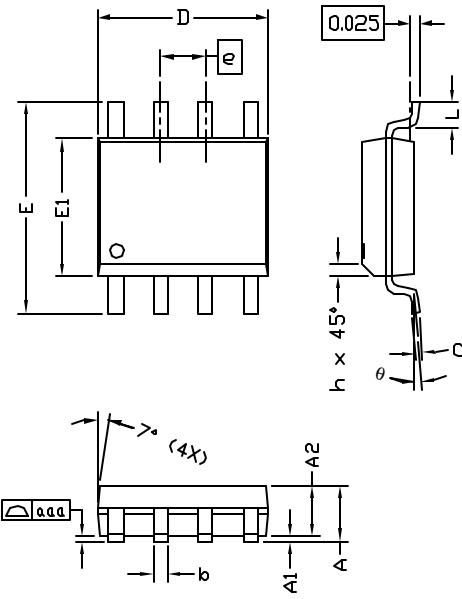


SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.45	1.50	1.55	0.057	0.059	0.061
A1	0.00	—	0.10	0.000	—	0.004
A2	—	1.45	—	—	0.057	—
b	0.33	—	0.51	0.013	—	0.020
c	0.19	—	0.25	0.007	—	0.010
D	4.80	—	5.00	0.189	—	0.197
E1	3.80	—	4.00	0.150	—	0.157
e	1.27 BSC			0.050 BSC		
E	5.80	—	6.20	0.228	—	0.244
h	0.25	—	0.50	0.010	—	0.020
L	0.40	—	1.27	0.016	—	0.050
aaa	—	—	0.10	—	—	0.004
θ	0°	—	8°	0°	—	8°

NOTE:

1. LEAD FINISH: 150 MICROINCHES (3.8 μ m) MIN.
THICKNESS OF Tin/Lead (SOLDER) PLATED ON LEAD
2. TOLERANCE ± 0.10 mm (4 mil) UNLESS OTHERWISE SPECIFIED
3. COPLANARITY : 0.10 mm
4. DIMENSION L IS MEASURED IN GAGE PLANE


PACKAGE MARKING DESCRIPTION



NOTE:

- LOGO - AOS LOGO
- 4609 - PART NUMBER CODE.
- F - FAB LOCATION
- A - ASSEMBLY LOCATION
- Y - YEAR CODE
- W - WEEK CODE.
- LC - ASSEMBLY LOT CODE

RECOMMENDED LAND PATTERN

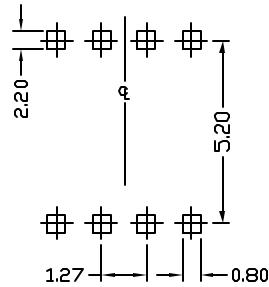

SO-8 PART NO. CODE

UNIT: mm

PART NO.	CODE
AO4609	4609


Rev.A



ALPHA & OMEGA
SEMICONDUCTOR, INC.

SO-8 Tape and Reel Data


SO-8 Carrier Tape

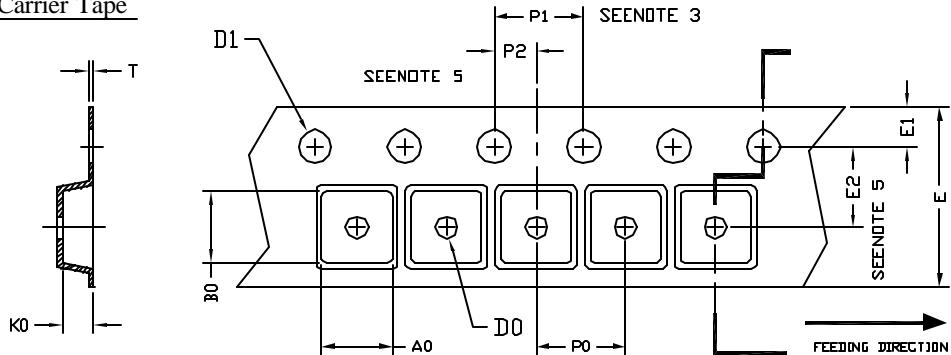

UNIT: MM

PACKAGE	A_0	B_0	K_0	D_0	D_1	E	E_1	E_2	P_0	P_1	P_2	T
SO-8 (12 mm)	6.40 ± 0.10	52.0 ± 0.10	2.10 ± 0.10	16.0 ± 0.10	1.50 ± 0.10	12.00 ± 0.30	1.75 ± 0.10	5.50 ± 0.05	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.25 ± 0.05

SO-8 Reel

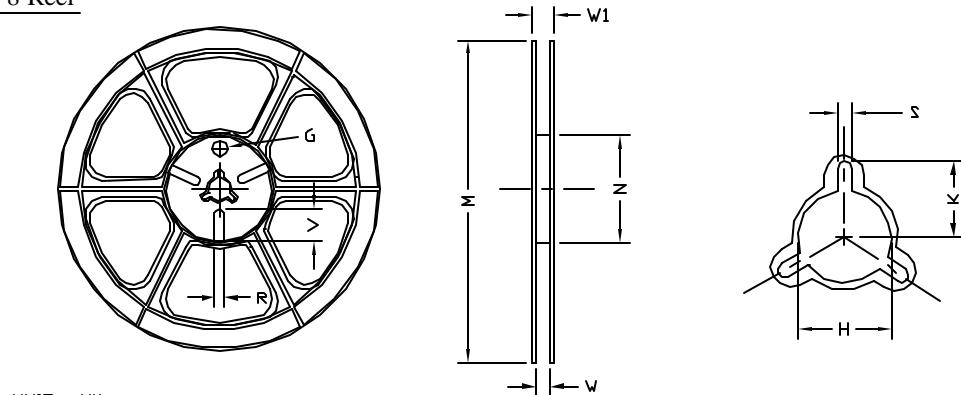


UNIT: MM

TAPE SIZE	REEL SIZE	M	N	W	W_1	H	K	S	G	R	V
12 mm	$\phi 330$	$\phi 330.00$ ± 0.50	$\phi 97.00$ ± 0.10	13.00 ± 0.30	17.40 ± 1.00	$\phi 13.00$ $+0.50$ -0.20	10.60	2.00 ± 0.50	---	---	---

SO-8 Tape

Leader / Trailer
& Orientation

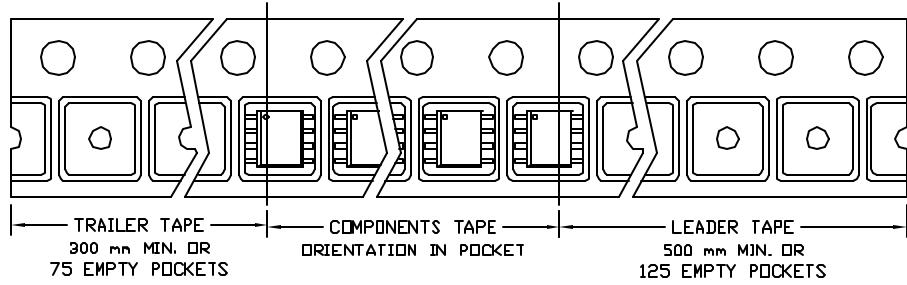





ALPHA & OMEGA
SEMICONDUCTOR, LTD.

Document No.	PD-00064
Version	rev C
Title	AO4609 Marking Description

SO-8 PACKAGE MARKING DESCRIPTION

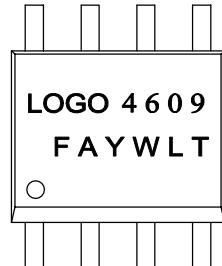

Standard product


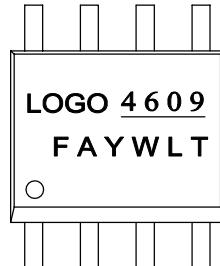


Green product

NOTE:

LOGO - AOS LOGO
4609 - PART NUMBER CODE.
F&A - FOUNDRY AND ASSEMBLY LOCATION
Y - YEAR CODE
W - WEEK CODE.
L T - ASSEMBLY LOT CODE


PART NO.	DESCRIPTION	CODE
AO4609	Standard product	4609
AO4609L	Green product	<u>4609</u>

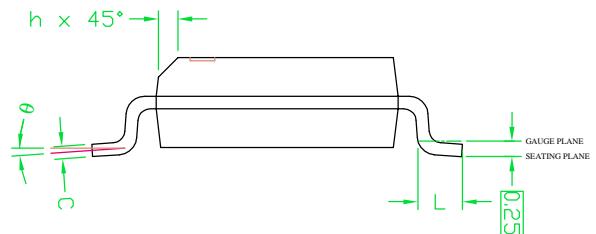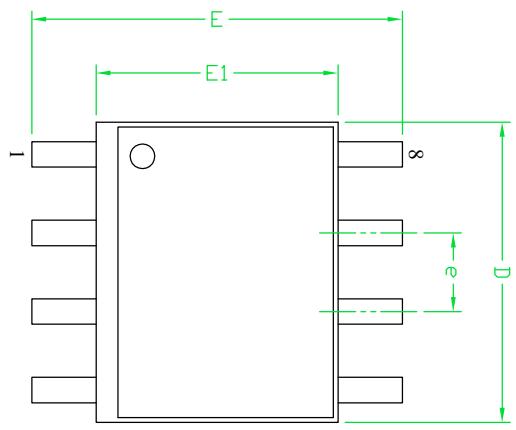

NOTE

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONS ARE INCLUSIVE OF PLATING.
3. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
4. DIMENSION L IS MEASURED IN GAUGE PLANE.
5. CONTROLLING DIMENSION IS MILLIMETER. CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.

RECOMMENDED LAND PATTERN

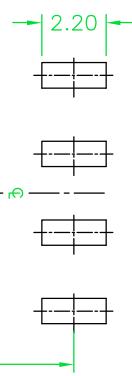

UNIT: mm

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35	1.65	1.75	0.053	0.065	0.069
A1	0.10	—	0.25	0.004	—	0.010
A2	1.25	1.50	1.65	0.049	0.059	0.065
b	0.31	—	0.51	0.012	—	0.020
c	0.17	—	0.25	0.007	—	0.010
D	4.80	4.90	5.00	0.189	0.193	0.197
E1	3.80	3.90	4.00	0.150	0.154	0.157
e	1.27 BSC			0.050 BSC		
E	5.80	6.00	6.20	0.228	0.236	0.244
h	0.25	—	0.50	0.010	—	0.020
L	0.40	—	1.27	0.016	—	0.050
θ	0°			8°		


UNLESS OTHERWISE SPECIFIED DECIMAL ANGULAR \pm \pm		THIRD ANGLE PROJECTION	 ALPHA & OMEGA SEMICONDUCTOR LTD.
Document No.	PD-00004		
Version	rev D		SO-8 PACKAGE OUTLINE



ALPHA & OMEGA
SEMICONDUCTOR, LTD.

SO-8 Tape and Reel Data


SO-8 Carrier Tape

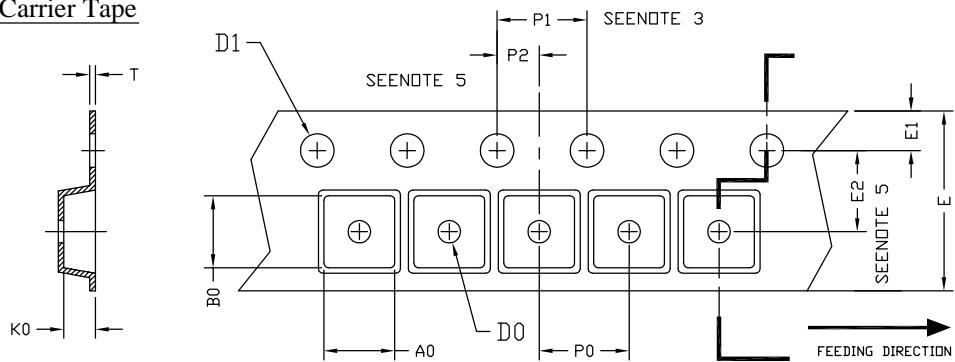

UNIT: MM

PACKAGE	A_0	B_0	K_0	D_0	D_1	E	E_1	E_2	P_0	P_1	P_2	T
SO-8 <12 mm>	6.40 ± 0.10	5.20 ± 0.10	2.10 ± 0.10	1.60 ± 0.10	1.50 $+0.10$	12.00 ± 0.30	1.75 ± 0.10	5.50 ± 0.05	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.25 ± 0.05

SO-8 Reel

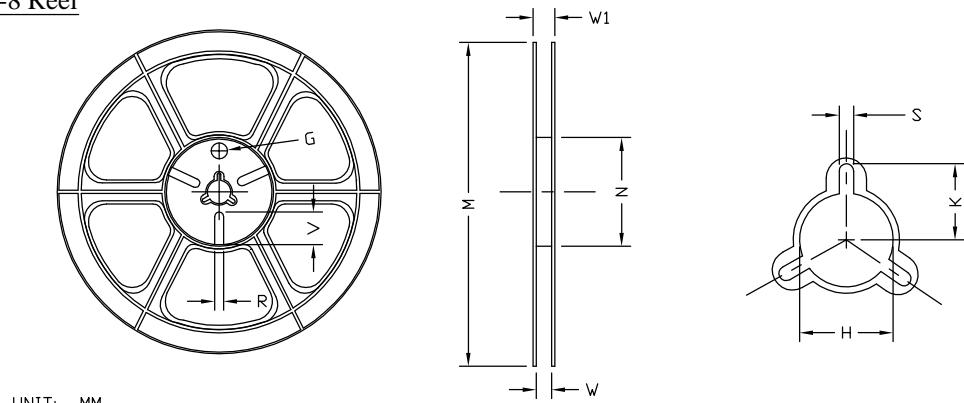

UNIT: MM

TAPE SIZE	REEL SIZE	M	N	W	W1	H	K	S	G	R	V
12 mm	Ø330	Ø330.00 ± 0.50	Ø97.00 ± 0.10	13.00 ± 0.30	17.40 ± 1.00	Ø13.00 $+0.50$ -0.20	10.60	2.00 ± 0.50	---	---	---

SO-8 Tape

Leader / Trailer
& Orientation

