


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.89	70	70.11
Insertion Loss	dB		22.49	24
1 dB Bandwidth	MHz		7.98	
2 dB Bandwidth	MHz	8	8.08	
3 dB Bandwidth	MHz		8.15	
35 dB Bandwidth	MHz		8.74	8.8
40dB Bandwidth	MHz		8.78	9.2
Passband Variation	dB		0.8	1.5
Phase Linearity($f_0 \pm 4\text{MHz}$)	degrees		6	8
Group Delay Variation($f_0 \pm 4\text{MHz}$)	nsec		140	160
Absolute Delay	usec		3.75	
Ultimate Rejection($f_0 \pm 5\text{MHz}$)	dB	50	52	
Material Temperature coefficient	KHz/°C		-6.58	
Ambient Temperature	°C		25	
Package Size		DIP3520(35.1x20.57x5.1mm3)		

Notes:


1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration

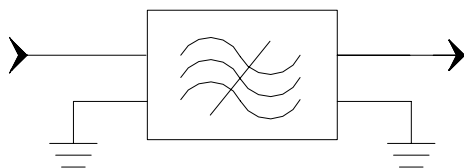


Source/Load Impedance=50 ohm


Notes - Component values may change depending
on board layout.

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBN70A08	
		Rev. Date	2005-8-18	
		Rev.	1.0	Page 1/3


Package Dimension

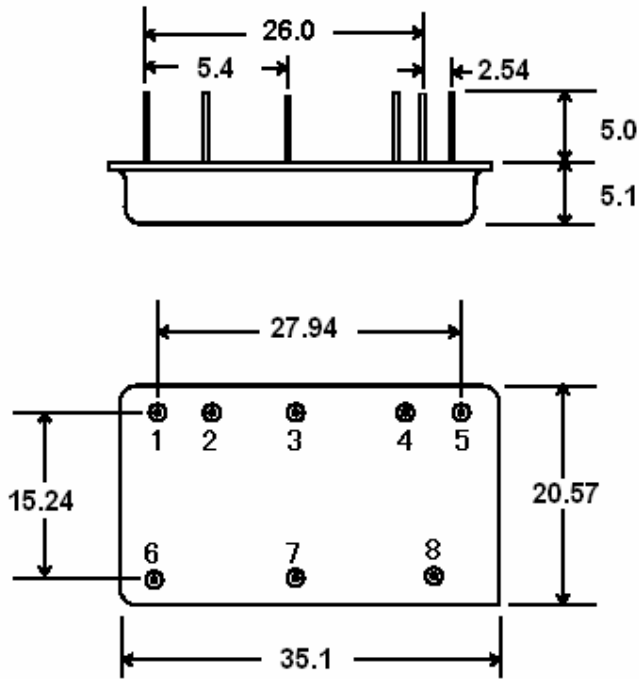


**INPUT:5
OUTPUT:1**

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBN70A08	
		Rev. Date	2005-8-18	
		Rev.	1.0	Page

Typical Performance

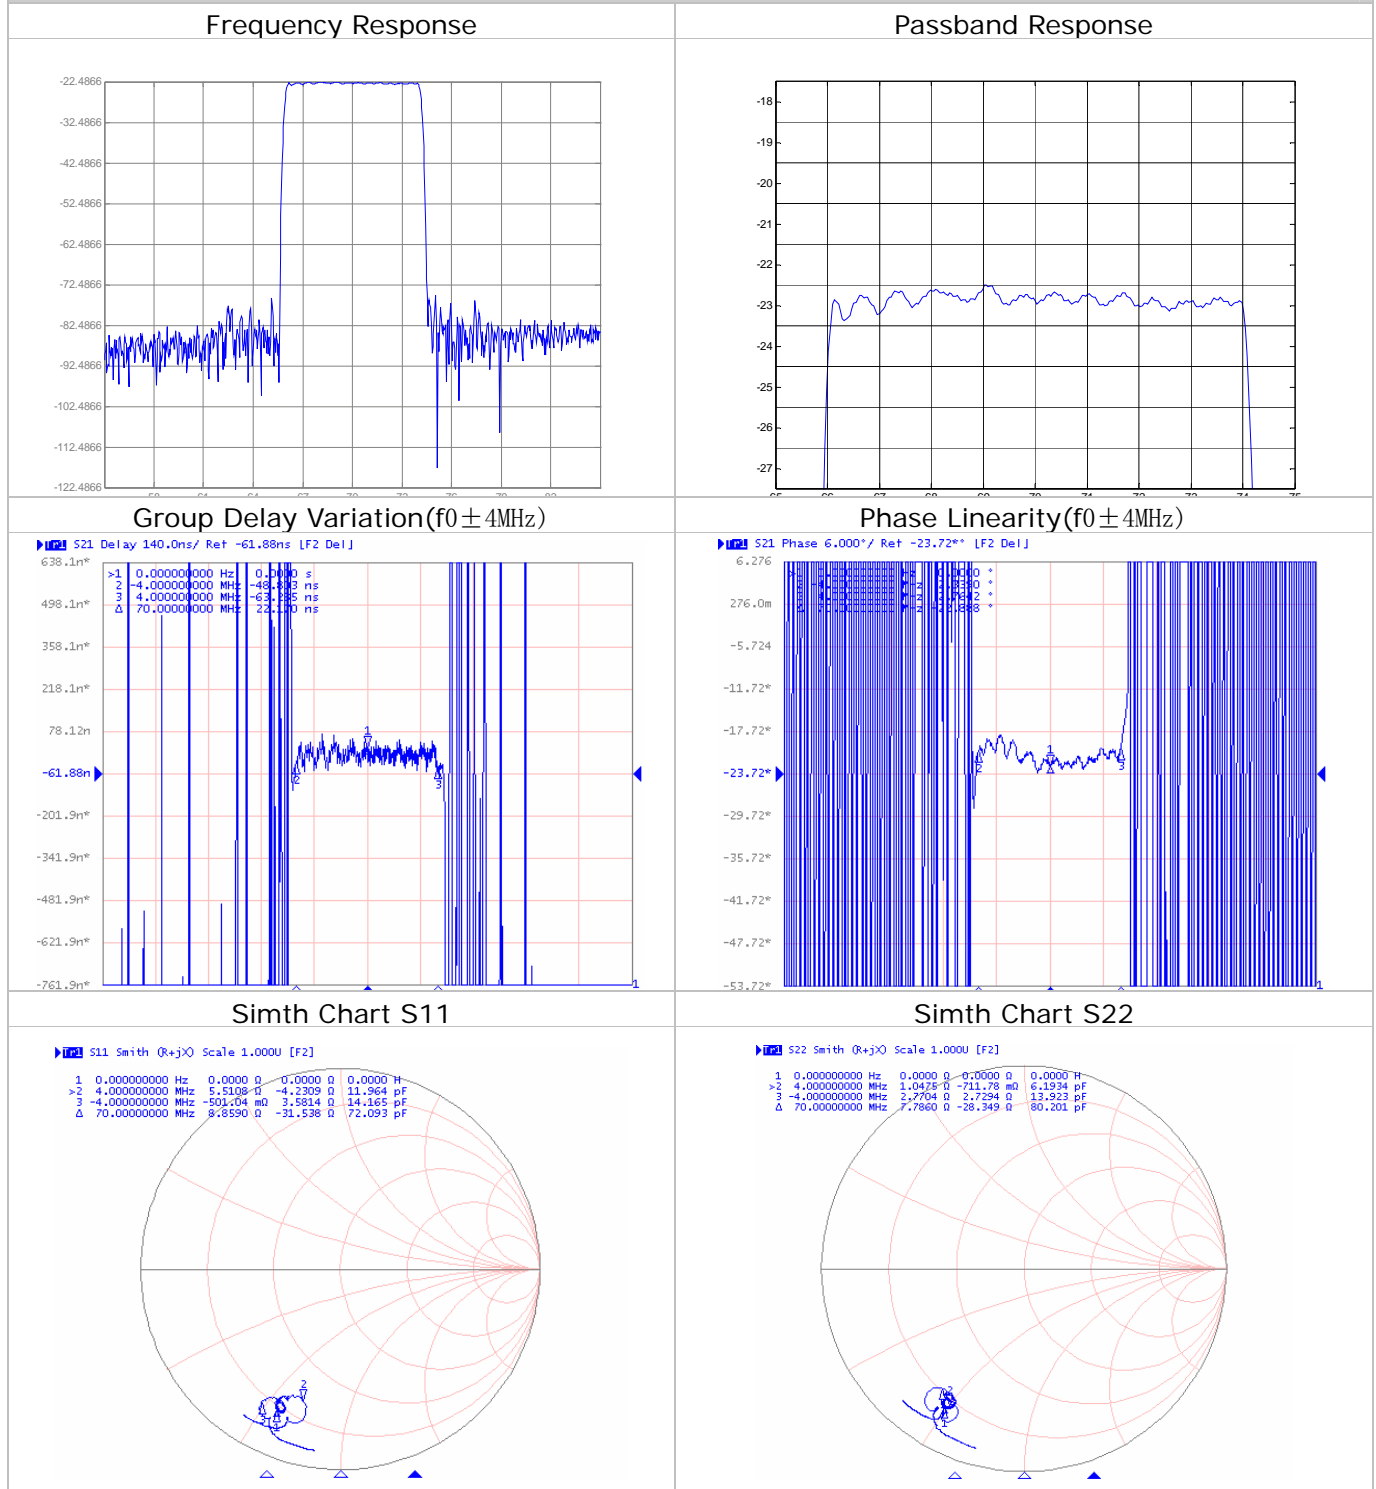

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBN70A08	
		Rev. Date	2005-8-18	
		Rev.	1.0	Page