


Features

1. Molded epoxy body.
2. Zero crossing circuit.
3. High input/output insulation.
4. Small size and light weight.
5. Fast reactive speed.
6. Good heat sinking.
7. Normally open.


Applications

1. Household Appliances.
2. Temperature Control System.
3. Industrial Automatic Control.
4. Lighting System.
5. Office Appliances.
6. Factory Appliances.

Outside Dimension : Unit (mm)

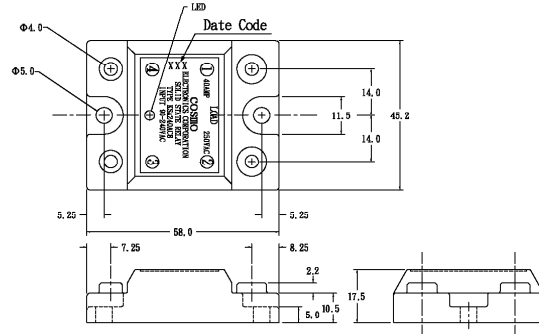

Schematic : Top View

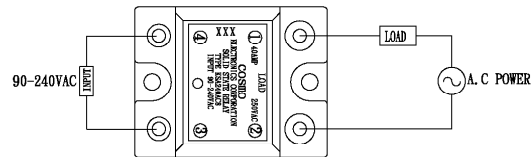

Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Input	Input Signal Voltage	V _{IN}	100~240 VAC
	Drop-out Voltage	V _{do}	10 VAC
Output	RMS on-state current	I _T	40 Arms
	Peak one cycle surge current (8.3 ms)	I _{surge}	400 A
	Repetitive peak-off state Voltage	V _{DRM}	600 V
	Operating frequency	f	47~70 Hz
	Critical rate of rise of on-state current	di/dt	50 A/μS
	Load supply voltage	V _{out}	250 Vrms AC
	Isolation Voltage input to output	V _{iso}	4000 Vrms
Operating Temperature	T _{opr}	-30~80 °C	
Storage Temperature	T _{stg}	-30~100 °C	

Electrical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit
Input	Pick-up Voltage	V _{pu}			100	VAC
	Input resistance	R _{in}	R _{IN} =11KΩ		11	KΩ
Output	On-state Voltage	V _T	I _T =1Arms		1.5	Vrms
	Operating Current Minimum	I _{op}	V _{out} =240Vrms	50		mArms
	Leakage Current Open Circuit	I _{leak}	V _{out} =240Vrms		3.5	mArms
	Critical rate of rise of off-state Voltage	dv/dt	See Note 1	100		V/μS
	Zero-cross Voltage				Yes	
	Load Voltage Rating	V _{out}	I _T =50mArms MIN	50		280 VAC
Minimum trigger current	I _{FT}	V _{DRM} =600V			25 mA	
Isolation resistance input to output	R _{iso}	DC500V	10 ¹⁰			Ω
Turn-on time	T _{on}	60Hz AC			8.3 mS	
Turn-off time	T _{off}	60Hz AC			8.3 mS	
Thermal resistance (between junction and case)	R _{th(j-c)}			1.3		°C/W

Note1 : Output (dv/dt) protection is provided in all models, and they are designed to switch resistive or inductive loads to 0.2 power factor. The dv/dt rating is based on source impedance of 50 ohms.

Data Curve

