


12,500 V - 20,000 V Rectifier Stacks

2.2 A Forward Current
150 ns Recovery Time


FP125F FP150F
FP175F FP200F



ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V _{rwm})	Average Rectified Current (in oil) (I _o)		Reverse Current @ V _{rwm} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (1) (T _{rr})	Case Length (L) (in.)
		55°C	100°C	25°C	100°C	25°C	25°C	25°C	25°C	25°C	
		Amps	Amps	μA	μA	Volts	Amps	Amps	Amps	ns	
FP125F	12500	2.2	1.3	2.0	50	30.0	3.0	120	20	150	5.500
FP150F	15000	2.2	1.3	2.0	50	36.0	3.0	120	20	150	6.500
FP175F	17500	2.2	1.3	2.0	50	42.0	3.0	120	20	150	6.500
FP200F	20000	2.2	1.3	2.0	50	48.0	3.0	120	20	150	6.500

(1) T_{rr} Testing: I_f=0.5A, I_r=1.0A, I_{rr}=0.25A *Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +150°C

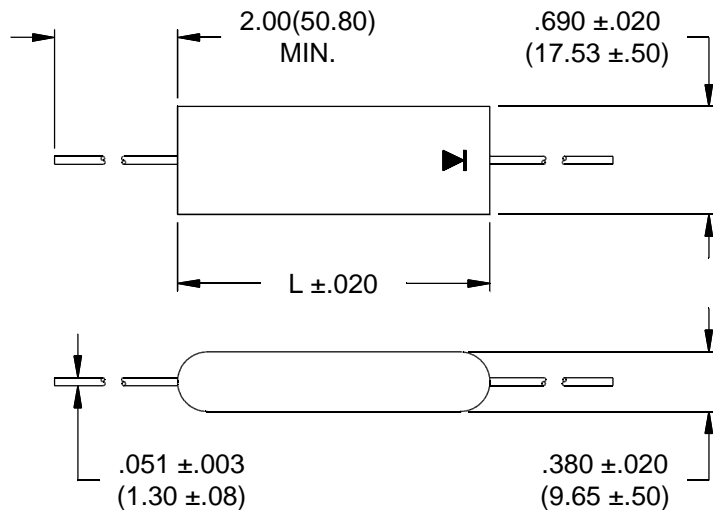

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

FP125F FP150F FP175F FP200F

