

MD SERIES**P22TG-XXXXZ2:1 1.5 KV ISOLATED 5 W REGULATED DUAL OUTPUT DIP24****Available Inputs:****12, 24 and 48 VDC Wide Input 2:1****Available Outputs:****(+/-) 3.3, 5, 12, 15 and 18 VDC**

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range 9 -18 VDC (12 VDC), 18 - 36 VDC (24 VDC), 36 - 72 VDC (48 VDC)
 Filter Pi Network

Isolation Specifications

Rated voltage 1500 Vdc
 Leakage current 1 mA
 Resistance 10⁹ Ohm
 Capacitance 120 pF typ.

Output Specifications

Voltage accuracy +/- 1 % typ. +/-2% max.
 Ripple and noise (at 20 MHz BW) 60 mV p-p, max.
 Short circuit protection Continuous , restart automatic
 Line voltage regulation +/- 0,5 % max.
 Load voltage regulation +/- 0,5 % max.
 Temperature coefficient +/- 0,02 % / °C

General Specifications

Efficiency 70 % to 85 %
 Switching frequency 250 KHz, typ.

Environmental Specifications

Operating temperature (ambient) -40°C to +85°C
 Storage temperature - 55 °C to + 125 °C
 Derating See graph
 Humidity Up to 90 %, non condensing
 Cooling Free air convection


Physical Characteristics

Dimensions 31,75 x 20,32 x 10,16 mm
 1,25 x 0,80 x 0,40 inches
 Weight 17,0 g
 Case material Non conductive black plastic


Examples of Partnumbers/Modelcode

PART NO.	INPUT VOLTAGE (VDC) Nominal	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P22TG-1205Z2:1	9-18	33	563	+/- 5	+/- 500	74
P22TG-1212Z2:1	9-18	33	534	+/- 12	+/- 208	78
P22TG-2405Z2:1	18-36	31	274	+/- 5	+/- 500	76
P22TG-4805Z2:1	36-72	29	139	+/- 5	+/- 500	75
P22TG-4812Z2:1	36-72	29	132	+/- 12	+/- 208	79

Dimensions

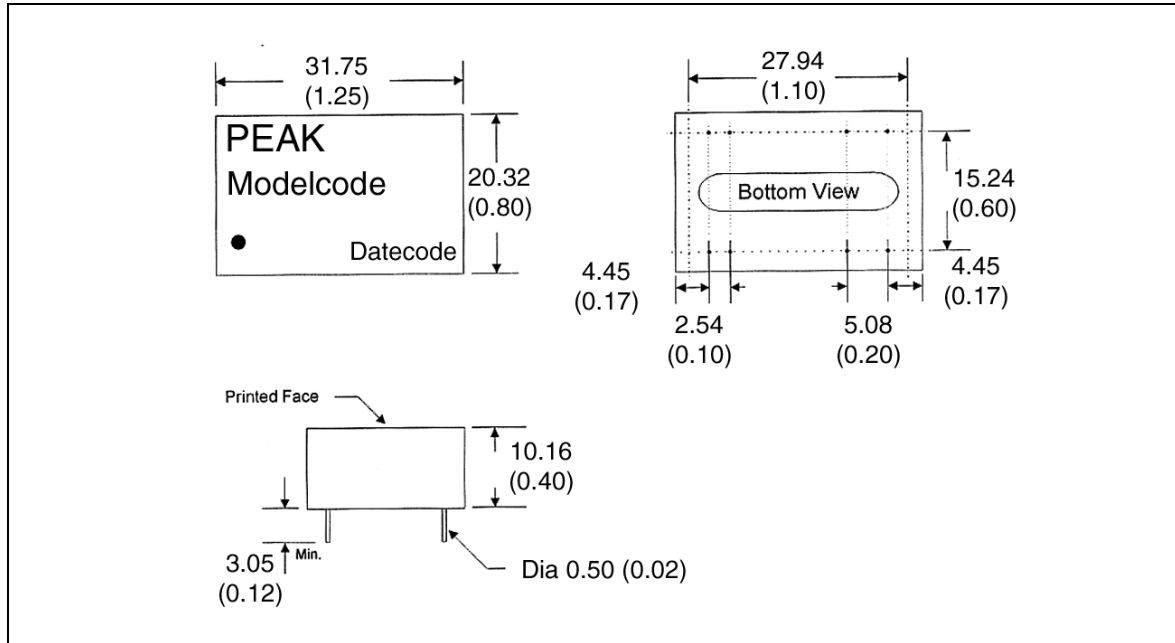

Derating Graph and Pinning

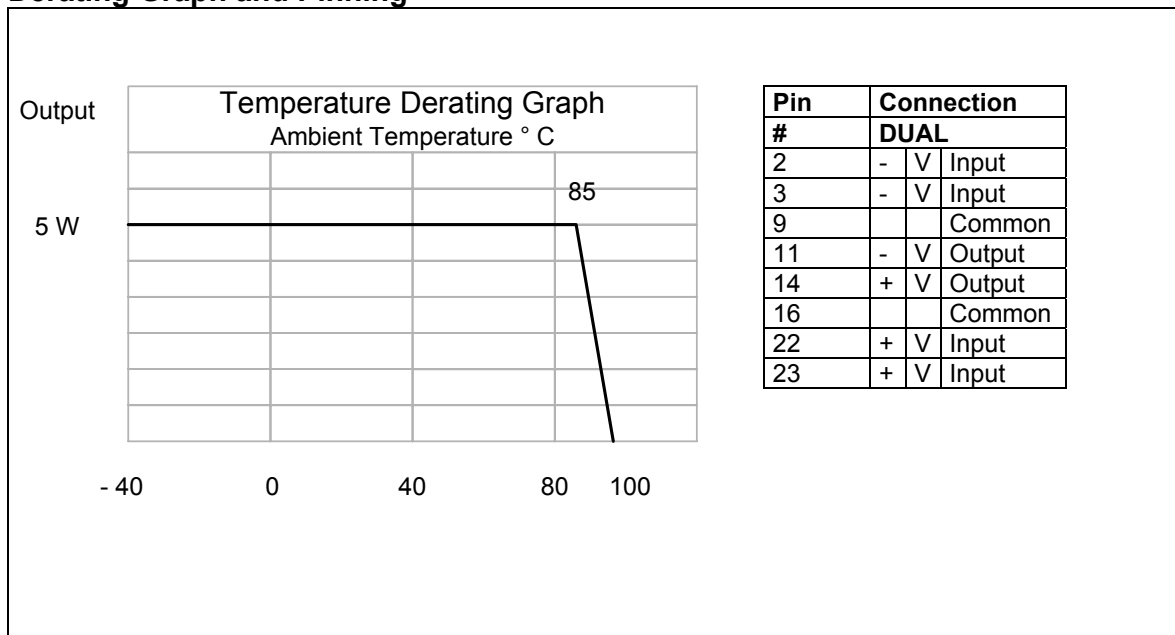

Specification can be changed without notice.

Copyright PEAK electronics GmbH

REV:2 / 09.2001