
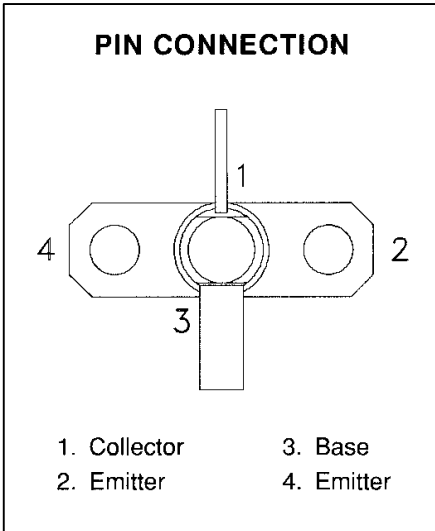


MS3383

**RF & MICROWAVE TRANSISTORS
GENERAL PURPOSE AMPLIFIER APPLICATIONS**

Features

- **GOLD METALIZATION**
- **P_{OUT} = 1.0 W MINIMUM**
- **3.0 GHz**
- **G_p = 7.0 dB**
- **INFINITE VSWR CAPABLE @ RATED CONDITIONS**
- **HERMETIC PACKAGE**
- **COMMON BASE CONFIGURATION**

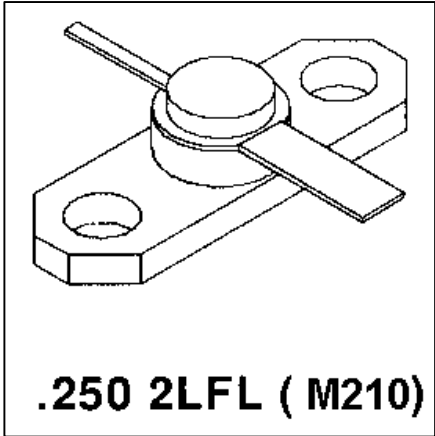

DESCRIPTION:

The MS3383 is a common base, hermetically sealed silicon NPN microwave power transistor. This device is designed for Class C applications in the 1 - 3 GHz frequency range. Gold metallization and emitter ballasting provide long term reliability and superior ruggedness.

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
P _{DISS}	Power Dissipation*	6.0	W
V _{CC}	Collector-Supply Voltage*	30	V
I _C	Device Current*	200	mA
T _J	Junction Temperature	200	°C
T _{STG}	Storage Temperature	-65 to +200	°C

Thermal Data

R _{TH(J-C)}	Thermal Resistance Junction-case	25	°C/W
----------------------	----------------------------------	----	------

*Applies only to rated RF amplifier operation

ELECTRICAL SPECIFICATIONS (T_{case} = 25°C)
STATIC

Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
BV_{CBO}	I_C = 1 mA	I_E = 0 mA	45	---	---	V
BV_{CER}	I_C = 5 mA	R_{BE} = 10 Ω	45	---	---	V
BV_{EBO}	I_E = 1 mA	I_C = 0 mA	3.5	---	---	V
I_{CBO}	V_{CE} = 28 V		---	---	0.5	mA
H_{FE}	V_{CE} = 5 V	I_C = 100 mA	30	---	300	---

DYNAMIC

Symbol	Test Conditions			Value			Unit
				Min.	Typ.	Max.	
P_{OUT}	f = 3.0 GHz	P_{IN} = 0.20 W	V_{CC} = 28V	1.0	---	---	W
G_P	f = 3.0 GHz	P_{IN} = 0.20 W	V_{CC} = 28V	7.0	---	---	dB
η_C	f = 3.0 GHz	P_{IN} = 0.20 W	V_{CC} = 28V	30	---	---	%
C_{OB}	f = 1 MHz	V_{CB} = 28V		---	---	3.5	pF

IMPEDANCE DATA


FREQ	Z _{IN} (Ω)	Z _{CL} (Ω)
1.0 GHz	9.0 + j9.0	21 + j48.0
2.0 GHz	18 + j34.5	7.5 + j22.0
3.0 GHz	65 + j22.0	3.8 + j3.0

P_{IN} = 0.20W V_{CC} = 28V

PACKAGE MECHANICAL DATA

PACKAGE STYLE M210

www.DataSheet4U.com

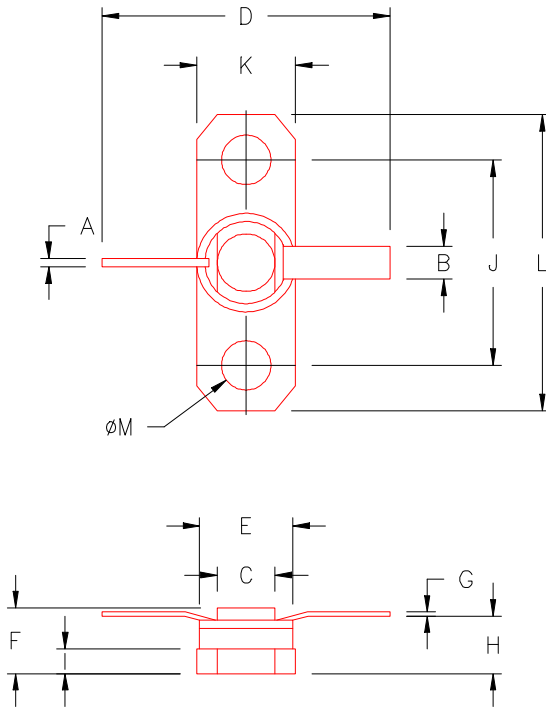

	MINIMUM INCHES/MM	MAXIMUM INCHES/MM		MINIMUM INCHES/MM	MAXIMUM INCHES/MM
A	.028/0,71	.032/0,81	J	.560/14,22	.570/14,48
B	.110/2,80	.117/2,97	K	.245/6,22	.255/6,48
C	.165/4,19	.185/4,70	L	.790/20,07	.810/20,57
D	.740/18,80		M	.128/3,25	.132/3,35
E	.225/5,72	.235/5,97			
F	.149/2,30	.187/4,75			
G	.003/0,08	.007/0,18			
H	.117/2,97	.133/3,38			
I	.058/1,47	.068/1,73			