




Surface Mount Attenuator 10 Watts

Description

The RFP-250250N4AAXX is high performance Aluminum Nitride (AlN) surface mount attenuator intended as a lower cost alternative to Beryllium Oxide (BeO). The attenuator is well suited to all cellular frequency bands such as; AMPS, GSM, DCS, PCS, PHS and UMTS. The high power handling makes the part ideal for inter-stage matching, directional couplers, and for use in isolators.

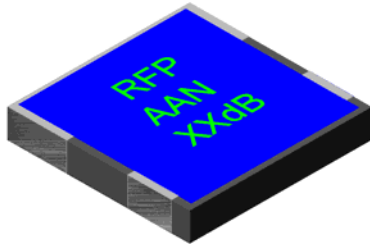

General Specifications

Resistive Element	Thick film
Substrate	Aluminum Nitride Ceramic
Terminal Finish	Matte Tin over Sulfamate Nickel
Operating Temperature	-55 to +125°C (see chart)

Tolerance is $\pm 0.010"$, unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. All dimensions in inches.

Electrical Specifications


Attenuation Value:	1 – 6, 9, 10dB
Power:	10 Watts
Frequency Range:	DC – 2.0 GHz
V.S.W.R.:	<1.25:1

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change.**

Features:

- Low Cost
- Surface Mount
- Aluminum Nitride Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested

Outline Drawing

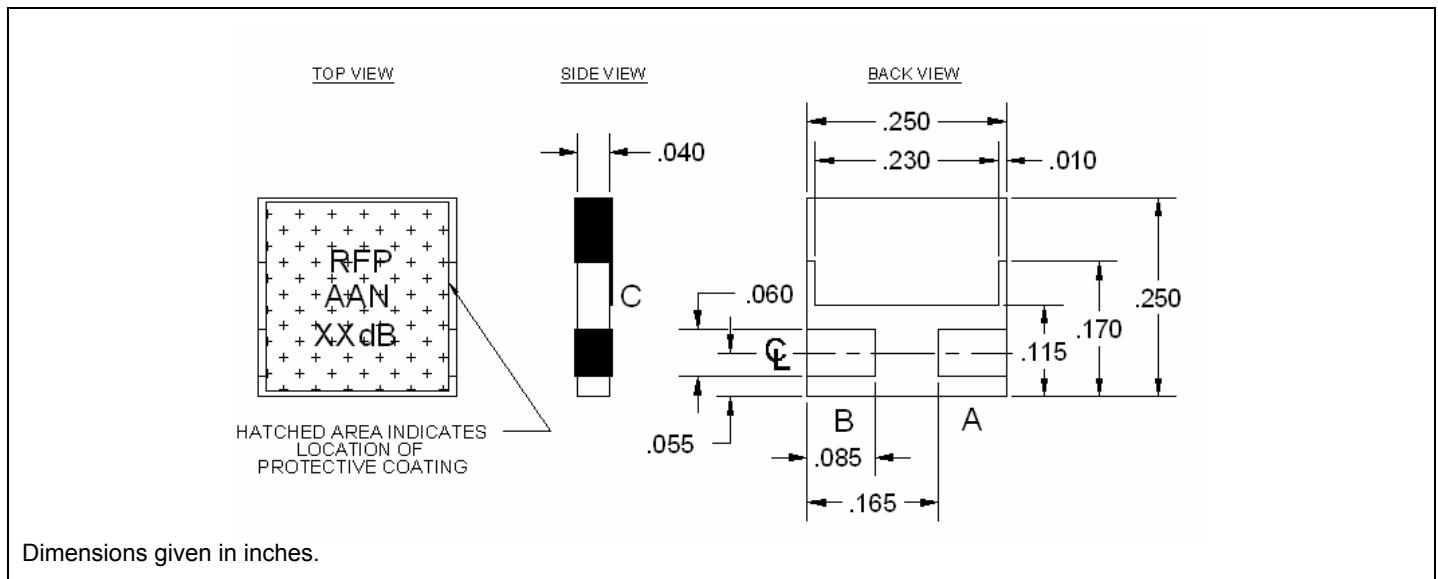


Rev. 3/3/06




Specifications:

PART NUMBER	ATTENUATION(dB)	TOL. (\pm dB)	POWER (WATTS)	VSWR	FREQ (GHZ)
RFP-250250N4AA1	1	0.2	10	1.25:1	2.0
RFP-250250N4AA2	2	0.3	10	1.25:1	2.0
RFP-250250N4AA3	3	0.3	10	1.25:1	2.0
RFP-250250N4AA4	4	0.3	10	1.25:1	2.0
RFP-250250N4AA5	5	0.3	10	1.25:1	2.0
RFP-250250N4AA6	6	0.4	10	1.25:1	2.0
RFP-250250N4AA9	9	0.6	10	1.25:1	2.0
RFP-250250N4AA10	10	0.7	10	1.25:1	2.0


Power De-rating:

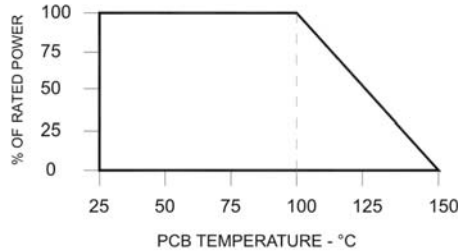

Tape & Reel:

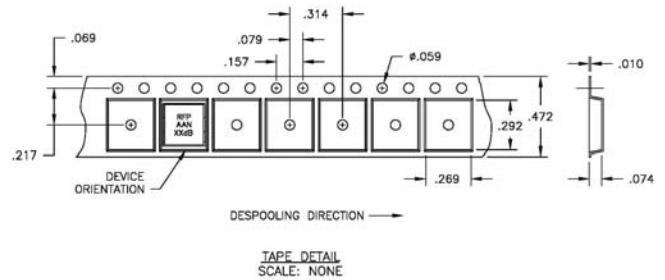

Mounting Footprint and Procedure:

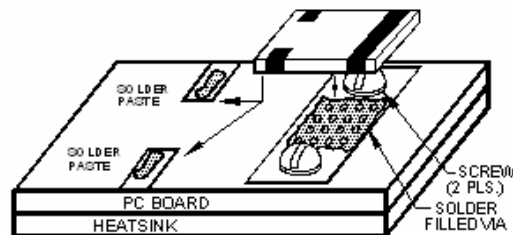

USA/Canada: (315) 432-8909
 Toll Free: (800) 544-2414
 Europe: +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.



Anaren
 What'll we think of next?™