

BYD33D - BYD33M

PRV : 200 - 1000 Volts
Io : 1.3 Amperes


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : DO-41 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.339 gram

AVALANCHE FAST SOFT-RECOVERY RECTIFIER DIODES

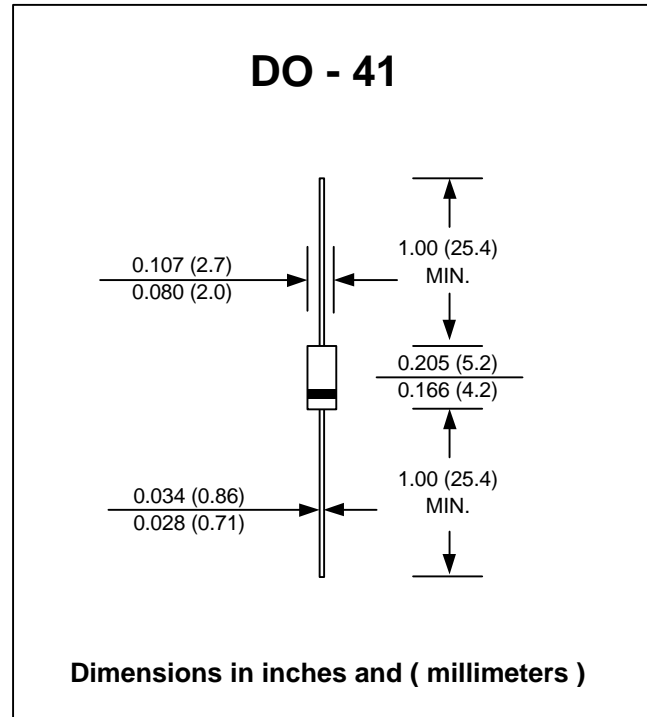

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	BYD 33D	BYD 33G	BYD 33J	BYD 33K	BYD 33M	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	200	400	600	800	1000	V
Maximum Continuous Reverse Voltage	V _R	200	400	600	800	1000	V
Min. Reverse Avalanche Breakdown Voltage @ I _R = 0.1 mA	V _{(BR)R-min}	300	500	700	900	1100	V
Maximum Average Forward Current T _{tp} = 55 °C (Note 1)	I _{F(AV)}	1.3					A
Maximum Non-Repetitive Peak Forward Surge Current	I _{FSM}	20					A
Maximum Repetitive Peak Forward Current	I _{FRM}	12					A
Maximum Forward Voltage at 1.0 Amp.	V _F	1.3					V
Maximum Reverse Current at Reverse Voltage	I _R	1.0					μA
Maximum Reverse Current at Reverse Voltage T _J = 165 °C	I _{R(H)}	100					μA
Maximum Reverse Recovery Time (Note 2)	T _{rr}	250			300		ns
Thermal Resistance - Junction to Ambient	R _{θJA}	120					K / W
Junction Temperature Range	T _J	- 65 to + 175					°C
Storage Temperature Range	T _{STG}	- 65 to + 175					°C

Notes :

- (1) Lead Length 10 mm.
- (2) Measured with I_F = 1 Amp to V_R ≥ 30V

RATING AND CHARACTERISTIC CURVES (BYD33D - BYD33M)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC

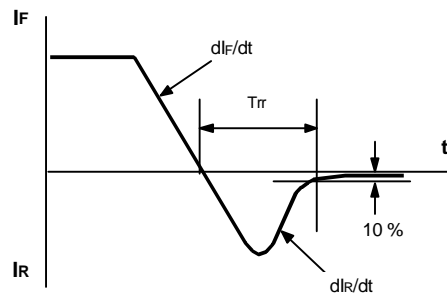


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

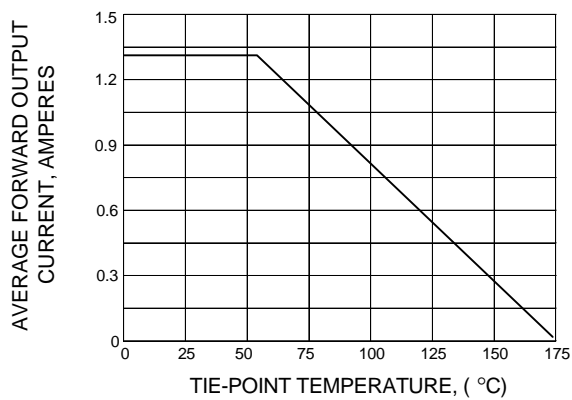


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

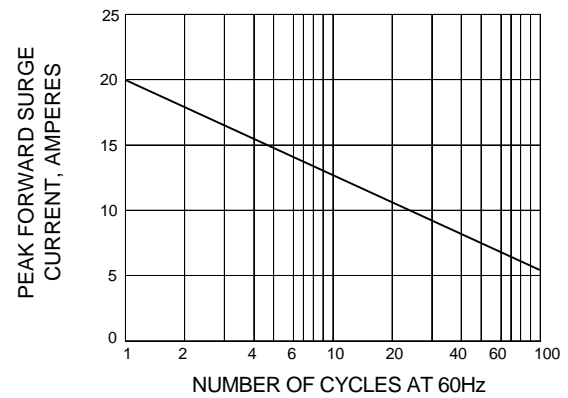


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

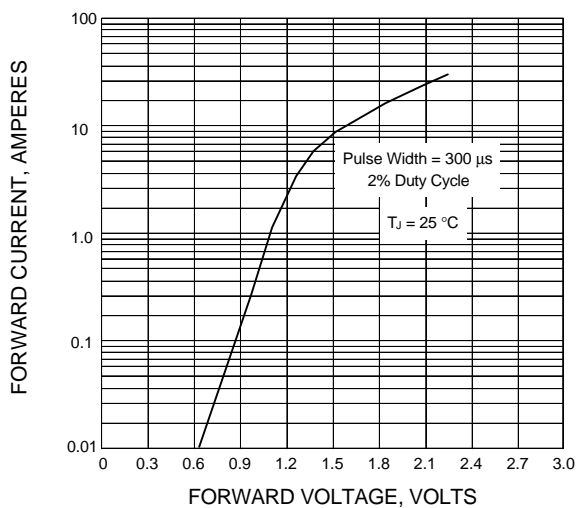


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

