



# SAW Components

Data Sheet M 1871 M





**SAW Components**

**M 1871 M**

**IF Filter for Intercarrier Applications**

**45,75 MHz**

**Data Sheet**

**Standard**

- M/N


**Features**

- IF Filter with Nyquist slope and sound shelf
- Constant group delay

**Terminals**

- Tinned CuFe alloy


Plastic package **SIP5K**

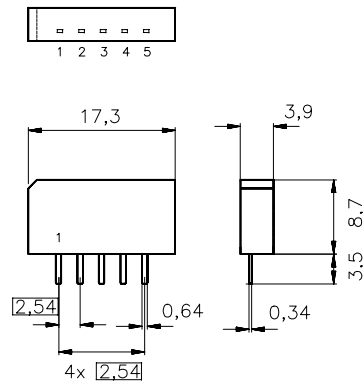

Dimensions in mm, approx. weight 1,0 g

**Pin configuration**

- 1 Input
- 2 Input - ground
- 3 Chip carrier - ground
- 4 Output
- 5 Output



Type	Ordering code	Marking and package according to	Packing according to
M 1871 M	B39458-M1871-M100	C61157-A1-A15	F61074-V8067-Z000

**Maximum ratings**

Operable temperature range	$T_A$	-25/+65	°C	
Storage temperature range	$T_{stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	5	V	between any terminals
AC voltage	$V_{pp}$	10	V	between any terminals


**SAW Components**
**M 1871 M**
**IF Filter for Intercarrier Applications**
**45,75 MHz**
**Data Sheet**
**Characteristics**



Reference temperature:  $T_A = 25 (45) \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \text{ } \Omega$   
 Terminating load impedance:  $Z_L = 2 \text{ k}\Omega \parallel 3 \text{ pF}$

		min.	typ.	max.	
<b>Insertion attenuation</b>					
	$\alpha$				
Reference level for the following data	44,06 (44,00) MHz	11,2	12,7	14,2	dB
<b>Relative attenuation</b>					
	$\alpha_{\text{rel}}$				
Picture carrier	45,81 (45,75) MHz	5,0	6,0	7,0	dB
Color carrier	42,23 (42,17) MHz	3,3	4,3	5,3	dB
Sound carrier	41,31 (41,25) MHz	15,6	17,1	18,6	dB
Adjacent picture carrier	39,81 (39,75) MHz	48,0	62,0	—	dB
Adjacent sound carrier	47,31 (47,25) MHz	40,0	47,0	—	dB
Lower sidelobe					dB
	35,06 ... 39,81 (35,00 ... 39,75) MHz	36,0	42,0	—	dB
Upper sidelobe					dB
	47,31 ... 55,06 (47,25 ... 55,00) MHz	35,0	41,0	—	dB
<b>Reflected wave signal suppression</b>					
1,0 $\mu\text{s}$ ... 6,0 $\mu\text{s}$ after main pulse (test pulse 250 ns, carrier frequency 44,06 MHz)		42,0	52,0	—	dB
<b>Feedthrough signal suppression</b>					
0,9 $\mu\text{s}$ ... 0,8 $\mu\text{s}$ before main pulse (test pulse 250 ns, carrier frequency 44,06 MHz)		50,0	56,0	—	dB
<b>Group delay ripple (p-p)</b>	$\Delta\tau$	—	50	—	ns
<b>Impedance at 44,06 MHz</b>					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	1,6 $\parallel$ 8,4	—	k $\Omega$ $\parallel$ pF
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1,1 $\parallel$ 3,6	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K



Data Sheet

Frequency response

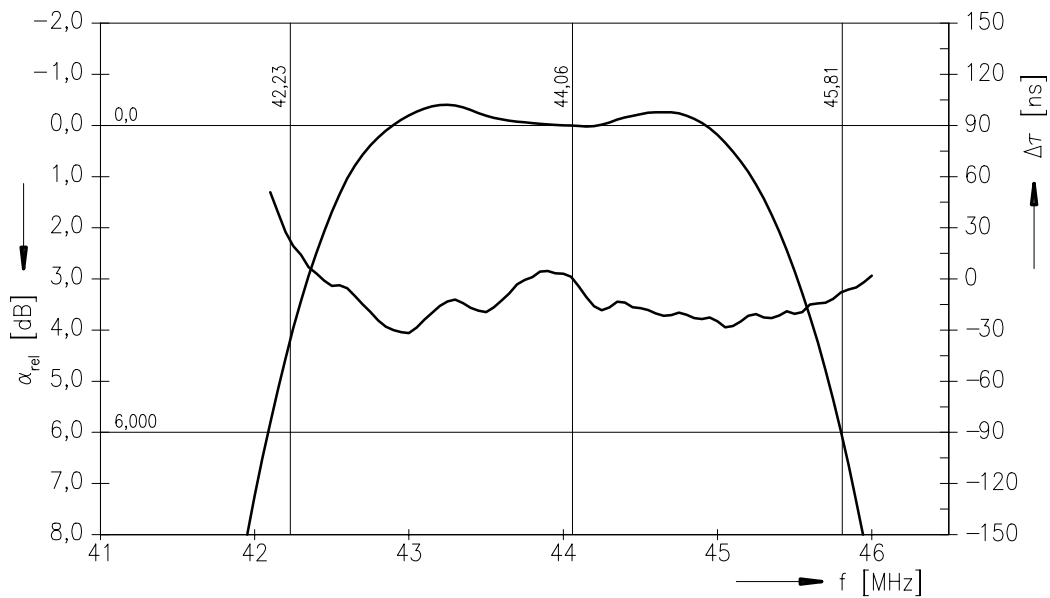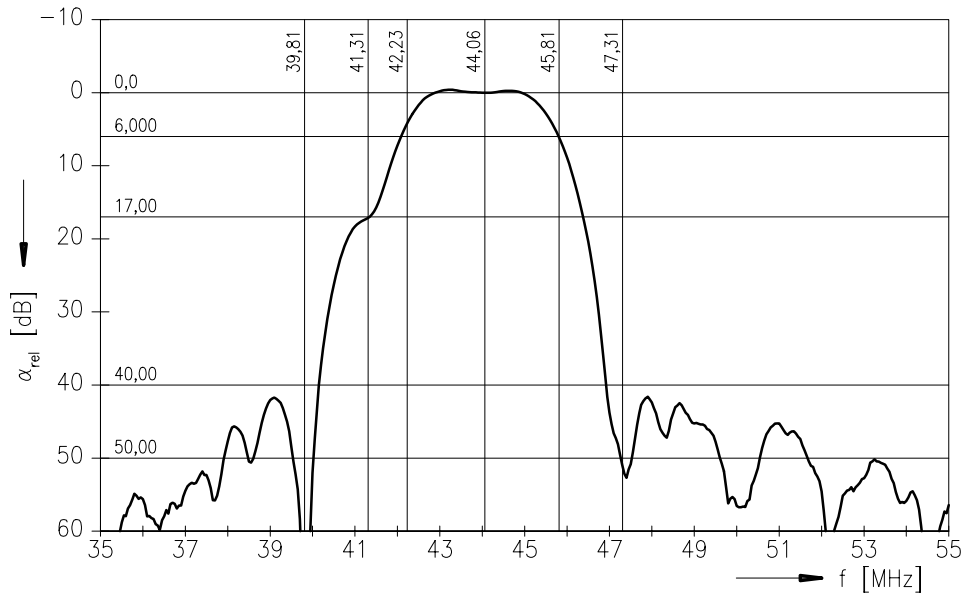



SAW Components


M 1871 M

IF Filter for Intercarrier Applications


45,75 MHz

Data Sheet

Frequency response

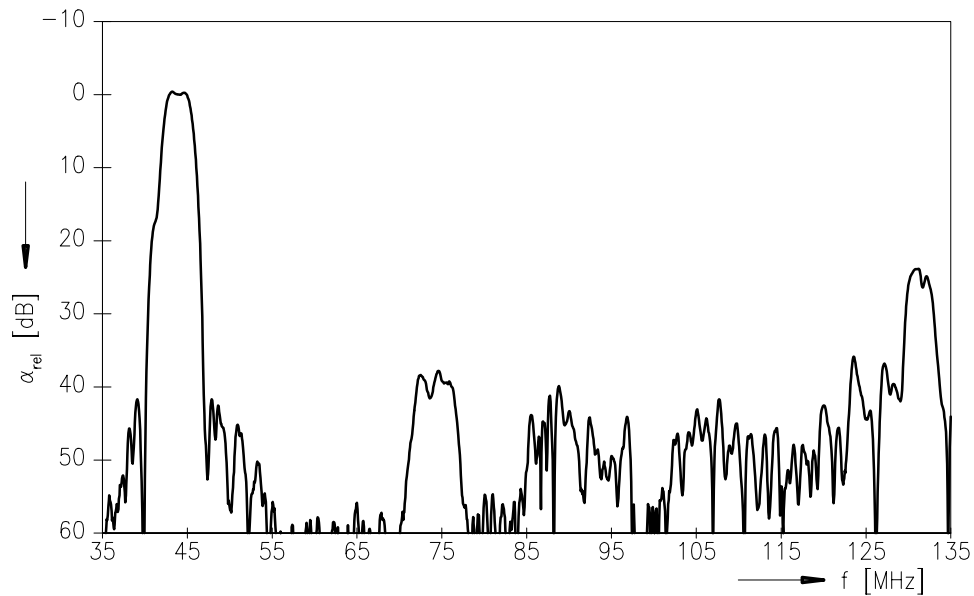

Time domain response

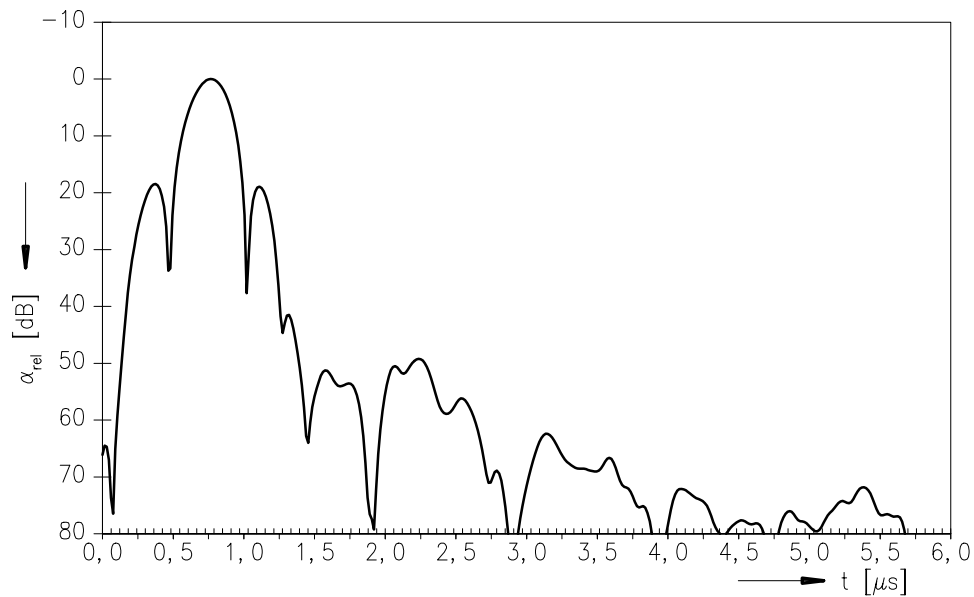



**SAW Components**

**M 1871 M**

**IF Filter for Intercarrier Applications**

**45,75 MHz**

Data Sheet

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW CE MM PD**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.