



SAW Components

Data Sheet B7812





SAW Components

B7812

Low-Loss Filter for Mobile Communication

1747,50 MHz

Data Sheet




Chip sized SAW package

Features

- Low-loss RF filter for mobile telephone PCN systems, transmit path
- High selectivity
- Usable passband 75 MHz
- No matching network required for operation at 50 Ω
- Ceramic package for **Surface Mounted Technology (SMT)**

Terminals


- Ni, gold-plated

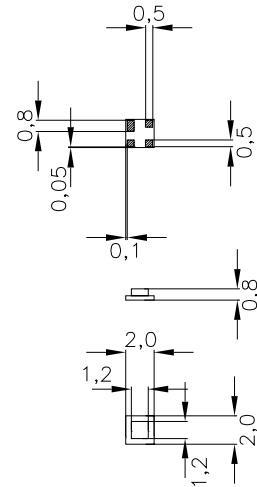

Dimensions in mm, approx. weight 0,01 g

Pin configuration

- 2 Input
- 1 Input - ground
- 3 Output
- 4 Output - ground



Type	Ordering code	Marking and Package according to	Packing according to
B7812	B39172-B7812-A510	C61157-A7-A63	F61074-V8099-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 20/+ 80	°C	source and load impedance 50 Ω peak power of GSM signal, duty cycle 2 : 8 continuous wave
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	0	V	
Input power max. 1710 ... 1785 MHz	P_{IN}	5	dBm	
elsewhere		0	dBm	



Data Sheet



Characteristics

Operating temperature range: $T = 25 \pm 2^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	1747,5	—	MHz
Maximum insertion attenuation	α_{\max}				
1710,0 ... 1785,0 MHz		—	2,6	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1710,0 ... 1785,0 MHz		—	1,2	1,6	dB
Input VSWR					
1710,0 ... 1785,0 MHz		—	2,0	2,2	
Output VSWR					
1710,0 ... 1785,0 MHz		—	2,0	2,2	
Attenuation	α				
10,0 ... 1670,0 MHz		15,0	17,0	—	dB
1670,0 ... 1690,0 MHz		8,0	17,0	—	dB
1805,0 ... 1880,0 MHz		8,0	12,0	—	dB
1880,0 ... 3500,0 MHz		15,0	15,0	—	dB
3500,0 ... 5200,0 MHz		12,0	14,0	—	dB



SAW Components

B7812

Low-Loss Filter for Mobile Communication

1747,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -10$ to $+80^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	1747,5	—	MHz
Maximum insertion attenuation	α_{\max}				
1710,0 ... 1785,0 MHz		—	3,0	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1710,0 ... 1785,0 MHz		—	1,6	2,1	dB
Input VSWR					
1710,0 ... 1785,0 MHz		—	2,2	2,4	
Output VSWR					
1710,0 ... 1785,0 MHz		—	2,2	2,4	
Attenuation	α				
10,0 ... 1670,0 MHz		15,0	17,0	—	dB
1670,0 ... 1690,0 MHz		6,0	15,0	—	dB
1805,0 ... 1880,0 MHz		6,0	10,0	—	dB
1880,0 ... 3500,0 MHz		15,0	15,0	—	dB
3500,0 ... 5200,0 MHz		12,0	14,0	—	dB



SAW Components

B7812

Low-Loss Filter for Mobile Communication

1747,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -20$ to $+70^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	1747,5	—	MHz
Maximum insertion attenuation	α_{\max}				
1710,0 ... 1785,0 MHz		—	3,0	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1710,0 ... 1785,0 MHz		—	1,6	2,1	dB
Input VSWR					
1710,0 ... 1785,0 MHz		—	2,2	2,4	
Output VSWR					
1710,0 ... 1785,0 MHz		—	2,2	2,4	
Attenuation	α				
10,0 ... 1670,0 MHz		15,0	17,0	—	dB
1670,0 ... 1690,0 MHz		6,0	15,0	—	dB
1805,0 ... 1880,0 MHz		6,0	10,0	—	dB
1880,0 ... 3500,0 MHz		15,0	15,0	—	dB
3500,0 ... 5200,0 MHz		12,0	14,0	—	dB



SAW Components

B7812


Low-Loss Filter for Mobile Communication

1747,50 MHz


Data Sheet



Transfer function (spec for 25° C)

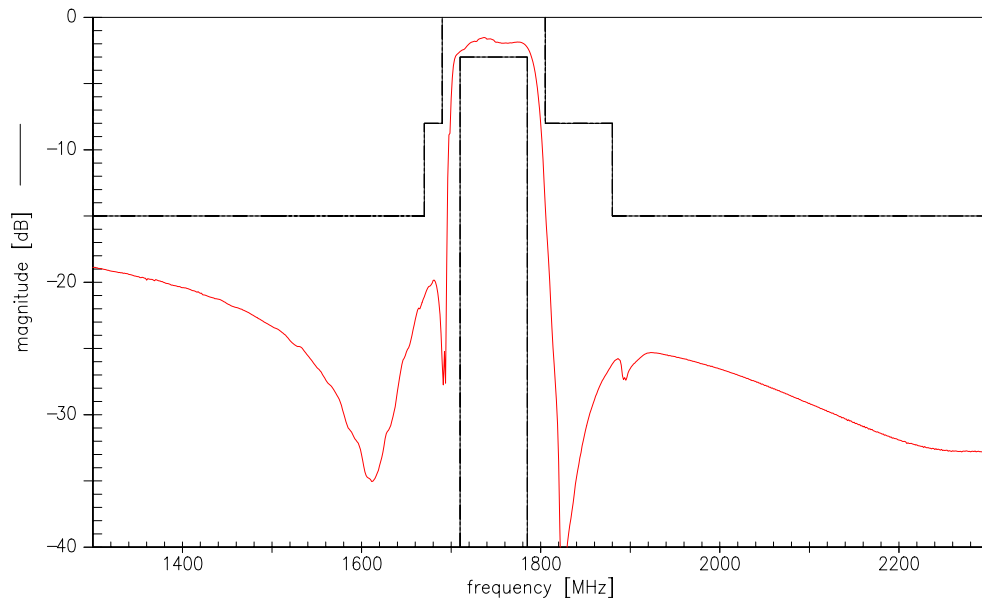

Transfer function (wideband)

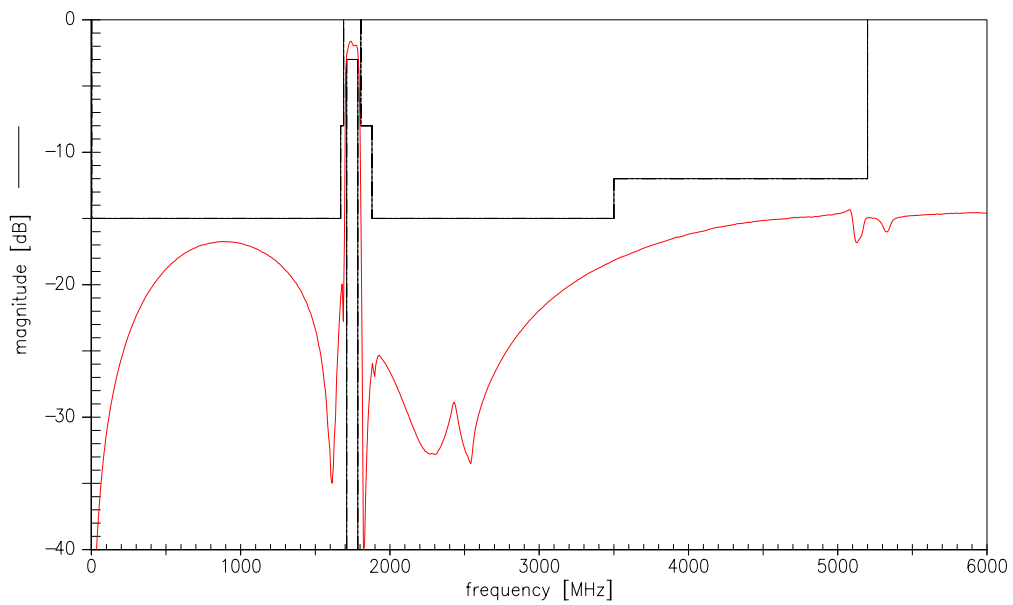



SAW Components

B7812

Low-Loss Filter for Mobile Communication

1747,50 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2002. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.